


HONEYWELL PART NUMBER
111SM119-H2
PRODUCT CODE TYJ5929

REV	DOCUMENT	CHANGED BY	CHECK
5	0040331	KVS 02JUN08	ASD

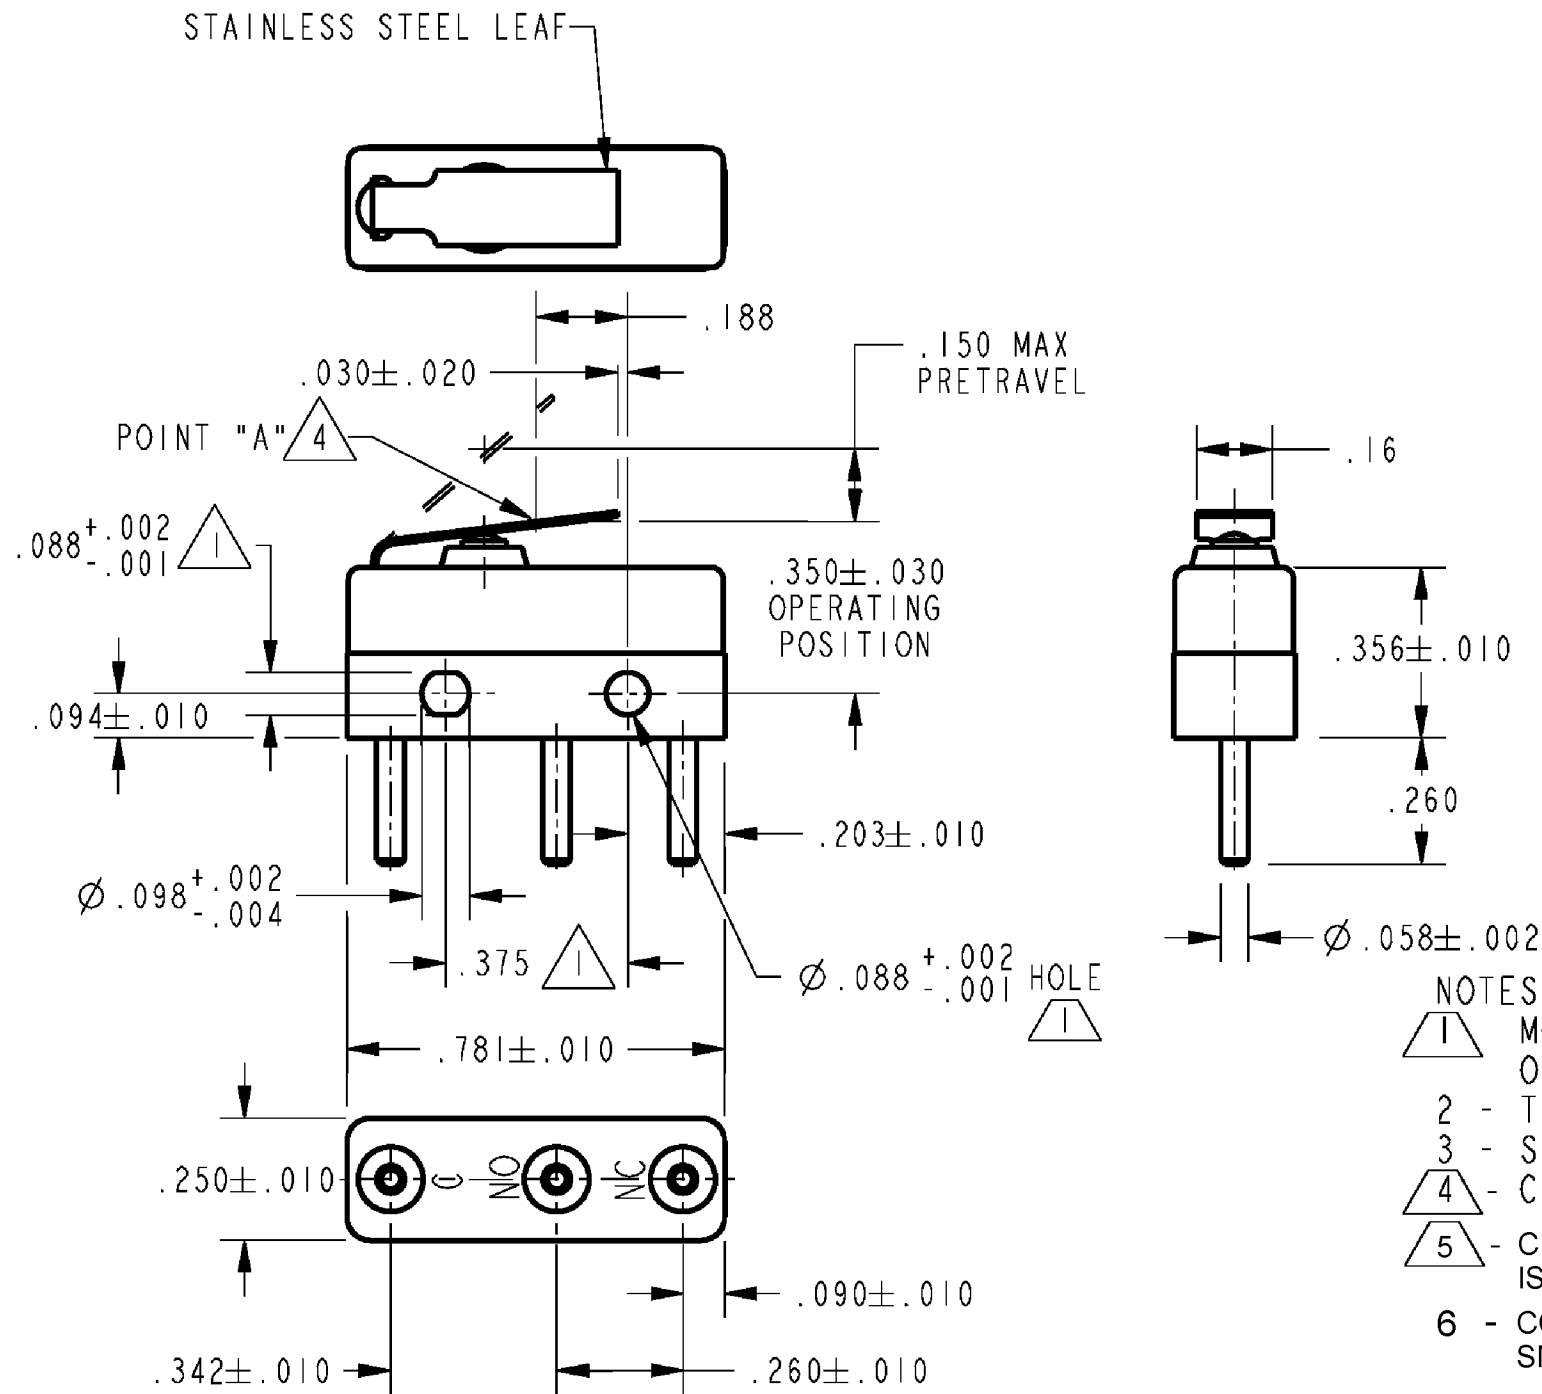

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 4 - CHARACTERISTICS TAKEN AT POINT "A"
- 5 - CUSTOMER'S TARGET DIFF TRAVEL RANGE AT POINT "A" ON LEAF IS 0.0060-0.0095
- 6 - CORRESPONDS TO NASON PART NUMBER SM-1326

RELEASE NO.	PR - 19879
REPLACES	X94391 - SM

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± - THIRD ANGLE PROJECTION	DRAWN	VK	29OCT 07	Honeywell			
OPERATING FORCE — — — -12 OZ MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	29OCT 07				
RELEASE FORCE — — — — 2 OZ MIN	30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.	TITLE SWITCH - BASIC					
DIFFERENTIAL TRAVEL — — — — .005 MIN		SEA LEVEL	50,000 FT								
OVERTRAVEL — — — — — .011 MIN	INDUCTIVE	3 AMP	2.5 AMP								
	RESISTIVE	5 AMP	5 AMP								
	MAXIMUM INRUSH 24 AMP										
	APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
		UL, CSA	5A, 250 VAC		B	I	111SM119-H2	5			
					RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1