
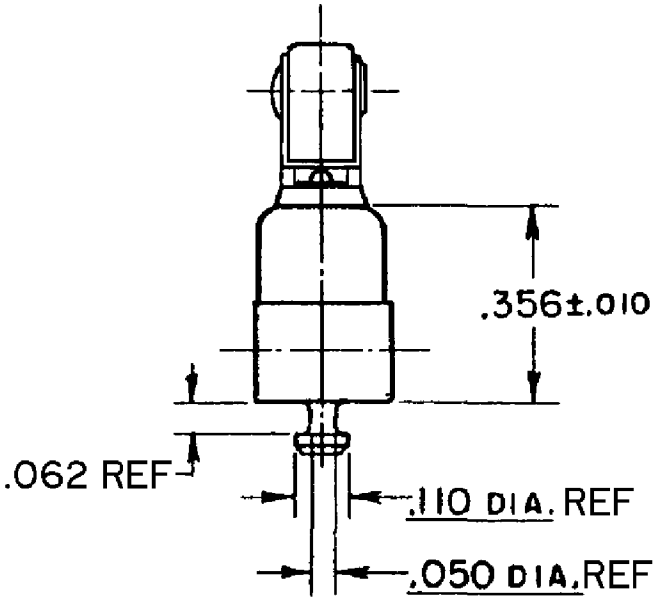


HONEYWELL PART NUMBER
111SM127-T
PRODUCT CODE
TYJ9276

REV	DOCUMENT	CHANGED BY	CHECK
A	0055407	SSK 19AUG09	CMH

.187 DIA. X .125 WIDE OIL BRONZE
ROLLER. (.005 T.I.R.)

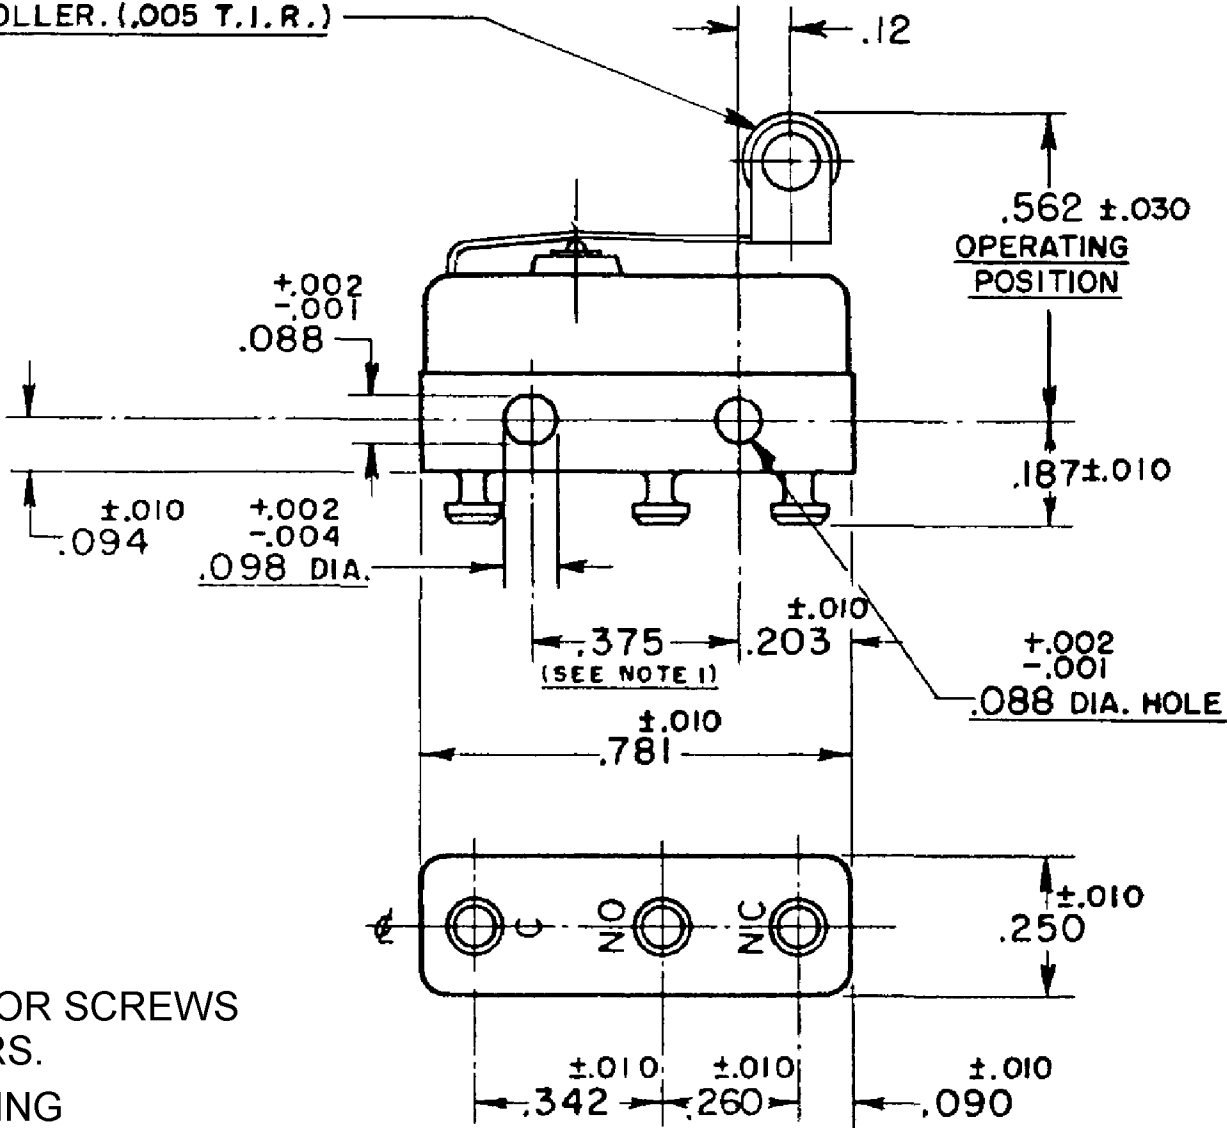

NOTES:

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX. DIA. ON .375±.002 CENTERS.
- 2 - TERMINALS ARE PLATED FOR SOLDERING

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - - 7 OZ MAX	CONTACT ARRANGEMENT SPDT
RELEASE FORCE - - - - 2 OZ MIN	30 VOLTS DC RATING
PRETRAVEL - - - - .219 MAX	SEA LEVEL 50,000 FT
DIFFERENTIAL TRAVEL - - .025 MAX	INDUCTIVE 3 AMP 2.5 AMP
OVERTRAVEL - - - - .030 MIN	RESISTIVE 5 AMP 5 AMP
	MAXIMUM INRUSH 24 AMP
	KEMA, CE 5A, 250V ~ T85 1E4
	UL, CSA 5A, 250 VAC ~
	UL 4A, 24VAC RES. 2A, 24VDC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACES x ± -
ONE PLACE .x ± .030
TWO PLACE .xx ± .015
THREE PLACE .xxx ± .005
ANGLES x ± -
THIRD ANGLE PROJECTION

DRAWN	SSK	19AUG09
CHECK	GM	19AUG09
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell					
TITLE SWITCH - BASIC					
SIZE	TYPE	CAGE CODE	DRAWING NAME	REV	
B	I	-	111SM127-T	A	
SCALE NONE			SHEET 1 OF 1		