


# Evaluation Board User's Guide

## ADC12EU050: Ultra-low Power, Octal, 12-bit, 40-50MSPS Sigma-Delta Analog-to-Digital Converter

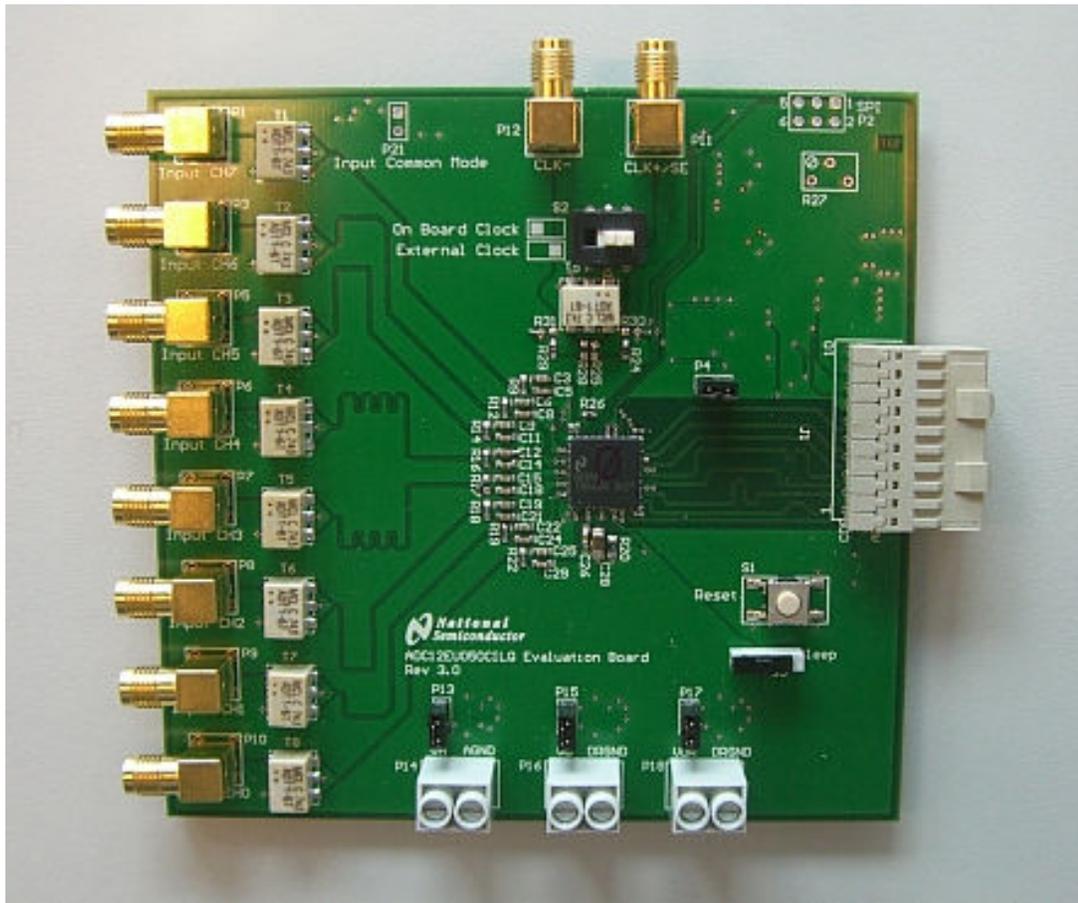

## Table of Contents

1.0 Introduction .....	3
2.0 Board Assembly.....	3
3.0 Quick Start.....	3
4.0 Functional Description.....	4
4.1 Analog Input.....	4
4.2 ADC reference.....	4
4.3 ADC input clock.....	4
4.4 Power Supply Connections.....	4
4.5 Reset.....	5
4.6 Sleep.....	5
4.7 Input Common Mode .....	5
4.8 Default Jumper and Switch Settings .....	5
5.0 Software and SPI Registers.....	6
5.1 SPI Registers .....	6
7.0 Hardware Schematic .....	7
8.0 Evaluation Board Layout.....	10
9.0 Evaluation Board Bill of Materials.....	14

## 1.0 Introduction

This Evaluation Board is used to evaluate one of the A/D Converter ADC12EU050. The ADC is a 12 bit converter that provides data at a rate of 40 – 50 MHz.

The evaluation board is designed to be used with the WaveVision5™ Data Capture Board which is connected to a personal computer through a USB port and running WaveVision5™ software, operating under Microsoft Windows. The software can perform an FFT on the captured data upon command and, in addition to a

frequency domain plot, shows dynamic performance in the form of SNR, SINAD, THD SFDR and ENOB.

## 2.0 Board Assembly

The ADC12EU050 Evaluation Board comes pre-assembled. Refer to the Bill of Materials in Section 8 for a description of components, to Figure 1 for major component placement and to Section 6 for the Evaluation Board schematic.

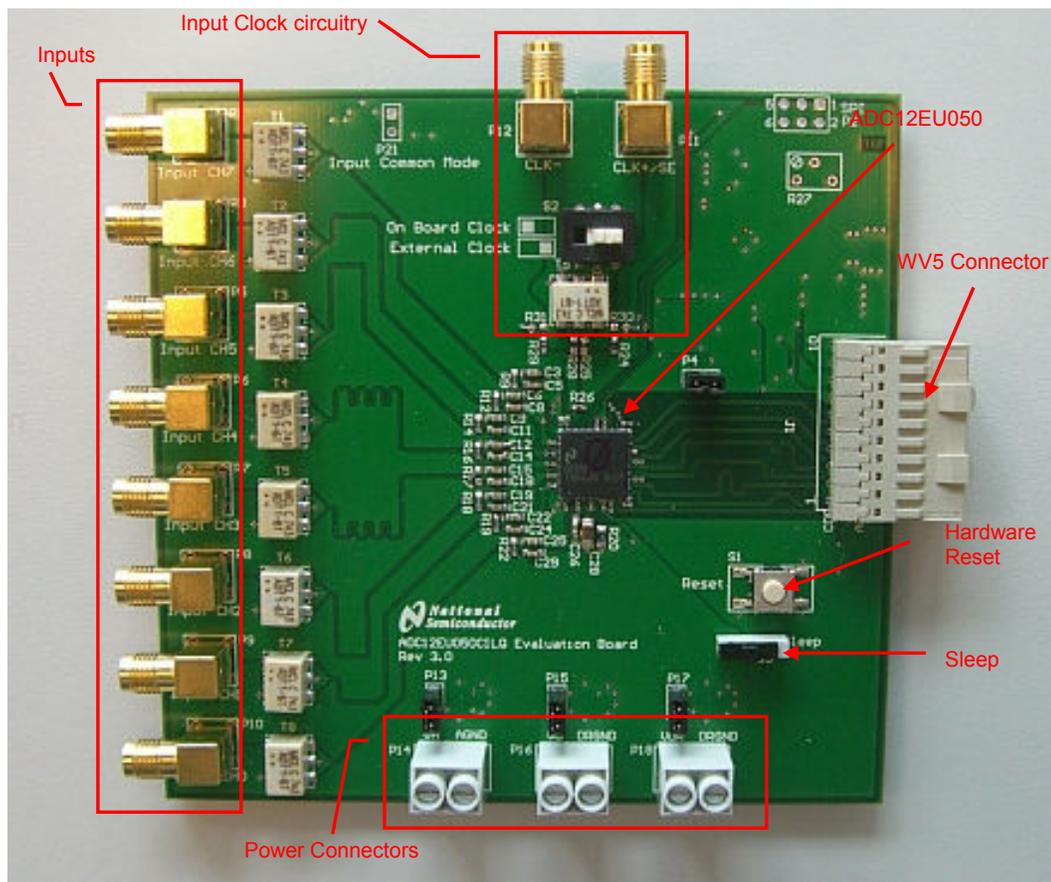


Figure 1: Major Component Locations

## 3.0 Quick Start

Refer to Figure 1 for locations of jumpers, test points and major components. The board is configured by default to use an on board crystal clock source and internal reference. Refer to Section 4.0 for detailed information on jumper settings.

You must have the WaveVision5™ software to test this board. You can download the latest version from the National Semiconductor website.

1. Connect the ADC12EU050 evaluation board to the WaveVision5™ Data Capture Board.
2. Apply power to the WaveVision5™ Data Capture Board.
3. Connect power to the ADC12EU050 board as described in section 4.4, and power it up.
4. Connect the WaveVision5™ board to the computer using a USB cable.
5. Start the WaveVision5™ software.
6. Connect a signal from a 50-Ohm source to connector a channel input. Be sure to use a bandpass filter before the Evaluation Board.
7. Adjust the input signal amplitude as needed to ensure that the signal does not over-range by examining an FFT of the output data with the WaveVision™ software.

## 4.0 Functional Description

The ADC12EU050 Evaluation Board schematic is shown in Section 6. A list of default switch and jumper settings can be found in section 4.10.

### 4.1 Analog Input

The analog input is supplied through standard SMA connectors. The evaluation board is designed for single ended inputs, which are converted to differential by the transformers.

It must be ensured that a high quality signal source is used so that the ADC dynamic performance can be properly evaluated. A bandpass filter on the input signal is highly recommended.

### 4.2 ADC reference

The ADC12EU050 can use an internal or external reference. This evaluation board is configured to use the internal reference.

### 4.3 ADC input clock

The ADC12EU050 can be clocked at 40-50MHz. The input clock circuit is shown in Figure 2 below.

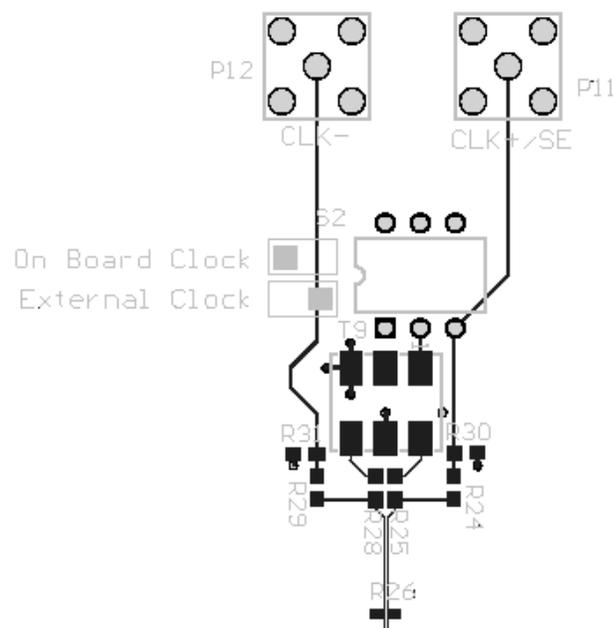


Figure 2: Input clock circuit.

A combination of 0 ohm resistors and a switch are used to select the path of the clock to the ADC. While not as convenient as pin-type jumpers, these introduce less noise into the clock signal.

Selecting "On Board Clock" with switch S2 enables an on board 50MHz crystal oscillator. The output of this oscillator is converted to differential by transformer T9 and routed to the CLK+ and CLK- input of the ADC.

Selecting "External Clock" with switch S2 disables the on-board crystal oscillator. It enables the user to connect a single ended clock to P11. This clock is converted to a differential signal by the transformer T9.

The external clock amplitude and waveform are fairly flexible, but a 600mVpp differential square wave at the chip inputs is recommended.

By changing the 0 ohm resistors R24, R25, R28 and R29 other clock input configurations can be realized. For example, a fully differential clock could be supplied, bypassing the on-board transformer.

If a single ended clock is supplied to the ADC, then the LVDS termination resistor, R26, must be removed.

### 4.4 Power Supply Connections

Power to the board is supplied through the power connectors P14, P16 and P18. The required voltages are shown in Figure 3 below, and described underneath.

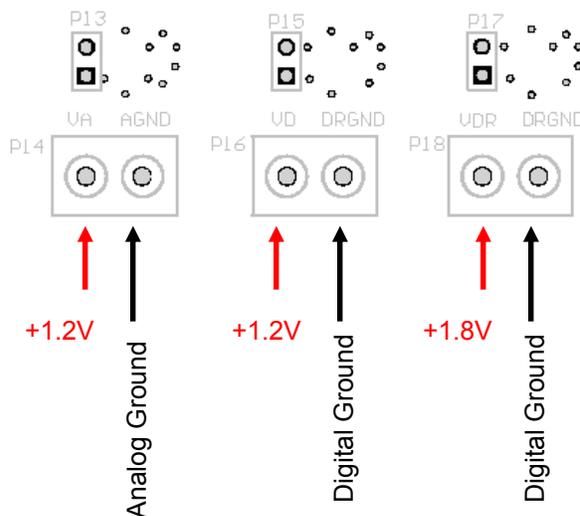


Figure 3: Power Supply Connectoins

P14: Analog power and ground

- ADC12EU050 analog supply, VA.
- Connect VA to 1.2V, AGND to ground
- Current can be measured across P13

P16: Digital power and ground

- ADC12EU050 digital supply, VD.
- Connect VD to 1.2V, DRGND to ground
- Current can be measured across P15

P18: Output driver power and ground

- ADC12EU050 output driver supply, VDR.
- Connect VDR to 1.8V, DRGND to ground (same as DRGND of P16)
- Current can be measured across P17

Generally, all grounds can be tied together, as can analog and digital supplies (VA and VD).

The datasheet for the ADC12EU050 specifies that the output driver supply voltage (VDR) can be 1.2V or 1.8V.

Due to the design of the evaluation system, specifically the distance from the ADC12EU050 to the Xilinx Virtex4 FPGA on the WaveVision5™ board and the connector through which the LVDS outputs are routed, VDR should be kept at 1.8V.

A VDR of 1.2V can be used, but in this case the LVDS current drive (I\_drive, SPI register 0x18, bits 3:2) must be increased to 5mA.

#### 4.5 Reset

The reset button pulls the RSTb pin of the ADC12EU050 low, resetting the ADC. The reset button only affects the ADC, not any other component on the board, or on the WaveVision5™ board.

#### 4.6 Sleep

The sleep switch puts the ADC input sleep mode, by connecting the SLEEP pin to VDR.

#### 4.7 Input Common Mode

Jumper P21 can be used to force a common mode on the ADC inputs. In its default configuration, the evaluation board has capacitively coupled ADC inputs, and using the Input Common Mode jumper will not have any effect.

#### 4.8 Default Jumper and Switch Settings

On delivery, the board's jumpers and switches should be set as defined in the table below. Any directions are defined when the board is positioned as in Figure 1.

Jumper or Switch	Default Position
P2	Open
P4	Closed
P13	Closed
P15	Closed
P17	Closed
P21	Open
S2	Left (On Board Clock)
S3	Left (Sleep mode not active)

## **5.0 Software and SPI Registers**

The ADC12EU050 evaluation board is designed to be used with the WaveVision5™ data capture board and software. The latest version of the WaveVision5™ software must be used.


### **5.1 SPI Registers**


As described in the ADC12EU050 datasheet, there are many user registers accessible via the SPI interface.

These registers can all be programmed via the “Registers” tab in the WaveVision5™ software.


All registers and values are described in the ADC12EU050 datasheet, which is available from the National Semiconductor website.

# 7.0 Hardware Schematic

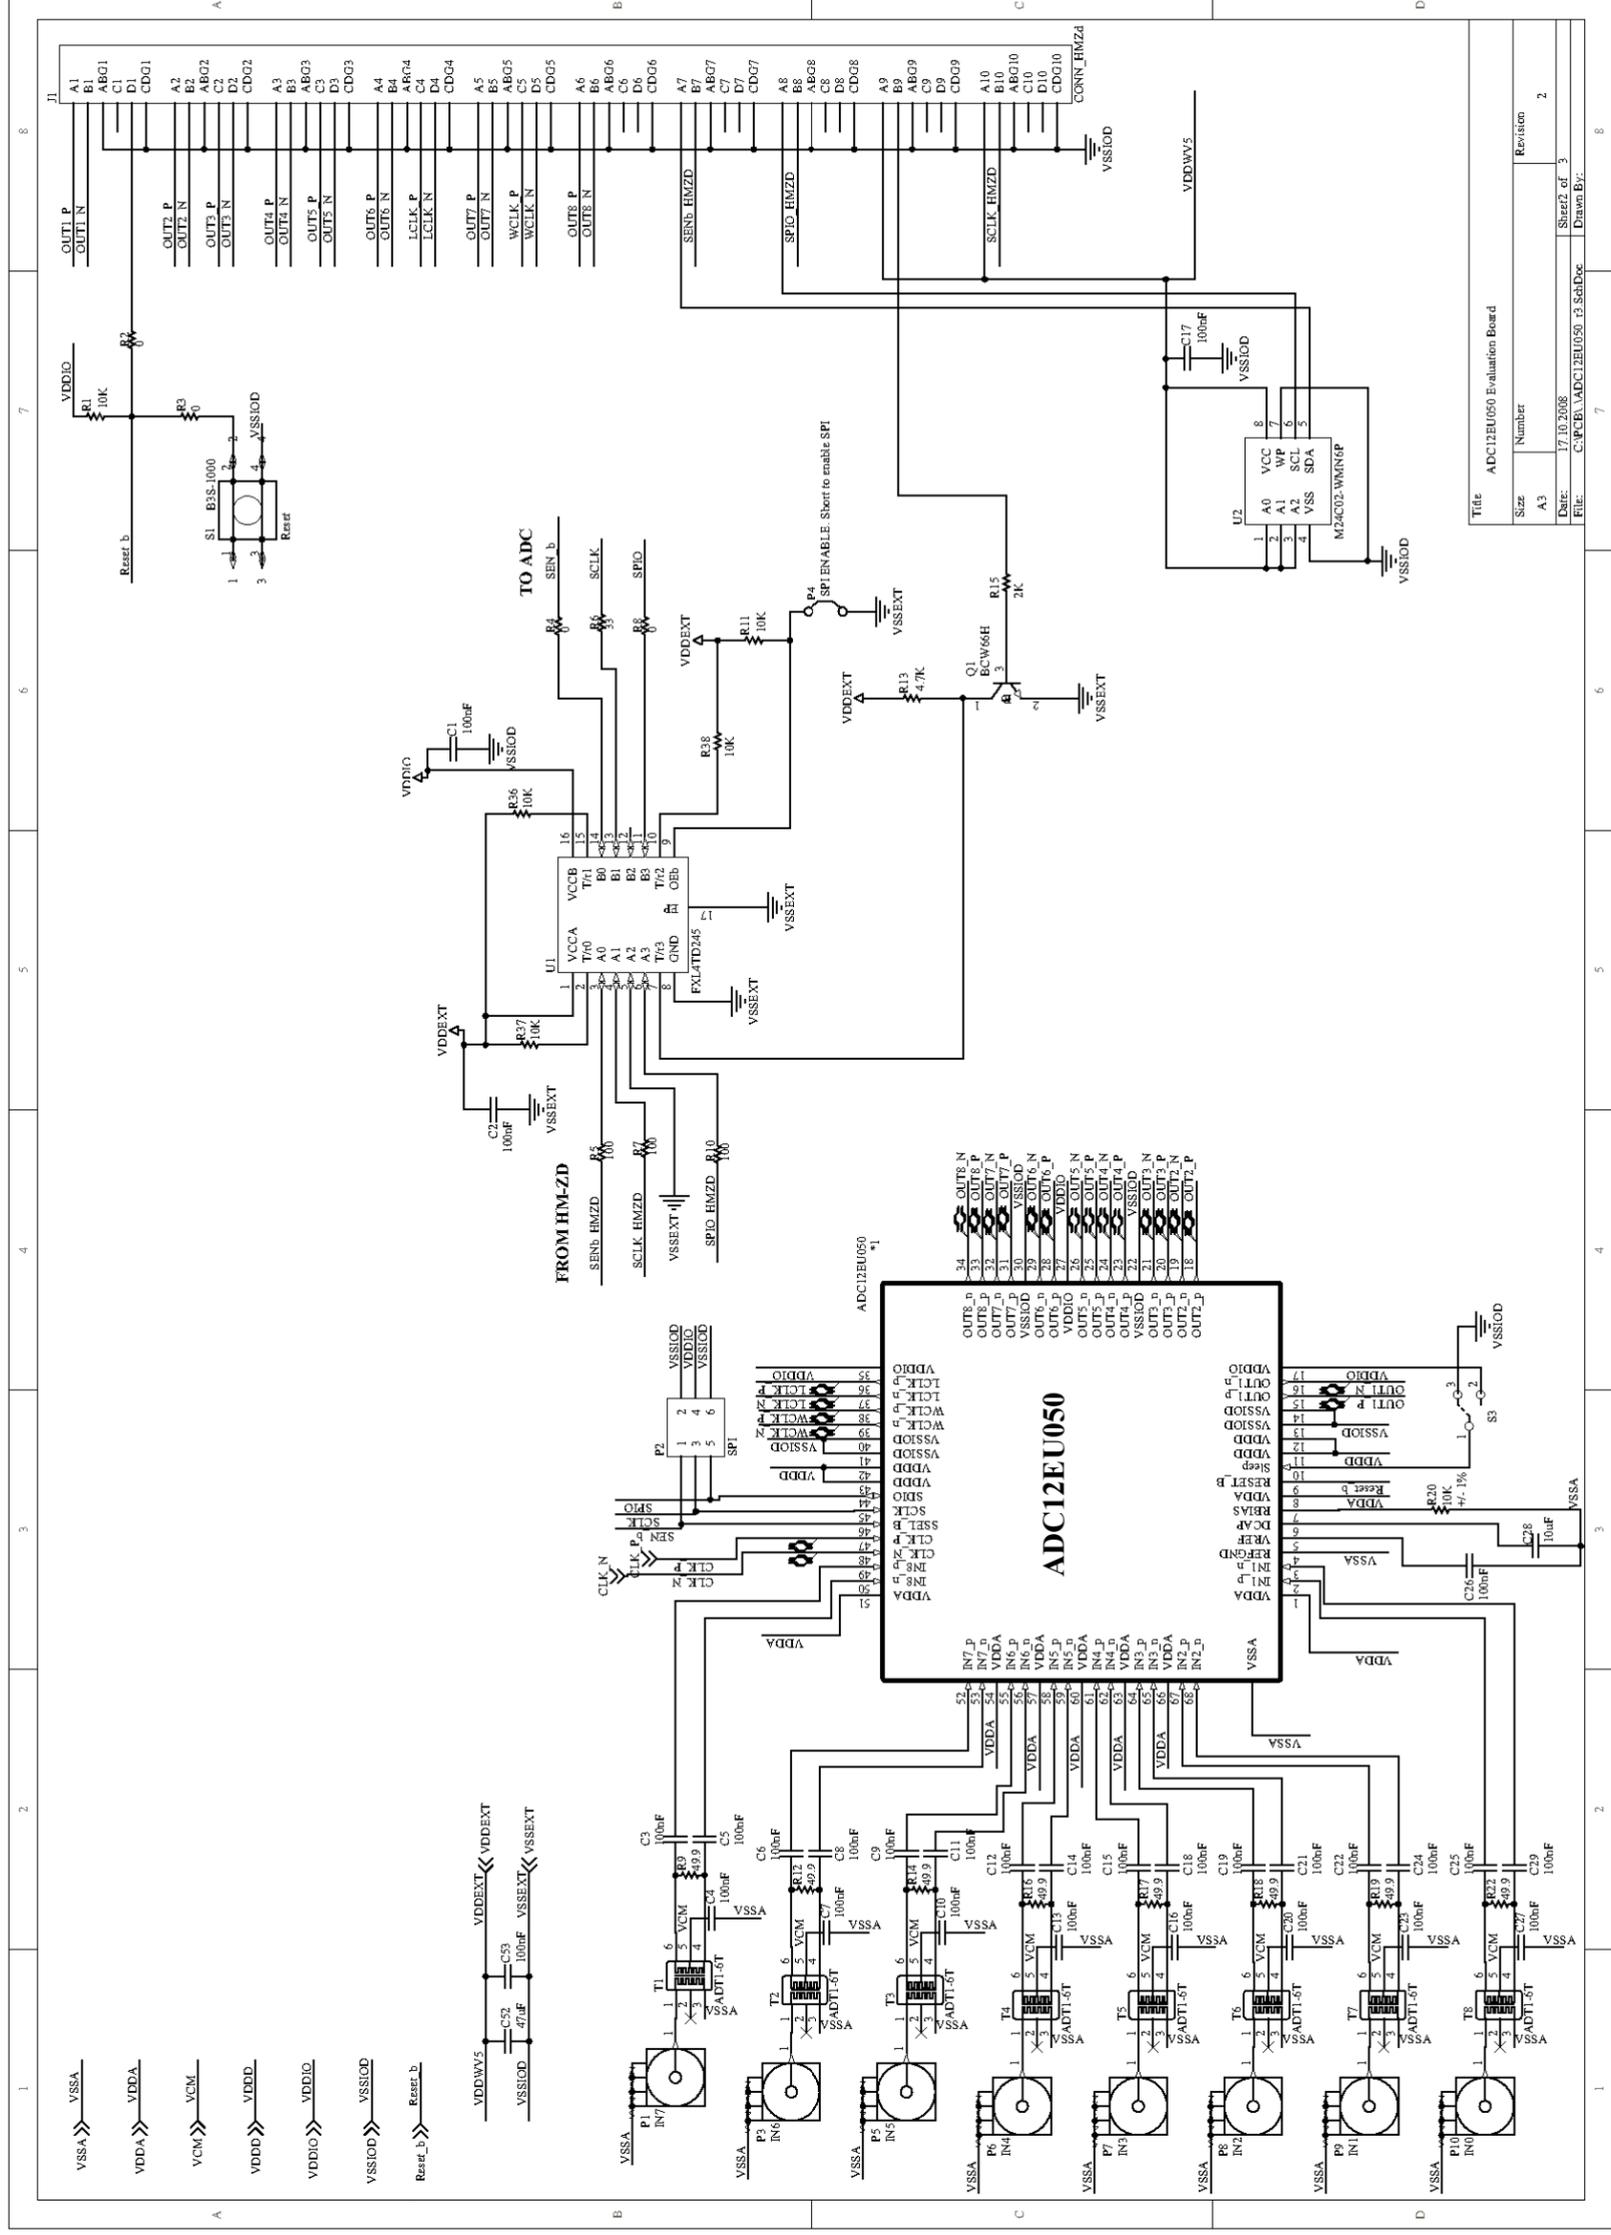

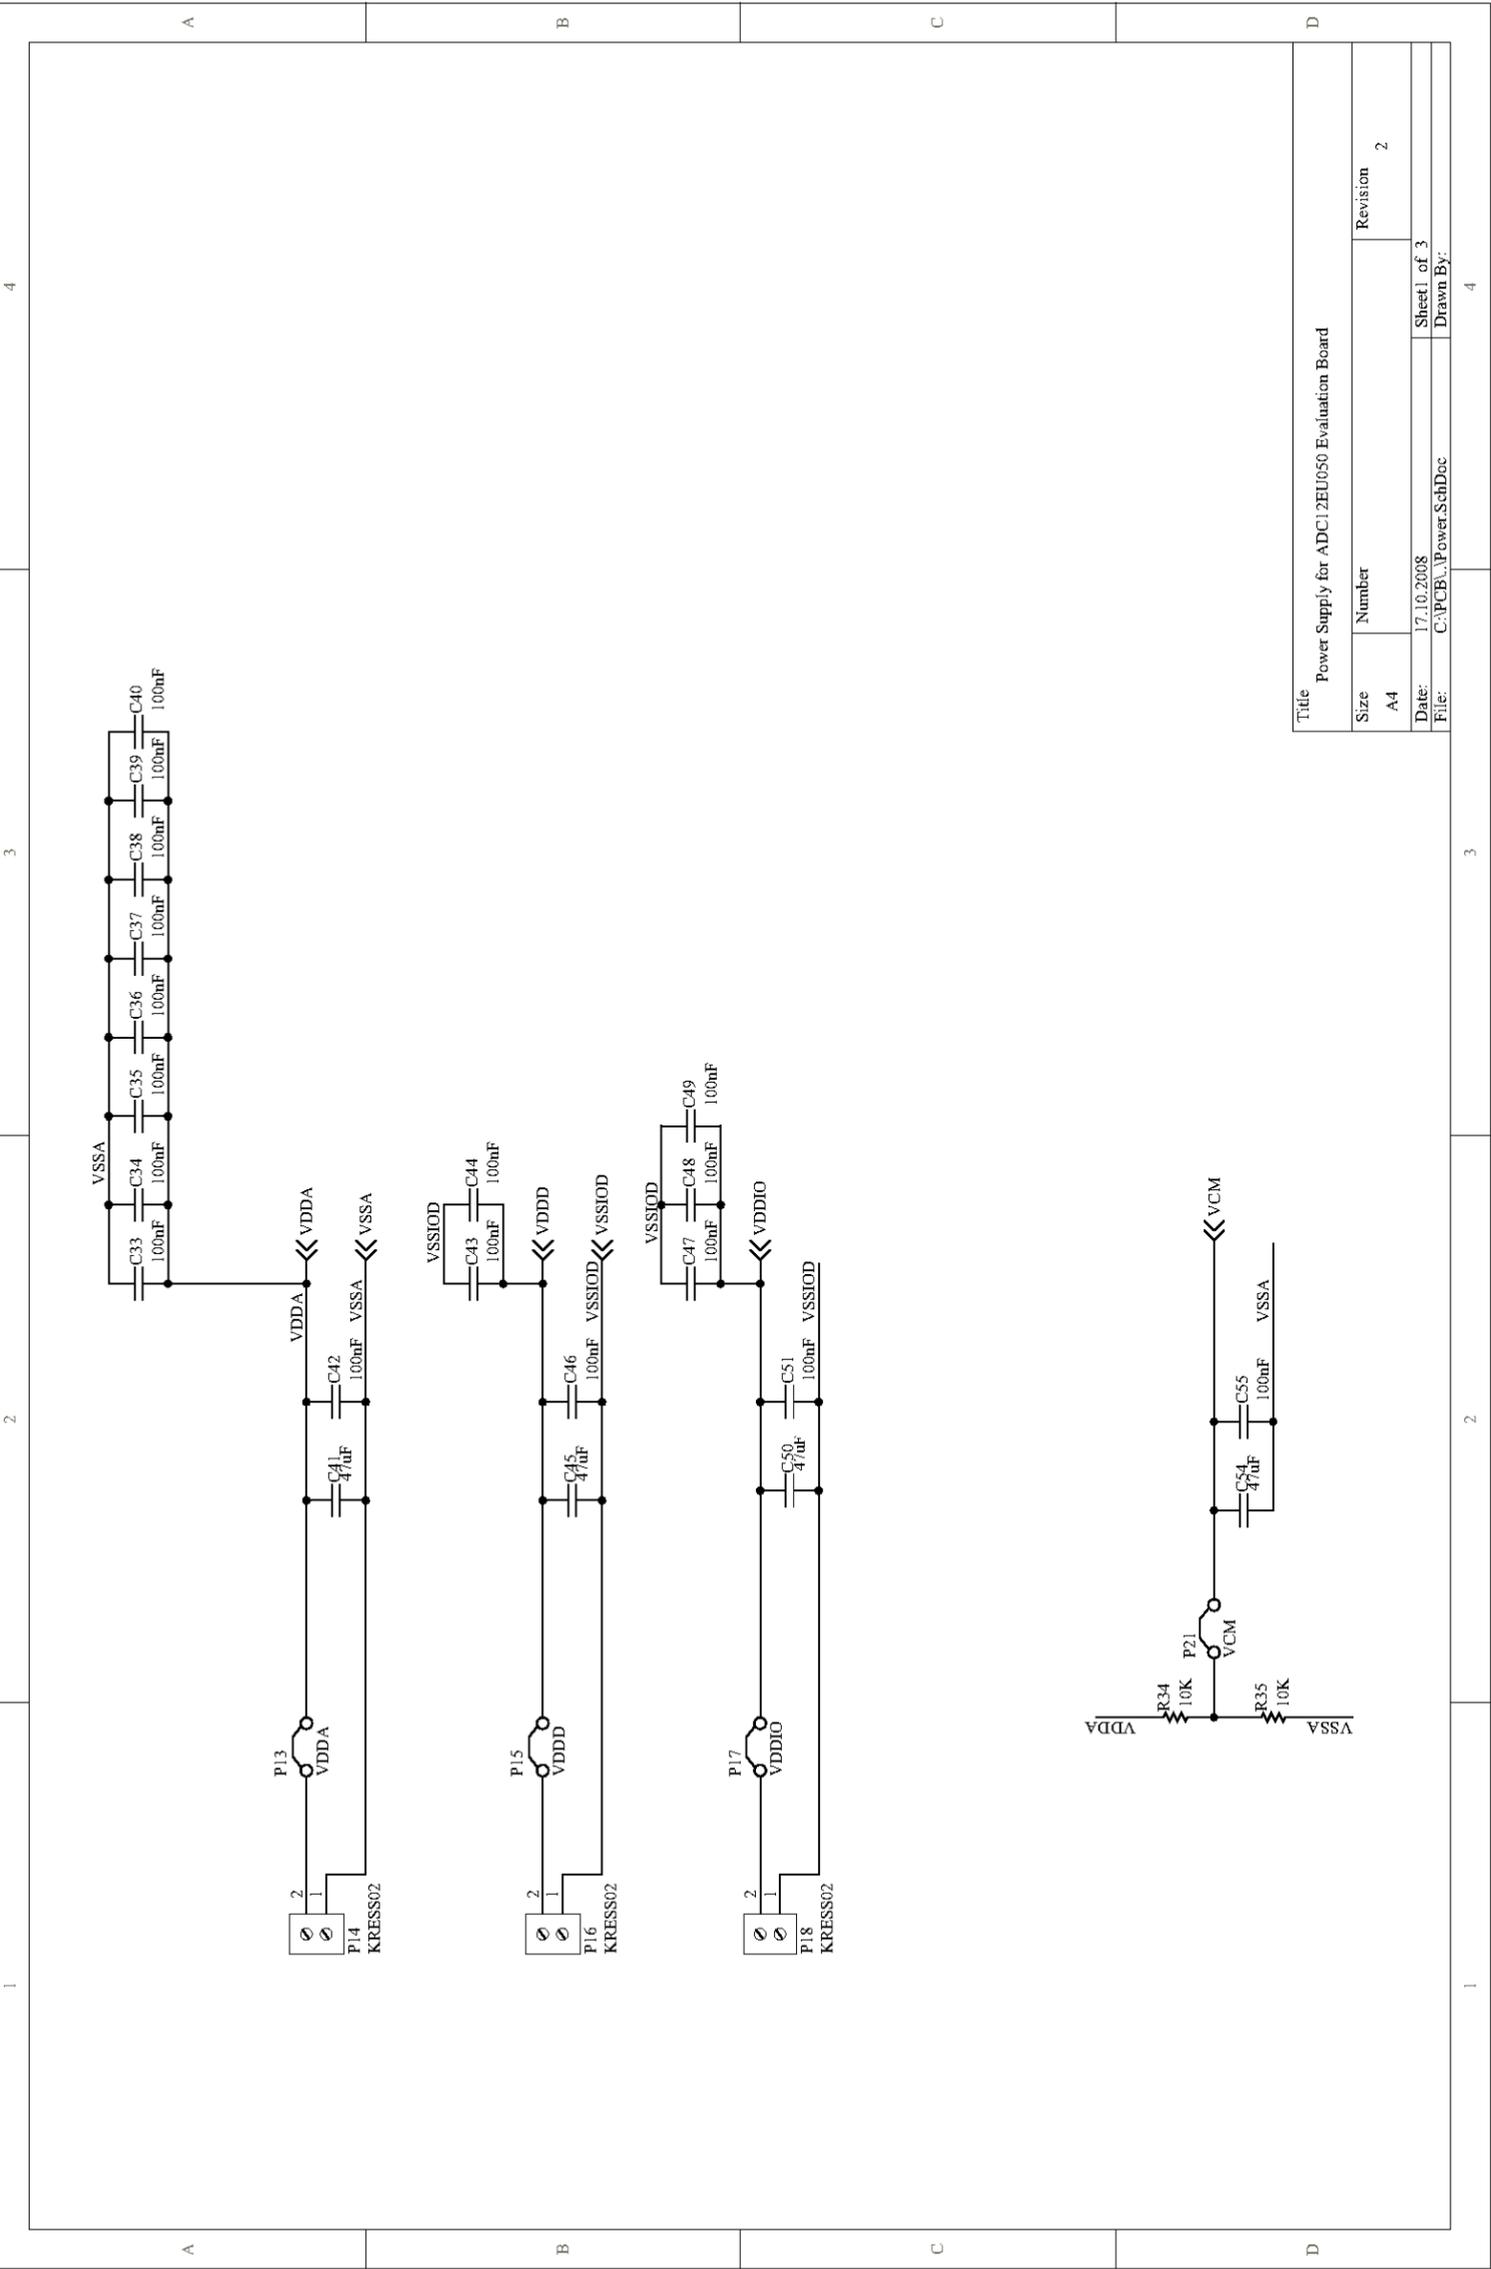


Title			
Power Supply for ADC12EU050 Evaluation Board			
Size	Number	Revision	
A4		2	
Date:	17.10.2008	Sheet 1 of 3	
File:	C:\PCB\PowerSchDoc	Drawn By:	

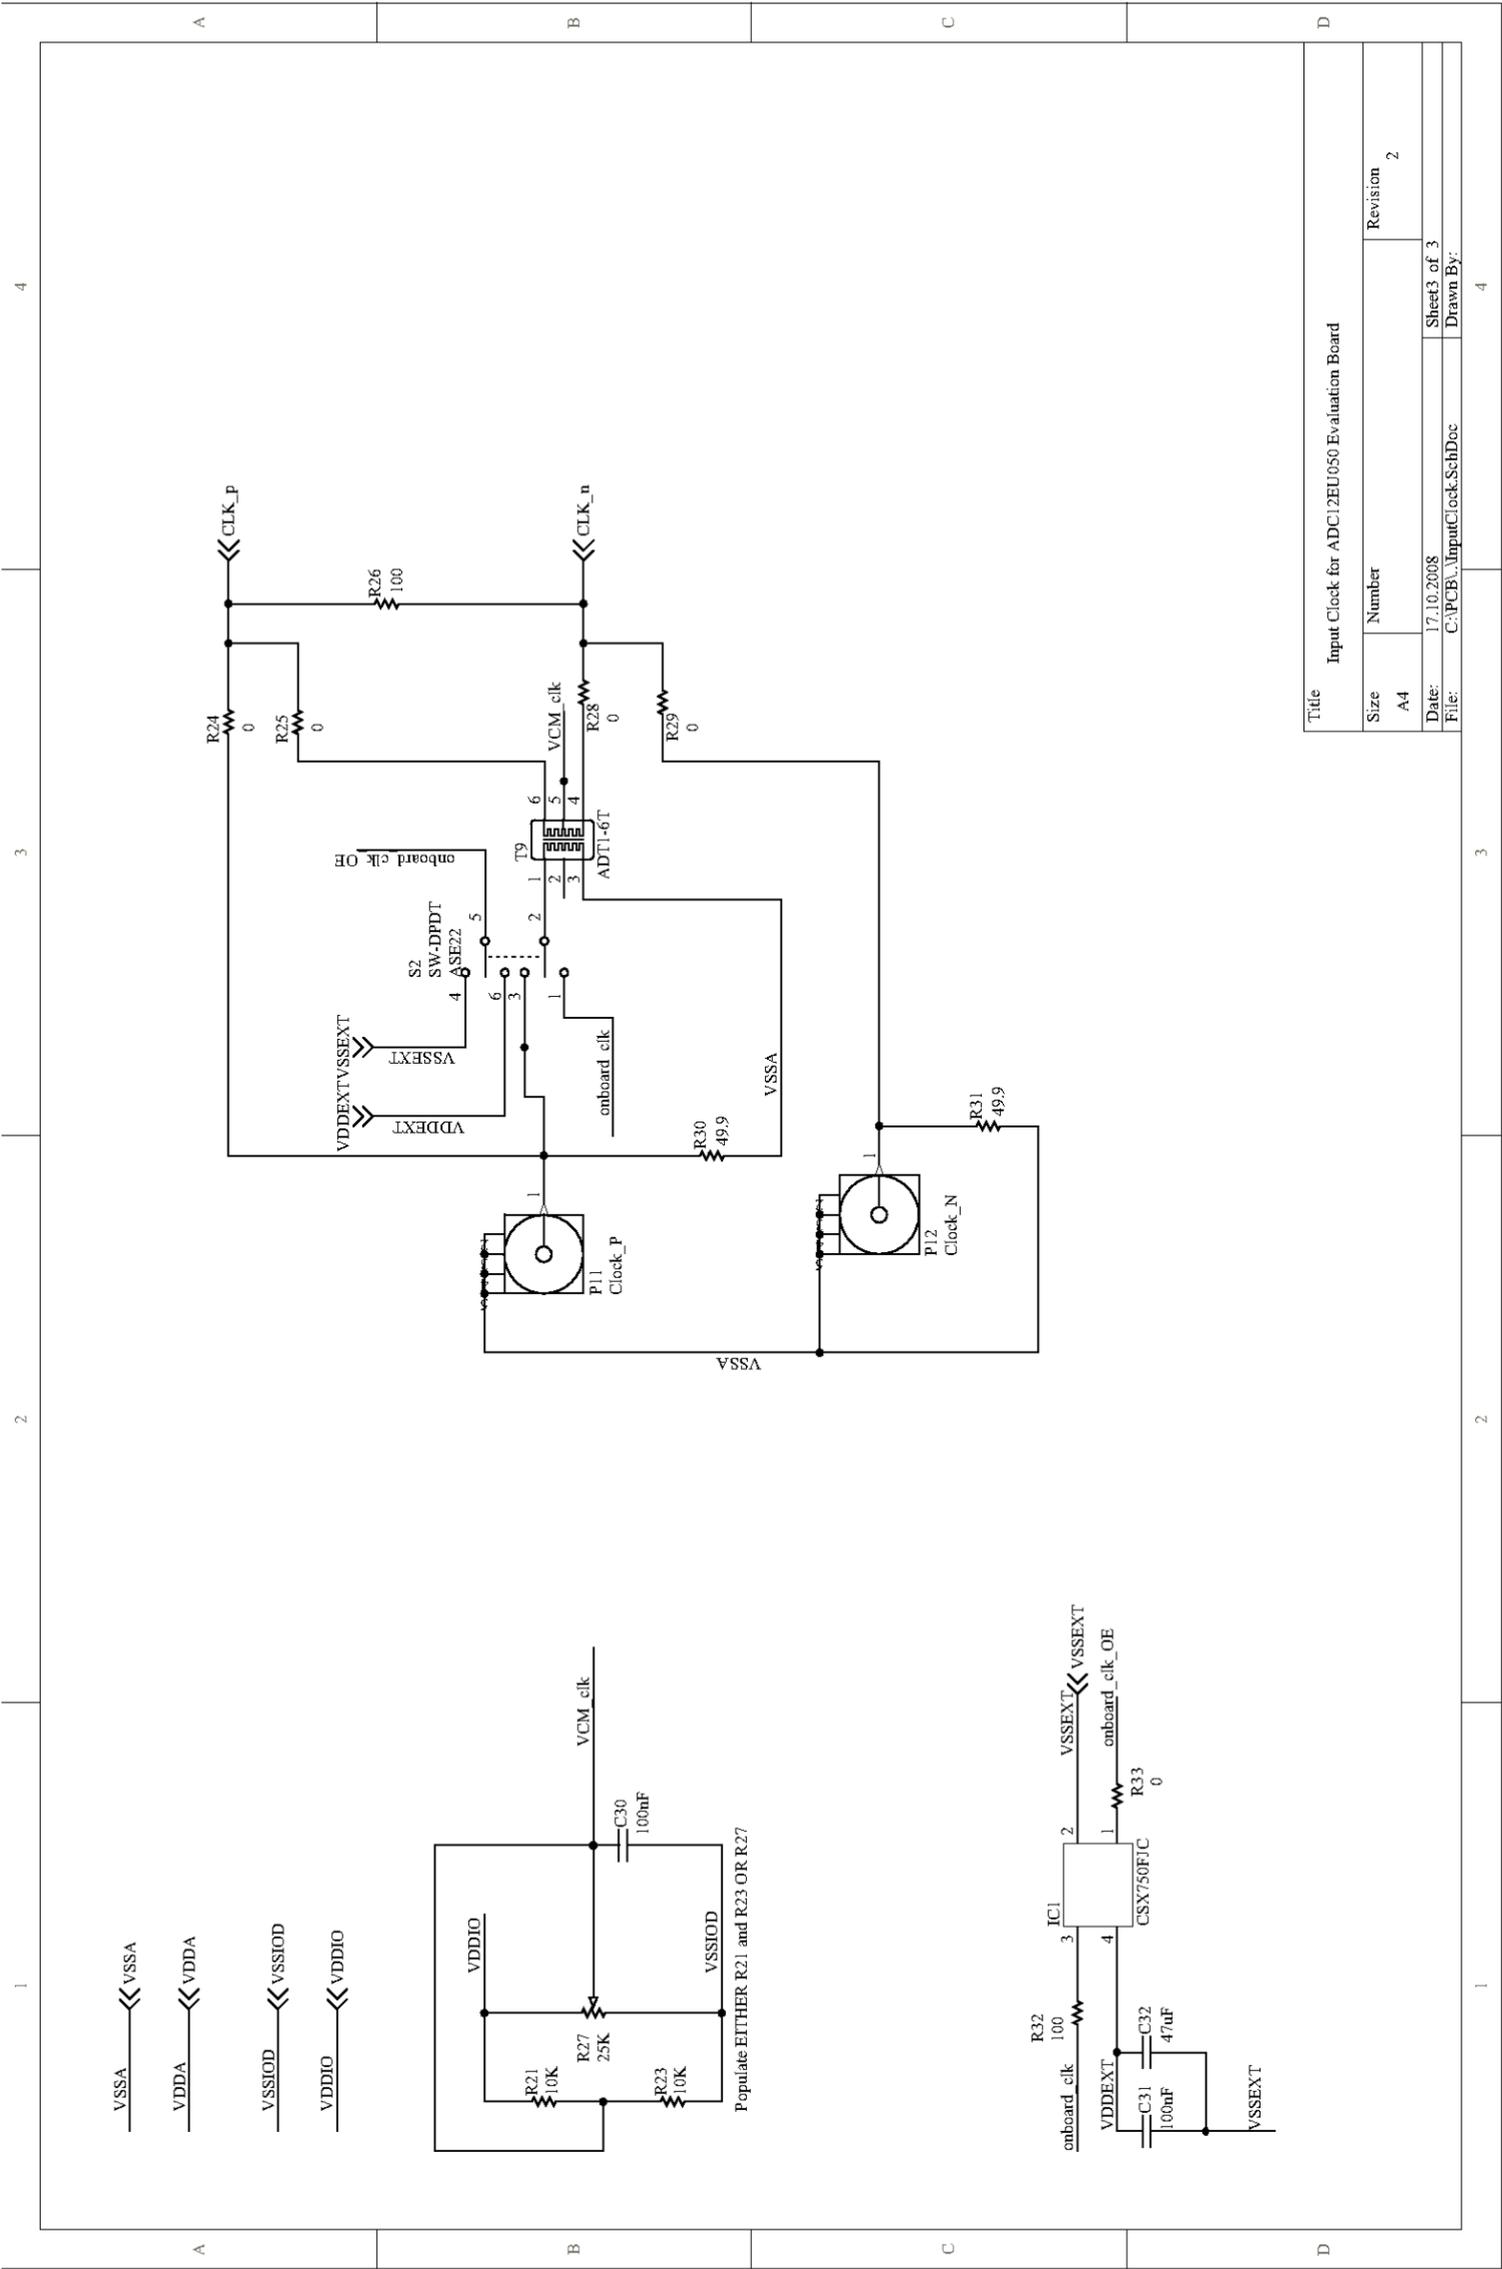


## 8.0 Evaluation Board Layout


Layer 1 : Top

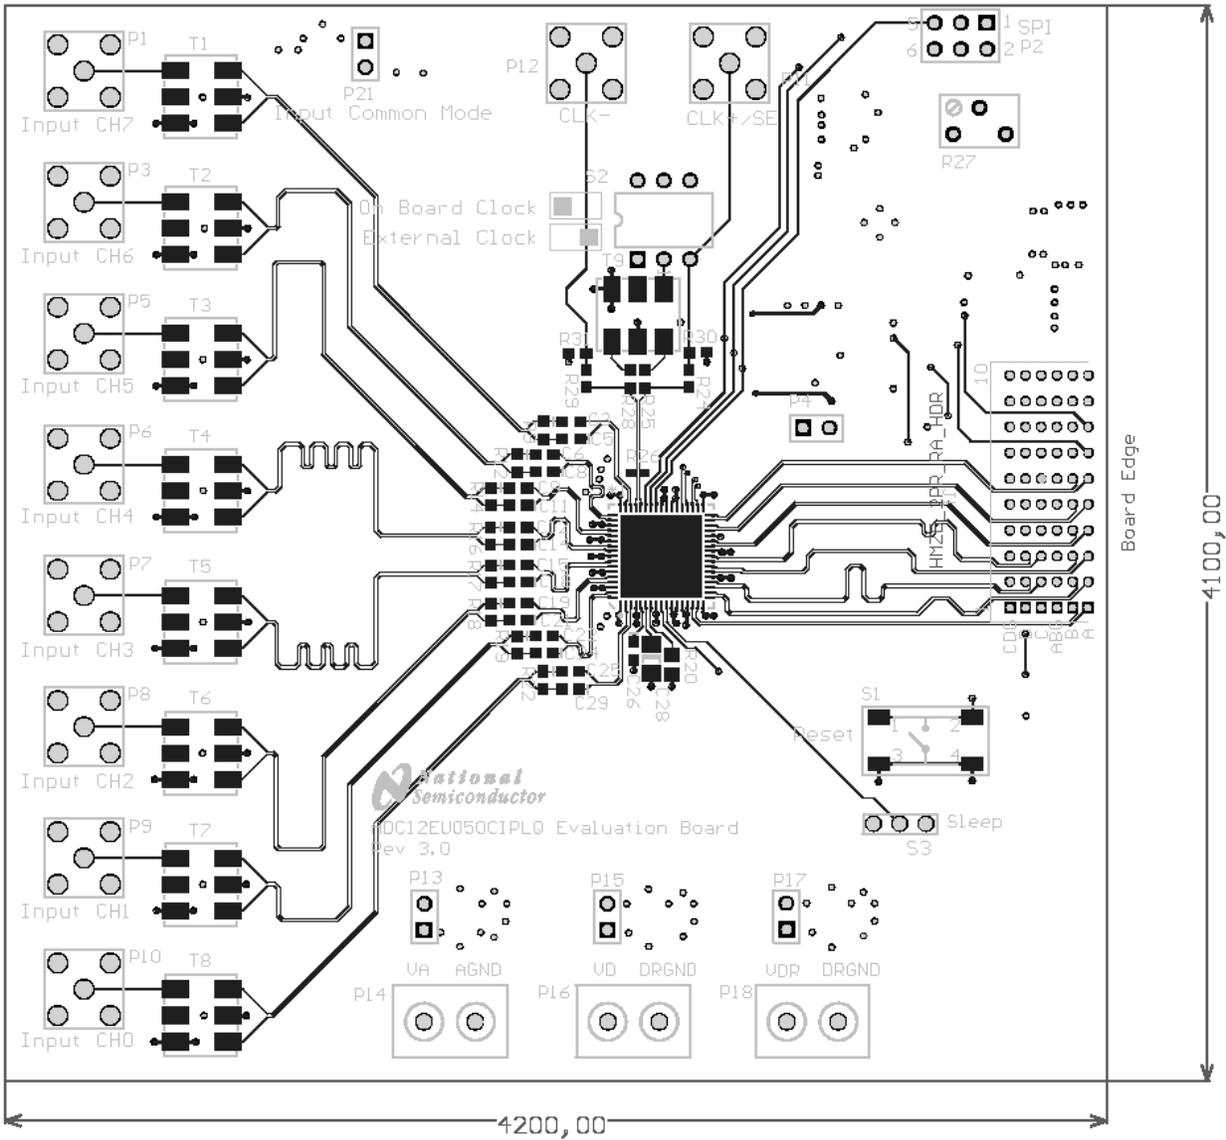


Layer 2 : Internal Ground Plane

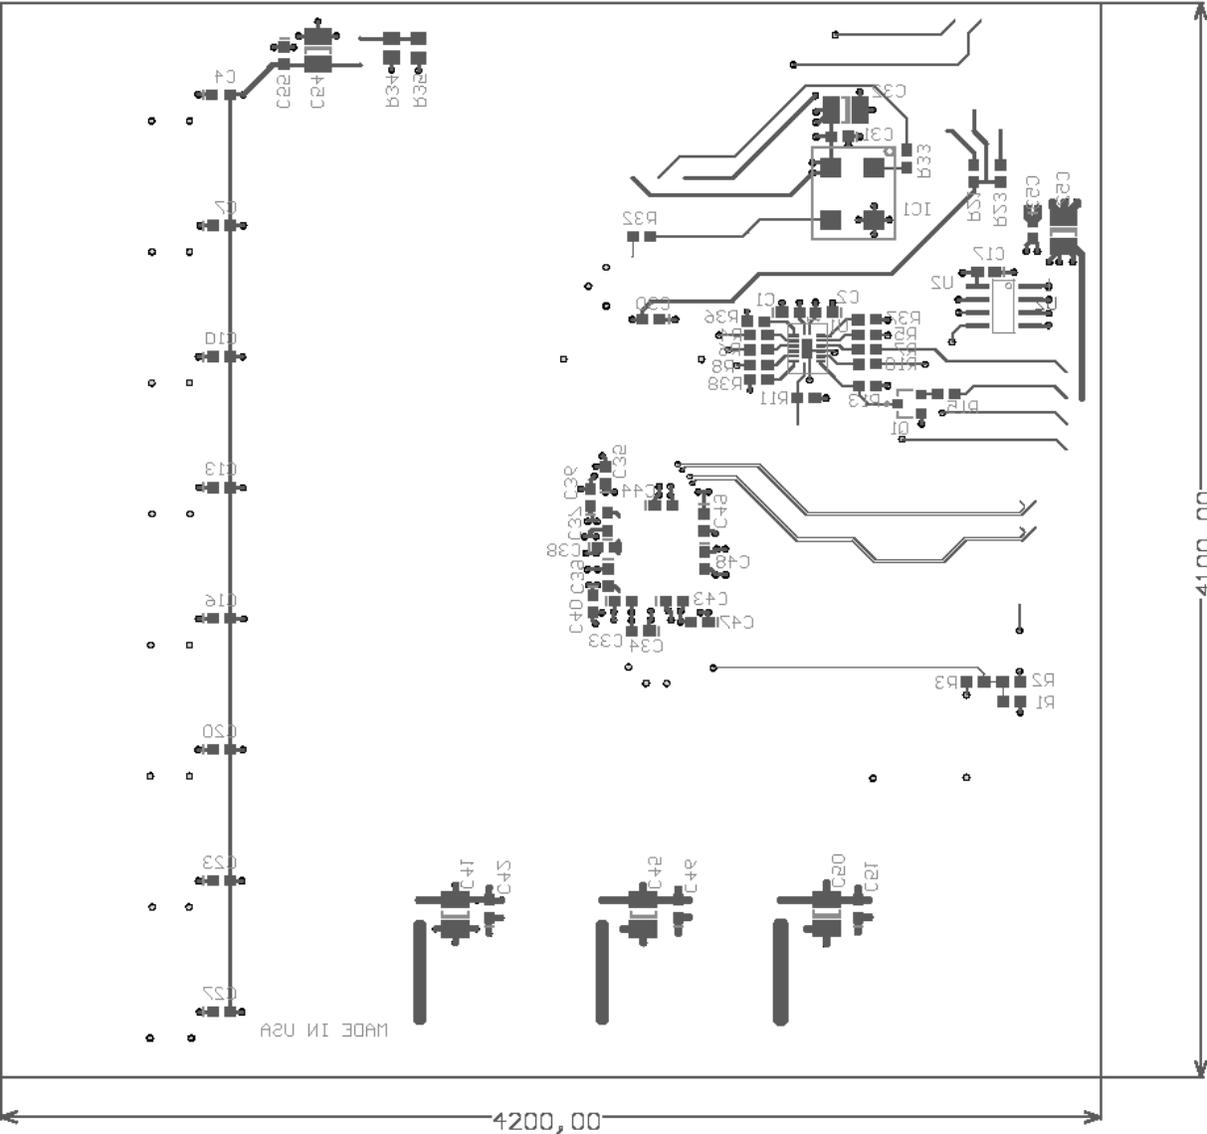

Layer 3 : Internal Power Plane

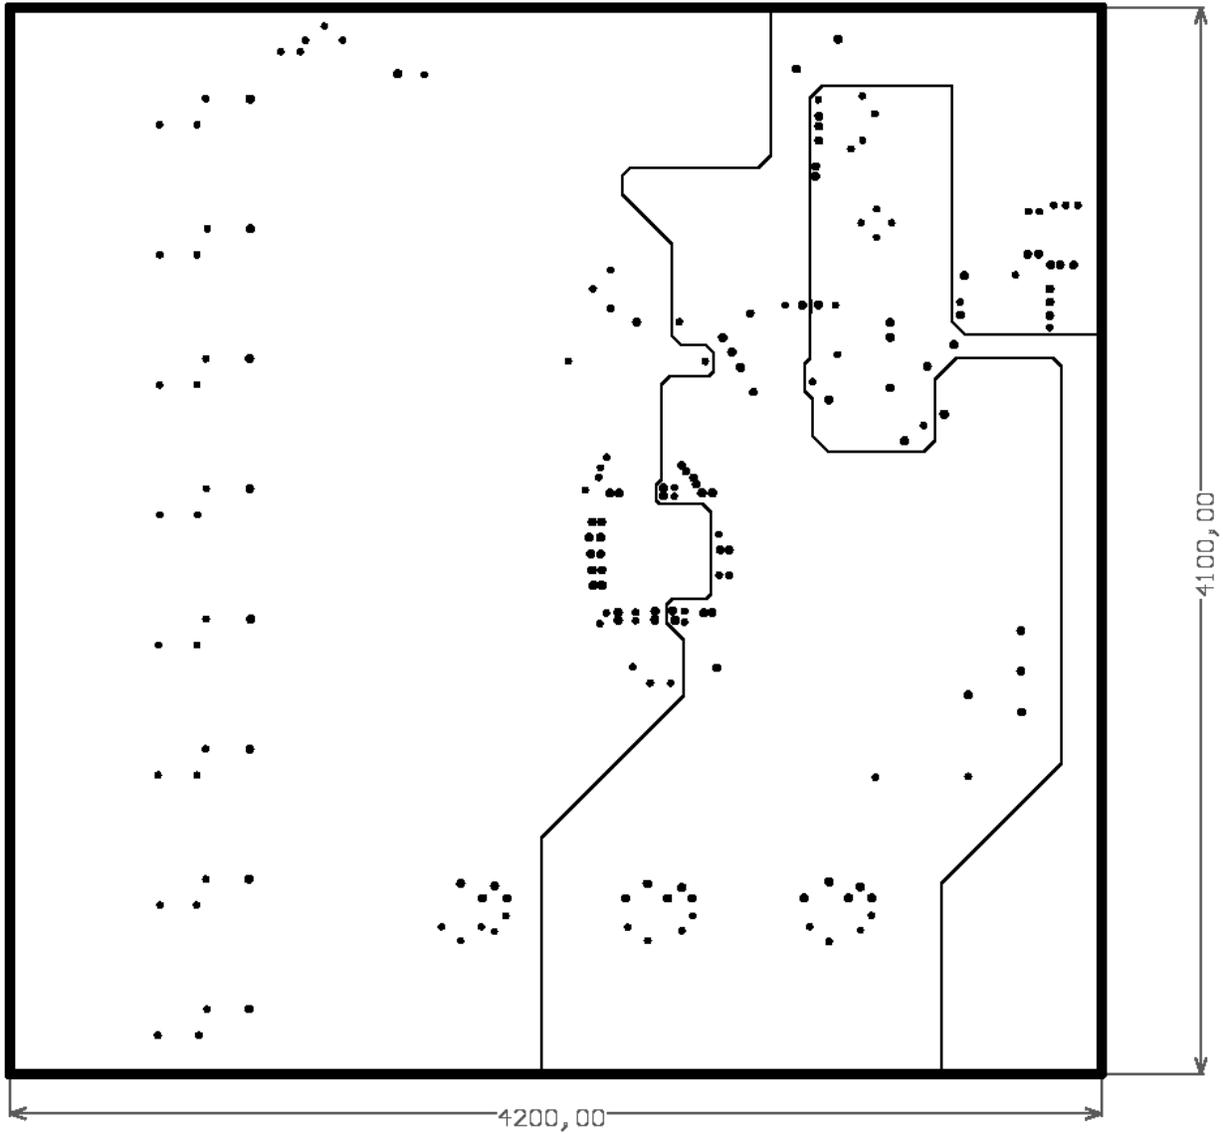

Layer 4 : Bottom

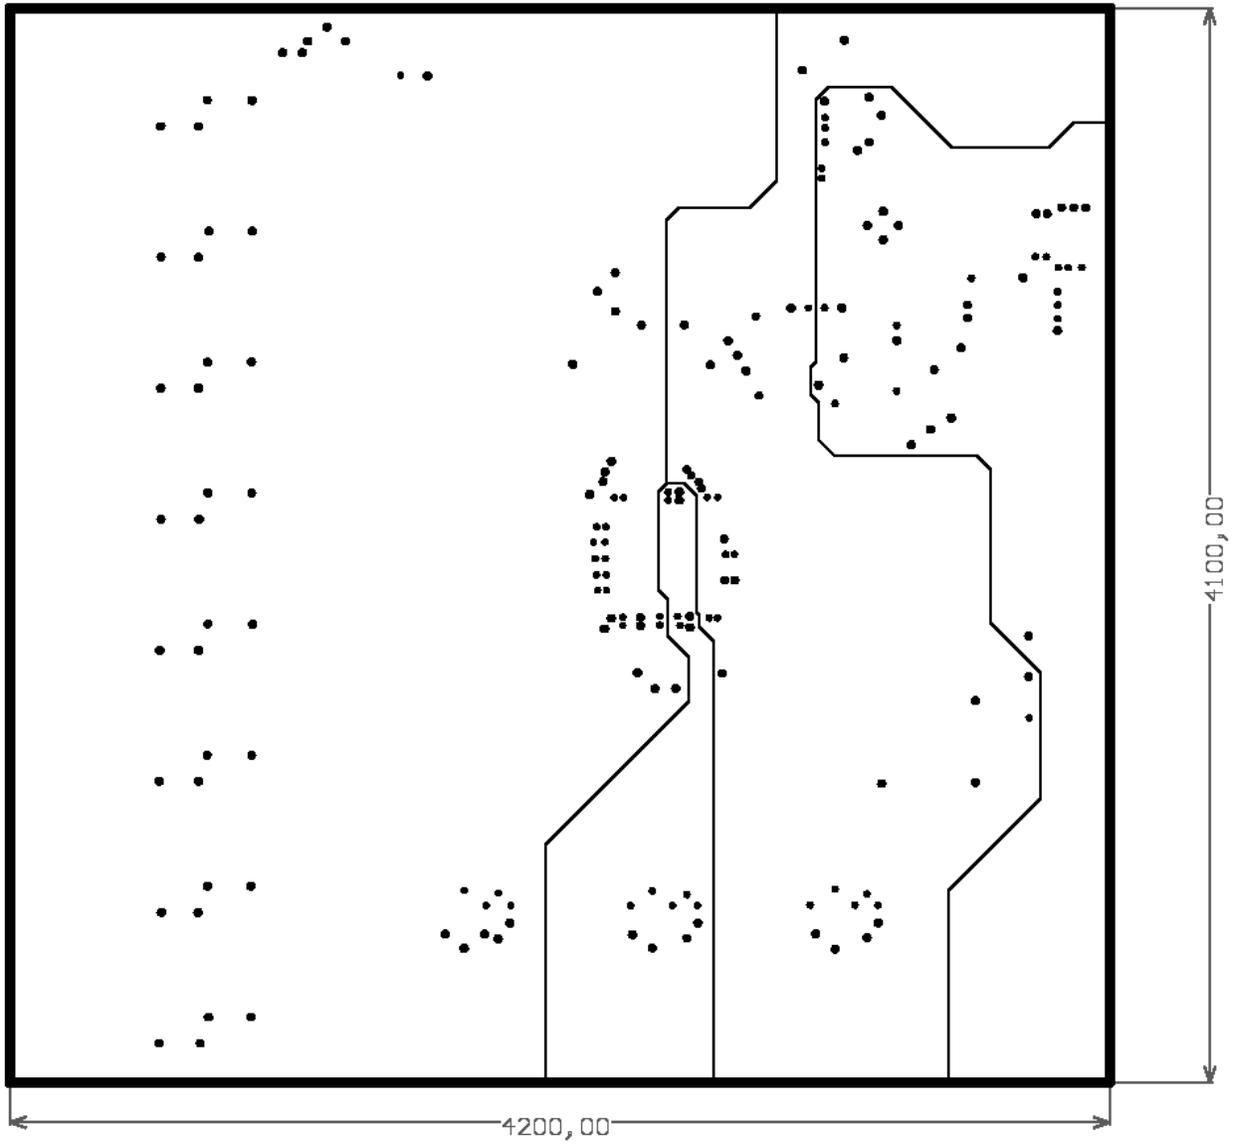

## 9.0 Evaluation Board Bill of Materials

Designator	Footprint	Value	Description	Quantity
*1	QFN10X10-68	ADC12EU050	ADC	1
C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14, C15, C16, C17, C18, C19, C20, C21, C22, C23, C24, C25, C26, C27, C29, C30, C31, C33, C34, C35, C36, C37, C38, C39, C40, C42, C43, C44, C46, C47, C48, C49, C51, C53, C55	CC1608-0603	100nF	Capacitor (Semiconductor SIM Model)	48
C28	CC3216-1206	10uF	Capacitor (Semiconductor SIM Model)	1
C32, C41, C45, C50, C52, C54	CC3225-1210	47uF	Capacitor (Semiconductor SIM Model)	6
IC1	CSX750FJC	Citizen CSX750FJC50.000M-UT	Crystal Oscillator	1
J1	HMZD_2PR_RA_HDR	HMZd – Tyco Electronics part no 6469028-1	HMZd Connector 60 pin	1
P1, P3, P5, P6, P7, P8, P9, P10, P11, P12	SMA		RF Coaxial PCB Connector, MMCX; Thru-Hole, Vertical Mount Plug, 50 Ohm Impedance	10
P2	HDR2X3	Header 2x3	Header, 3-Pin, Dual row	1
P14, P16, P18	LP2	Lumberg KRESS02 Terminal Block	Terminal Block	4
P4, P13, P15, P17, P21	HDR1X2	Header2x1	Jumper Wire	4
Q1	SOT23	BCW66H	NPN General Purpose Transistor	1
R33, R24, R25, R28, R29, R4, R8, R2, R3	CR1608-0603	0	Semiconductor Resistor	9
R15	CR1608-0603	2K	Semiconductor Resistor	1
R13	CR1608-0603	4.7K	Semiconductor Resistor	1
R11, R36, R37, R38, R1, R21, R23	CR1608-0603	10K	Semiconductor Resistor	7
R6	CR1608-0603	33	Semiconductor Resistor	1
R9, R12, R14, R16, R17, R18, R19, R22, R30, R31	CR1608-0603	49.9	Semiconductor Resistor	10
R32, R5, R7, R10	CR1608-0603	100	Semiconductor Resistor	4
R20, R34, R35	CR2012-0805	10K +/- 1%	Semiconductor Resistor	3
R26	CR1005-0402	100	Semiconductor Resistor	1
R27	3296Y	25K	Potentiometer	1
S1	PushButton	OMRON B3S-1000	Push Button	1
S2	DIP-6	Tyco ASE22	Double-Pole, Double-Throw Switch	1
S3	SW-DIP1	EAO part no 09-03290-01	Single Switch	1
T1, T2, T3, T4, T5, T6, T7, T8, T9	ADT1-6T	Mini Circuits ADT1-6T	Transformer	9
U1	DQFN_50M_16_2P5X3P5	FXL4TD245	4-bit level shifter	1
U2	SOIC8_05_WG244_L200	M24C02-WMN6P	EEPROM, STMicroelectronics, M24C02-WMN6P	1

**BY USING THIS PRODUCT, YOU ARE AGREEING TO BE BOUND BY THE TERMS AND CONDITIONS OF NATIONAL SEMICONDUCTOR'S END USER LICENSE AGREEMENT. DO NOT USE THIS PRODUCT UNTIL YOU HAVE READ AND AGREED TO THE TERMS AND CONDITIONS OF THAT AGREEMENT. IF YOU DO NOT AGREE WITH THEM, CONTACT THE VENDOR WITHIN TEN (10) DAYS OF RECEIPT FOR INSTRUCTIONS ON RETURN OF THE UNUSED PRODUCT FOR A REFUND OF THE PURCHASE PRICE PAID, IF ANY.**

The ADC14C105 Evaluation Boards are intended for product evaluation purposes only and are not intended for resale to end consumers, is not authorized for such use and is not designed for compliance with European EMC Directive 89/336/EEC, or for compliance with any other electromagnetic compatibility requirements.

National Semiconductor Corporation does not assume any responsibility for use of any circuitry or software supplied or described. No circuit patent licenses are implied.

#### **LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

---

**National Semiconductor Corporation  
Americas**

Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: support@nsc.com

**National Semiconductor Europe**

Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 699508 6208  
English Tel: +49 (0) 870 24 0 2171  
Français Tel: +49 (0) 141 91 8790

**National Semiconductor  
Asia Pacific Customer**

**Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: sea.support@nsc.com

**National Semiconductor  
Japan Ltd.**

Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507

---

[www.national.com](http://www.national.com)

National does not assume any responsibility for any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated