


HONEYWELL PART NUMBER
111SM2-H2
PRODUCT CODE TYJ0230

REV	DOCUMENT	CHANGED BY	CHECK
8	0038225	PRS 04APR08	BLR

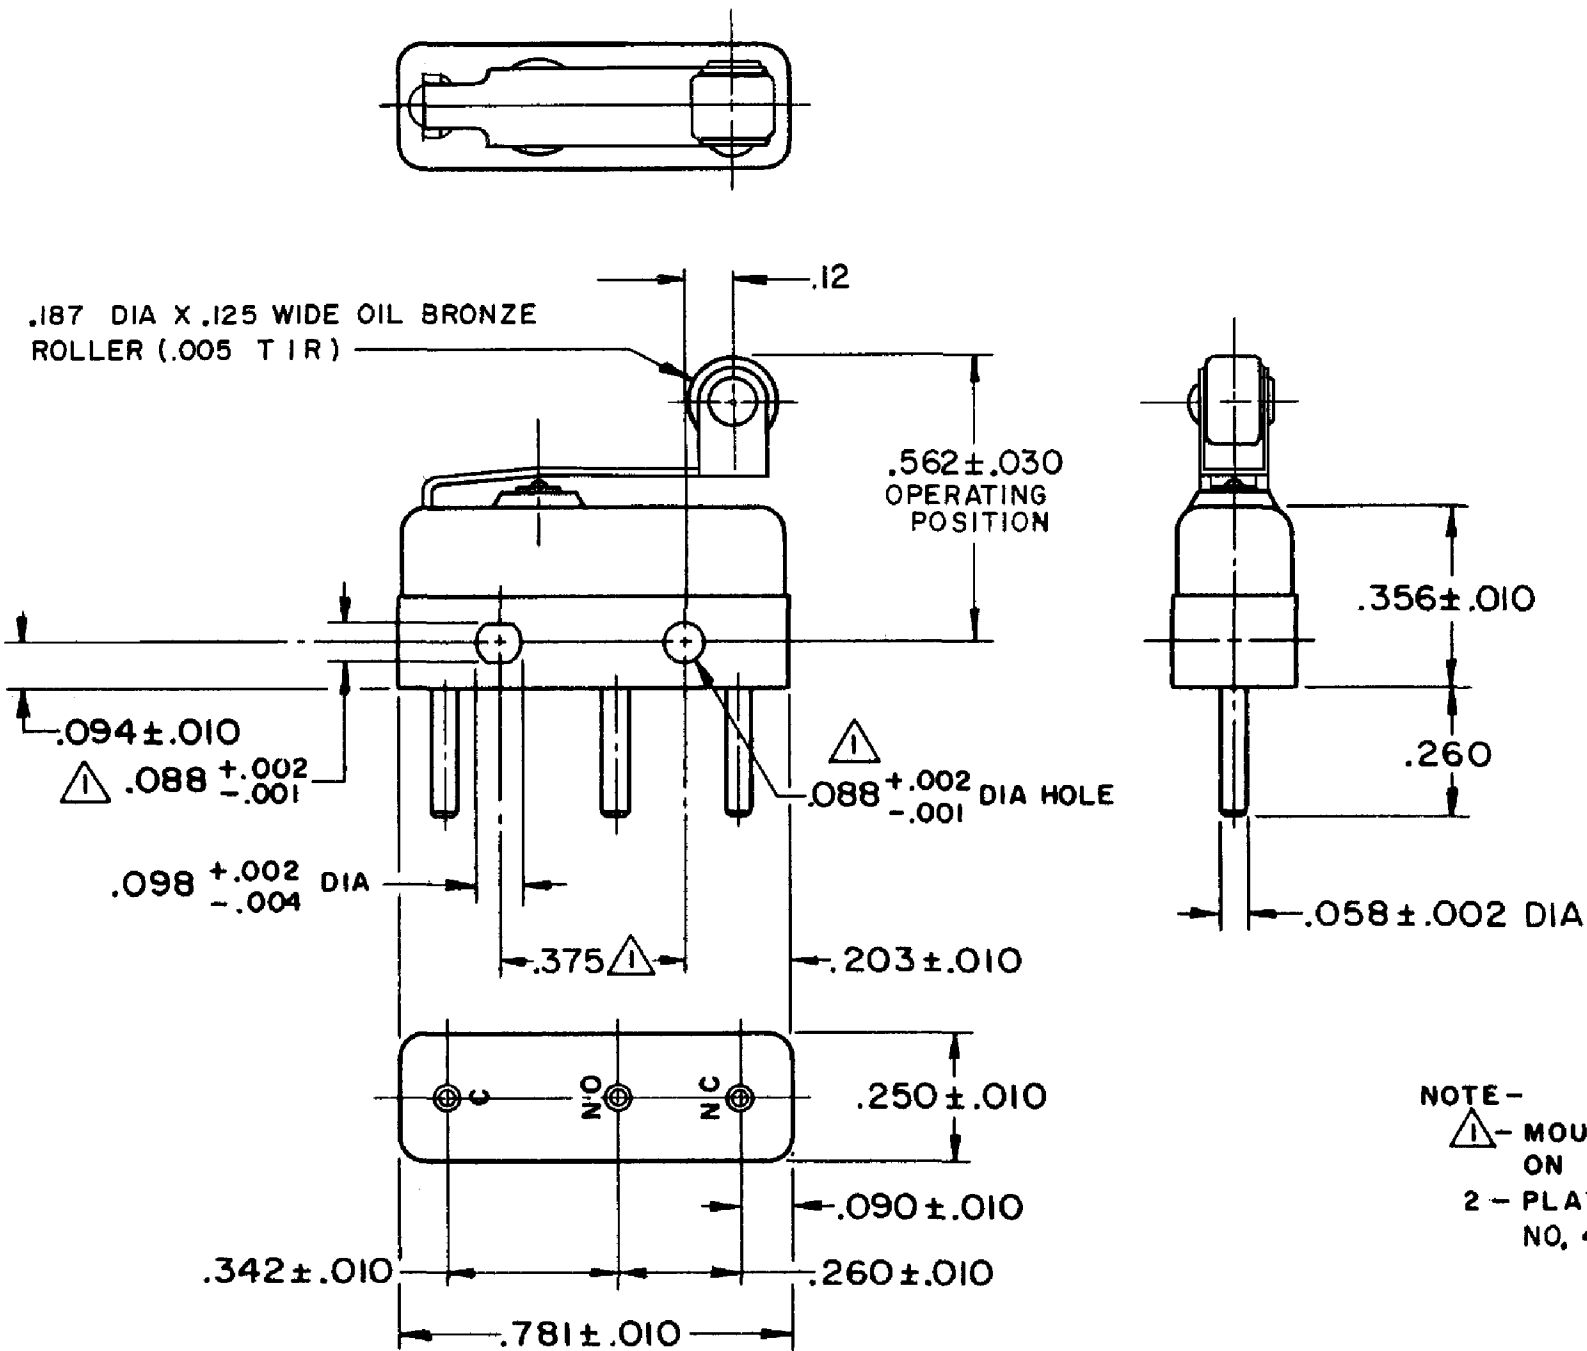

NOTE -
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
2 - PLATED TERMINALS WILL ACCEPT AIRCRAFT MARINE PRODUCTS CO NO, 42429 CONNECTOR

RELEASE NO.	SR - 8748
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -		DRAWN	VK	23 OCT 07	Honeywell				
OPERATING FORCE — — — — 7 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	23 OCT 07					
RELEASE FORCE— — — — 2 OZ MIN		30 VOLTS DC RATING			THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
PRETRAVEL - - - - - .219 MAX		SEA LEVEL 50,000 FT												
DIFFERENTIAL TRAVEL— — — .025 MAX		INDUCTIVE	3 AMP	2.5 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
OVERTRAVEL — — — — — .030 MIN		RESISTIVE	5 AMP	5 AMP			RASTER			B	I	111SM2-H2		8
		MAXIMUM INRUSH 24 AMP								SCALE	-	WEIGHT .008 LB MAX	SHEET	1 OF 1
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4  										
			UL, CSA	5A, 250 VAC ~  		BRAND L4								