


HONEYWELL PART NUMBER
111SM2-T2
PRODUCT CODE TYJ0280

REV	DOCUMENT	CHANGED BY	CHECK
8	0038225	PRS 04APR08	BLR

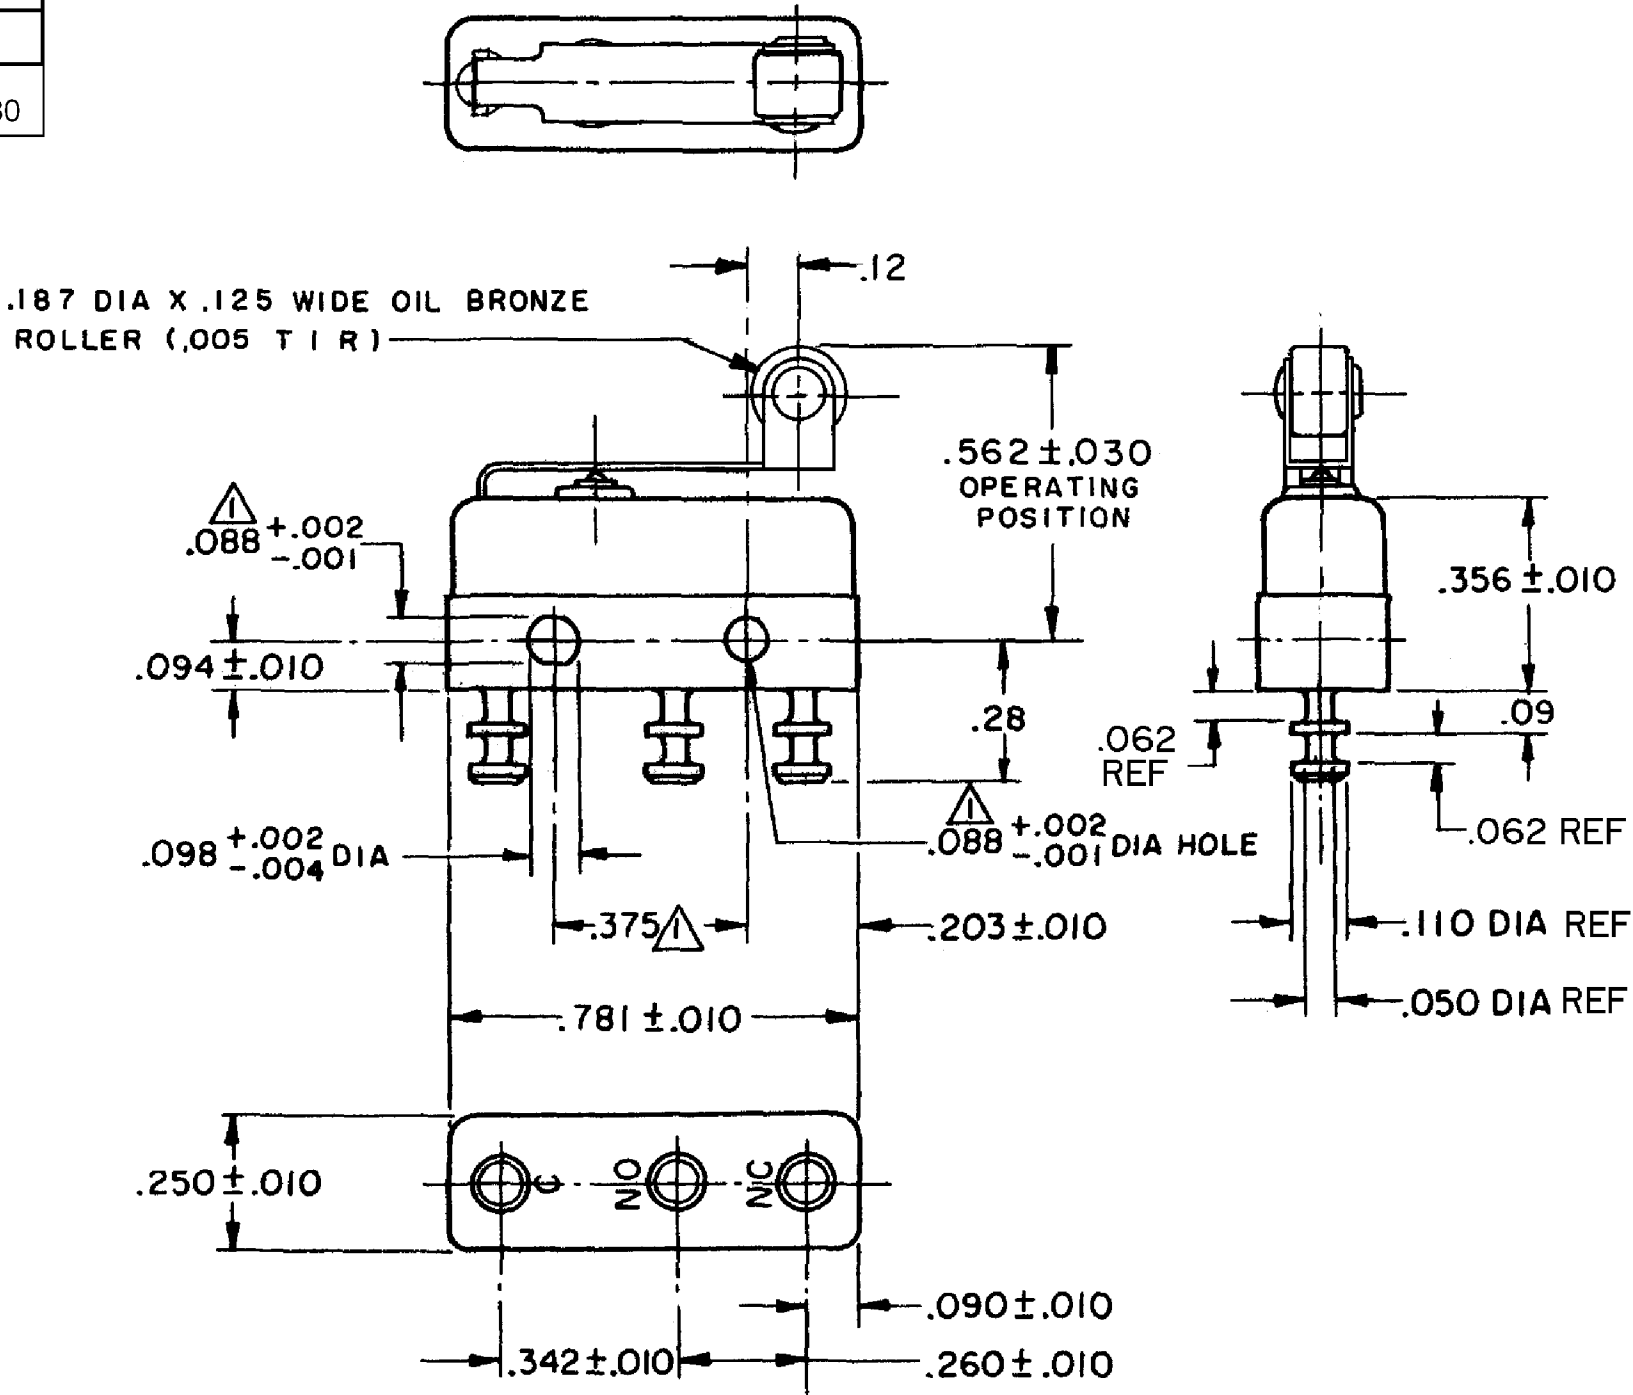

NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	SR - 10729
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -				DRAWN	VK	25 OCT 07		Honeywell				
OPERATING FORCE — — — — 7 OZ MAX		CONTACT ARRANGEMENT SPDT								CHECK	RJ	25 OCT 07						
RELEASE FORCE— — — — — 2 OZ MIN		30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC								
PRETRAVEL - - - - - .219 MAX			SEA LEVEL		50,000 FT													
DIFFERENTIAL TRAVEL— — — .025 MAX		INDUCTIVE	3 AMP	2.5 AMP														
OVERTRAVEL — — — — — .030 MIN		RESISTIVE	5 AMP	5 AMP														
		MAXIMUM INRUSH 24 AMP																
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4			CE	THIRD ANGLE PROJECTION 				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
	UL, CSA	5A, 250 VAC ~								BRAND L4	B	I	111SM2-T2		8			
										RASTER				SCALE	-	WEIGHT .008 LB MAX	SHEET	1 OF 1