


REV	DOCUMENT	CHANGED BY	CHECK
6	0038225	PRS 04APR08	BLR

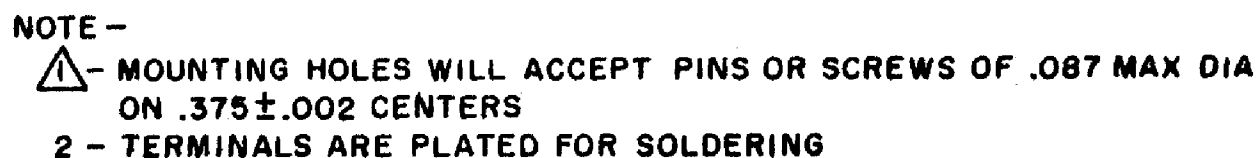

REPLACES

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -		DRAWN	VK	23 OCT 07		Honeywell									
OPERATING FORCE - - - - 7 OZ MAX		CONTACT ARRANGEMENT S P D T					CHECK	RJ	23 OCT 07						TITLE SWITCH - BASIC					
RELEASE FORCE - - - - 2 OZ MIN		30 VOLTS DC RATING			THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				SIZE B								TYPE I	
PRETRAVEL - - - - - .219 MAX		SEA LEVEL 50,000 FT																		
DIFFERENTIAL TRAVEL - - - .025 MAX		INDUCTIVE 3 AMP 2.5 AMP																		
OVERTRAVEL - - - - - .030 MIN		RESISTIVE 5 AMP 5 AMP					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SCALE -		WEIGHT .008 LB MAX		SHEET 1 OF 1					
APPROVALS		MAXIMUM INRUSH 24 AMP																		
		KEMA, CE 5A, 250V ~ T85 1E4  																		
		UL, CSA 5A, 250 VAC ~   BRAND L4																		