

HONEYWELL PART NUMBER
111SM23-T
PRODUCT CODE TYJ2360

REV	DOCUMENT	CHANGED BY	CHECK
7	0038225	PRS 04APR08	BLR

B


A

A

B

A


.187 DIA X .125 WIDE OIL BRONZE
ROLLER. (.005 T. I. R.)

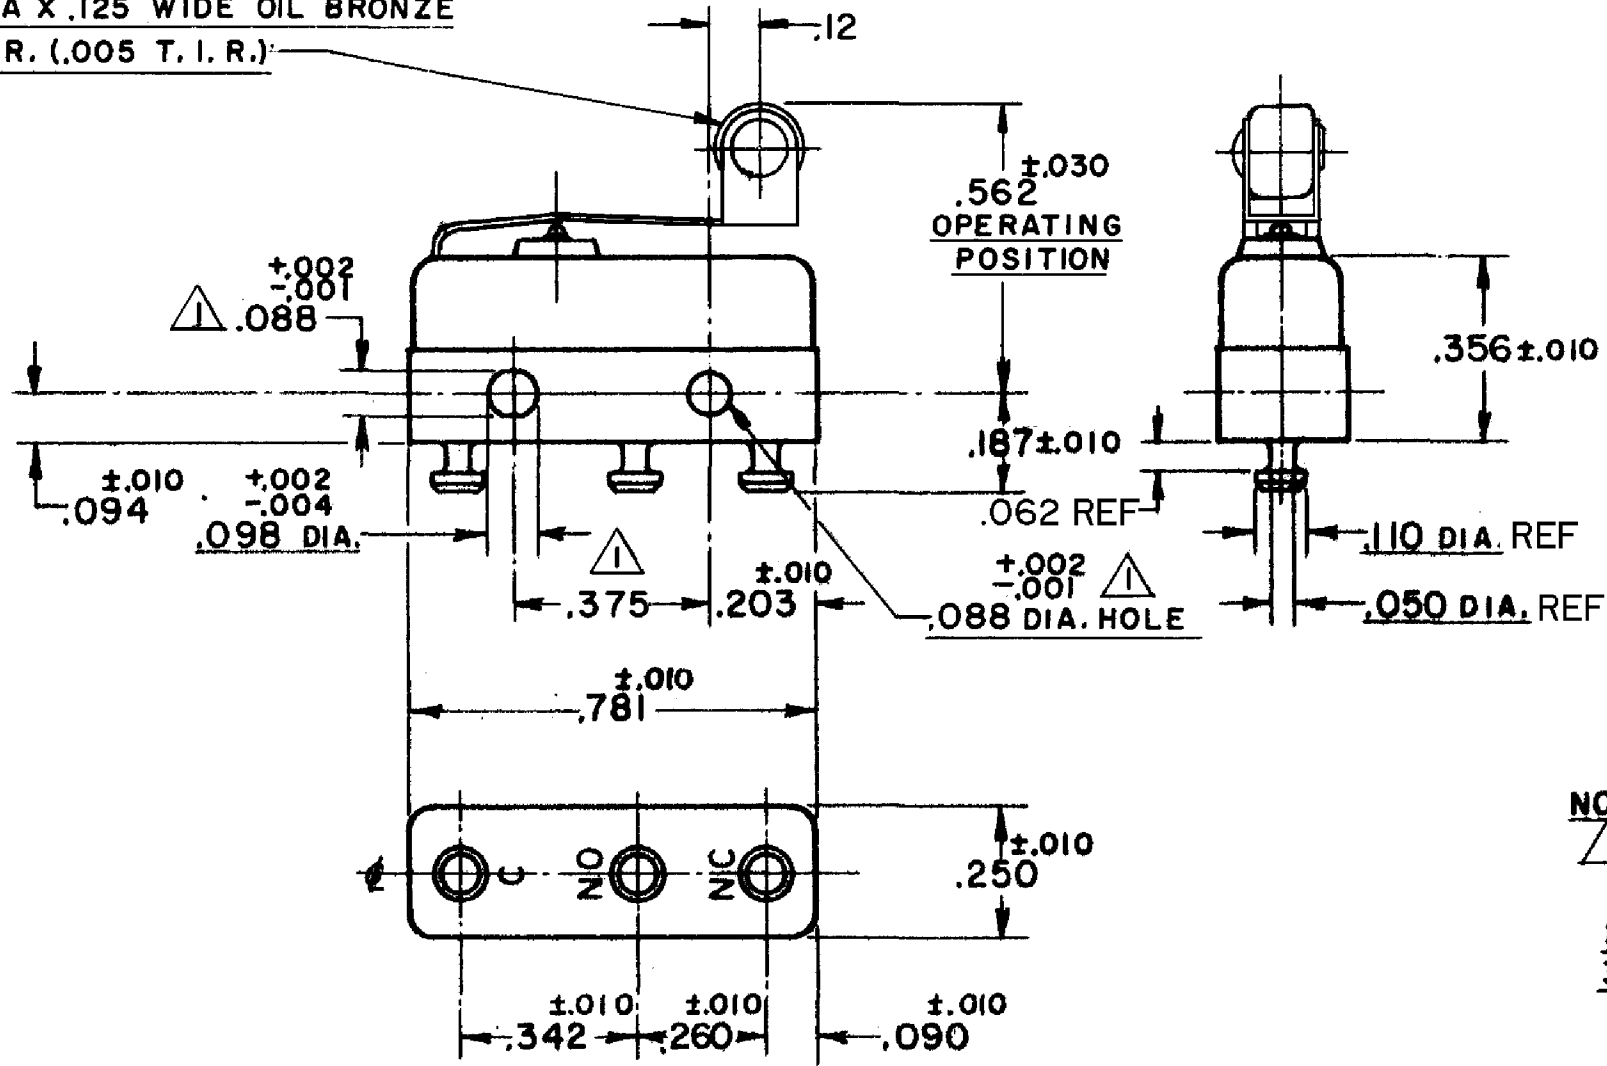

NOTE -
1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX. DIA. ON .375 ±.002 CENTERS.
2- TERMINALS ARE PLATED FOR SOLDERING.
3- MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO. SR - 8330

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -		DRAWN VK 26 OCT 07		Honeywell			
OPERATING FORCE — — — — 7 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK RJ 26 OCT 07					
RELEASE FORCE— — — — 2 OZ MIN		30 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC					
PRETRAVEL - - - - - .219 MAX			SEA LEVEL	50,000 FT								
DIFFERENTIAL TRAVEL— — — .025 MAX		INDUCTIVE		1/2 AMP			1/2 AMP					
OVERTRAVEL — — — — — .030 MIN		RESISTIVE		1 AMP			1 AMP					
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE B	TYPE I	DRAWING NAME 111SM23-T	REV 7
		APPROVALS KEMA, CE UL, CSA	1A, 250V ~ T85 1E4 1A, 125 VAC ~	   BRAND L 22			RASTER		SCALE -	WEIGHT .008 LB MAX	SHEET 1 OF 1	