


REV	DOCUMENT	CHANGED BY	CHECK
10	0039671	KVB 08MAY08	BLR

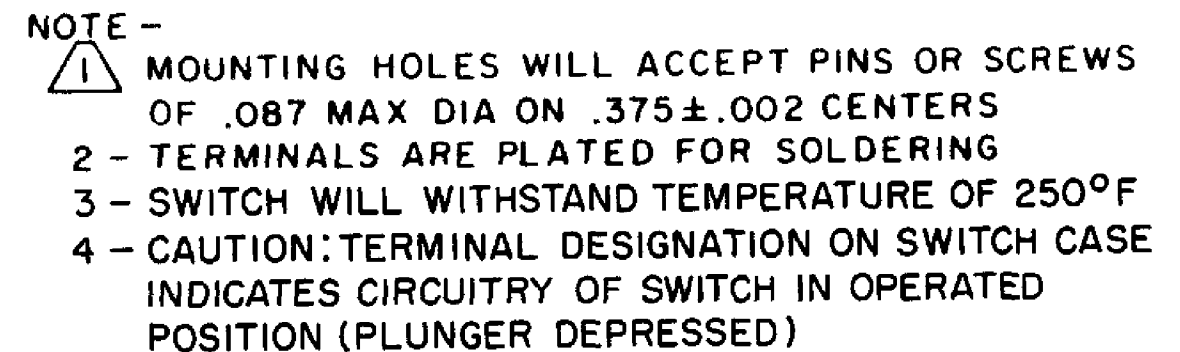

RELEASE NO.	PR - 1964
REPLACES	-

CHARACTERISTICS At point A		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	29OCT 07		Honeywell				
OPERATING FORCE – – – – 6 OZ MAX		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	29OCT 07						
RELEASE FORCE– – – – 1 OZ MIN		30 VOLTS DC RATING				NO PLACE X ± -				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
PRETRAVEL - - - - - .100 MAX		SEA LEVEL 50,000 FT				ONE PLACE .X ± 0.030												
DIFFERENTIAL TRAVEL– – – .020 MAX		INDUCTIVE 3 AMP 2.5 AMP				TWO PLACE .XX ± 0.015												
OVERTRAVEL – – – – - .030 MIN		RESISTIVE 5 AMP 5 AMP				THREE PLACE .XXX ± 0.005				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
RELEASE TRAVEL – – – – - .020 MIN		MAXIMUM INRUSH 24 AMP				FOUR PLACE .XXXX ± -								B	I	111SM305-T2		10
APPROVALS		KEMA, CE 5A, 250V ~ T85 1E4 				THIRD ANGLE PROJECTION				RASTER				SCALE	-	WEIGHT .008 LB MAX	SHEET	1 OF 1
		UL, CSA 5A, 250 VAC   BRAND L4																