
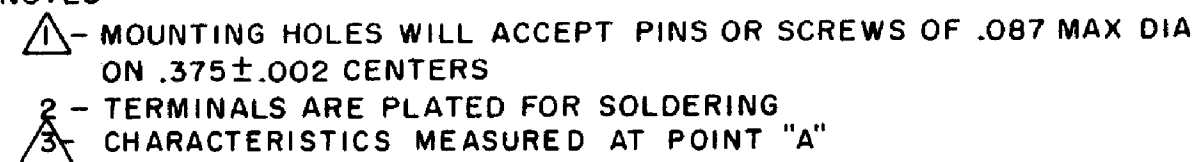


REV	DOCUMENT	CHANGED BY	CHECK
9	0039671	KVB 08MAY08	BLR



RELEASE NO.	PR - 675
REPLACES	-

CHARACTERISTICS 		ELECTRICAL DATA			DESIGN UNITS: INCH			DRAWN	VK	26 OCT 07		Honeywell				
OPERATING FORCE – – 2 1/2 -3 3/4 OZ		CONTACT ARRANGEMENT S P D T			TOLERANCES UNLESS NOTED:			CHECK	RJ	26 OCT 07						
RELEASE FORCE– – – – 1/4 OZ MIN		30 VOLTS DC RATING			NO PLACE X ± -			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
		SEA LEVEL 50,000 FT			ONE PLACE .X ± 0.030											
DIFFERENTIAL TRAVEL– – – .020 MAX		INDUCTIVE 3 AMP 2.5 AMP			TWO PLACE .XX ± 0.015											
OVERTRAVEL – – – – – .030 MIN		RESISTIVE 5 AMP 5 AMP			THREE PLACE .XXX ± 0.005			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
		MAXIMUM INRUSH 24 AMP			FOUR PLACE .XXXX ± -							B	I	111SM47-T2		9
		APPROVALS KEMA, CE 5A, 250V ~ T85 1E4   UL, CSA 5A, 250 VAC   BRAND L4			THIRD ANGLE PROJECTION 			RASTER				SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1		