
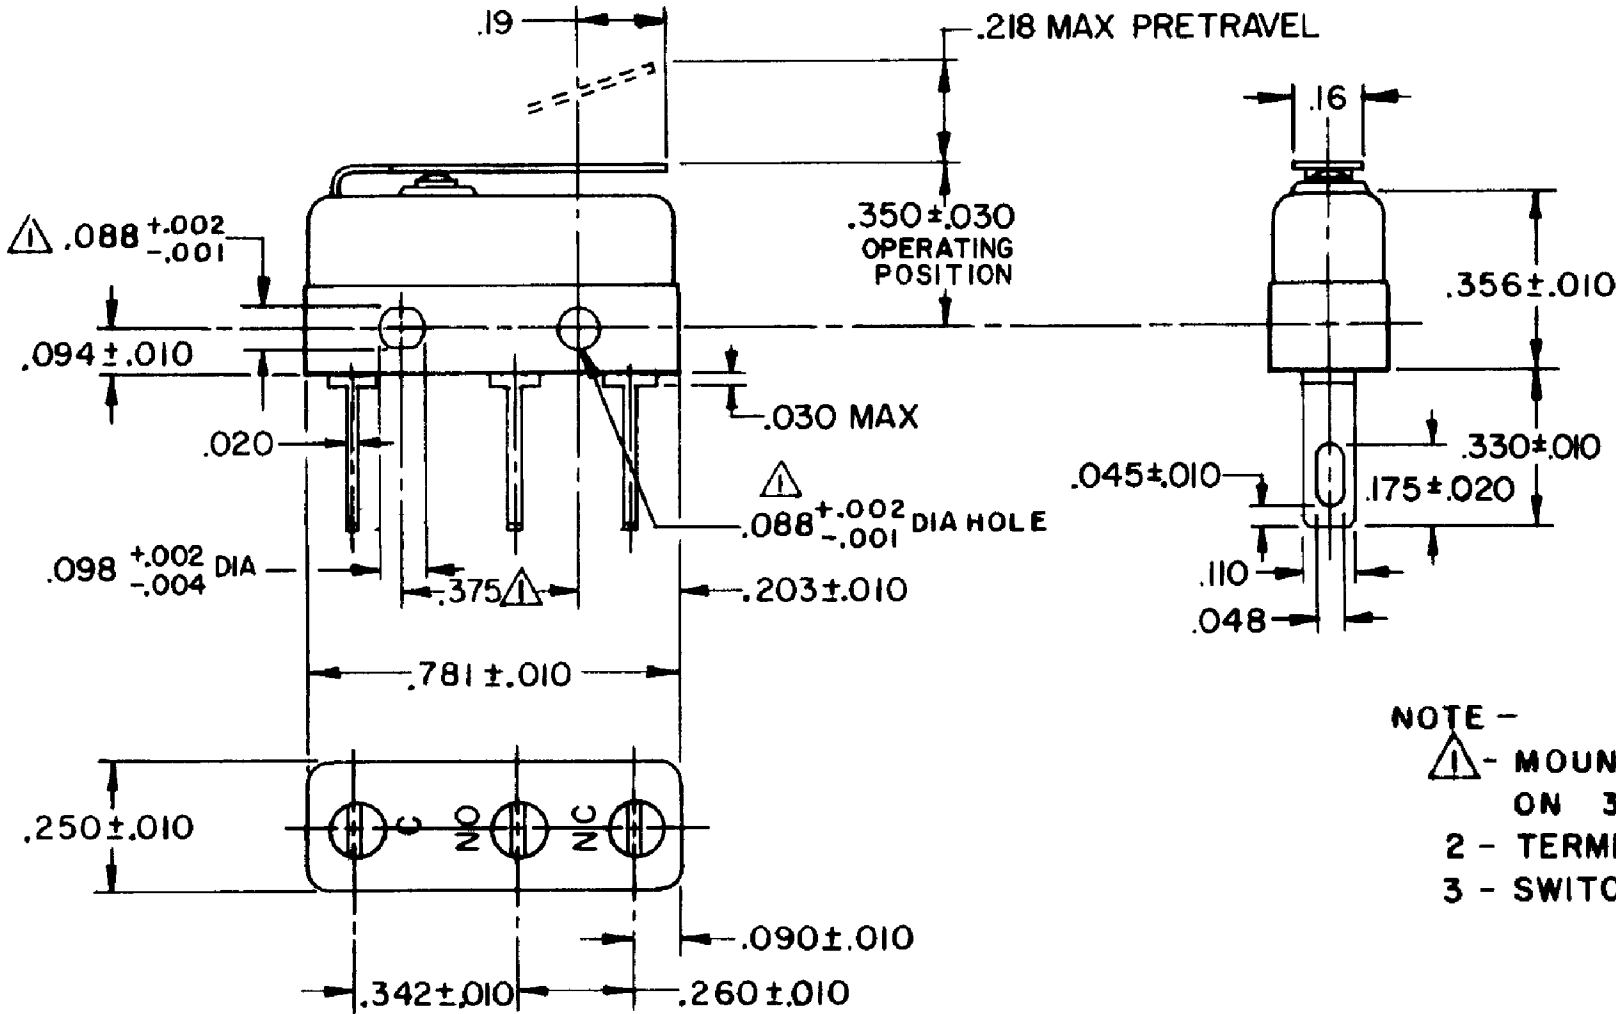


HONEYWELL
PART NUMBER
111SM601-H4
PRODUCT CODE
TYJ9020

REV	DOCUMENT	CHANGED BY	CHECK
11	0038225	PRS 04APR08	BLR

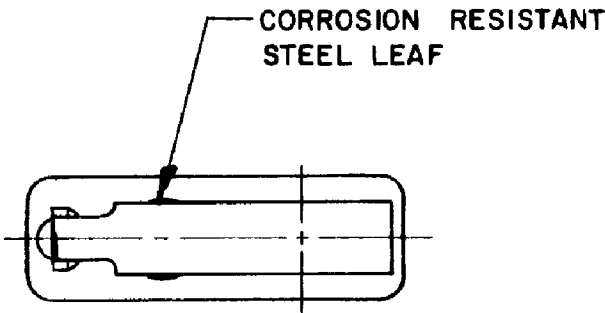

NOTE -
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250 ° F

RELEASE NO. PR - 7970
REPLACES -

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± - THIRD ANGLE PROJECTION 	DRAWN	VK	29 OCT 07	Honeywell							
OPERATING FORCE — — — 7 OZ MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	29 OCT 07				TITLE SWITCH - BASIC				
RELEASE FORCE— — — — 2 OZ MIN	30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SIZE B						TYPE I	DRAWING NAME 111SM601-H4
DIFFERENTIAL TRAVEL— — — .030 MAX		SEA LEVEL	50,000 FT								INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				
OVERTRAVEL — — — — — .030 MIN	INDUCTIVE	3 AMP	2.5 AMP	MAXIMUM INRUSH 24 AMP			REVISIONS								
	RESISTIVE	5 AMP	5 AMP							APPROVALS			KEMA, CE 5A, 250V ~ T85 1E4    UL, CSA 5A, 250 VAC   BRAND L4		