

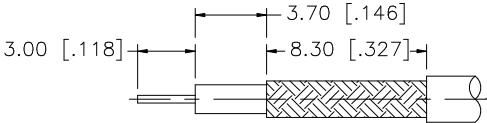
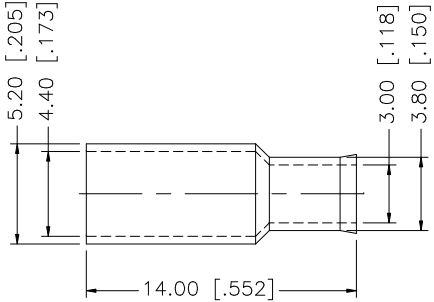



REV.	DATE	DESCRIPTION
A	02/28/02	MODIFY CONTACT PIN AND BODY LENGTH
B	04/04/03	UPDATE DRAWING FORMAT

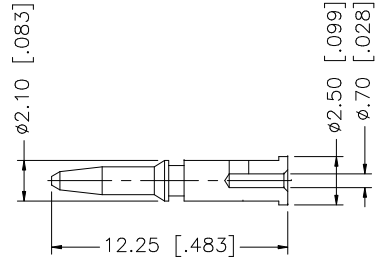

RECOMMENDED
CABLE STRIPPING DIM'S

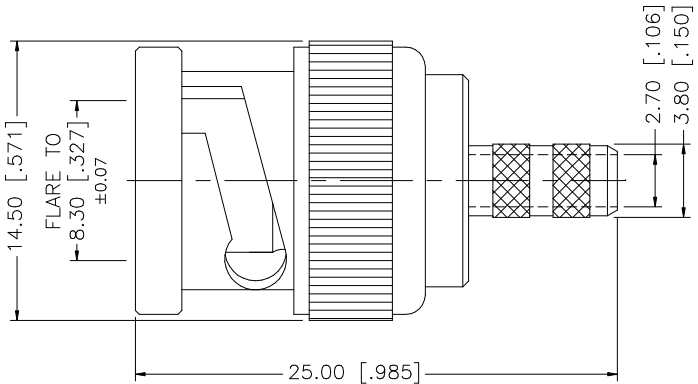

- CRIMP NOTES:
- 1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 - 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
7						DRAWN	G.R.S.						04/04/03		
6						CHECKED									
5	FERRULE	COPPER	NICKEL	1					PART DESCRIPTION						
4	SLEEVE	DELRIN	NATURAL	1					BNC CRIMP PLUG – 50 ohms (RG 174/U, 188/U, 316/U CABLE)						
3	CONTACT PIN	BRASS	GOLD	1					PART NO.						
2	INSULATOR	DELRIN	NATURAL	1					112134						
1	SHELL/BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/112/112134.DWG	DWG. NO.	112134.DWG	REV.	B	SIZE	A	SCALE	NA