
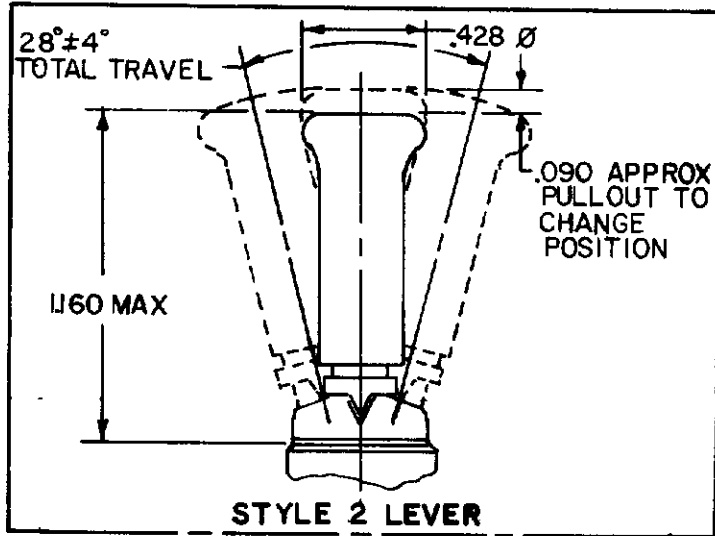
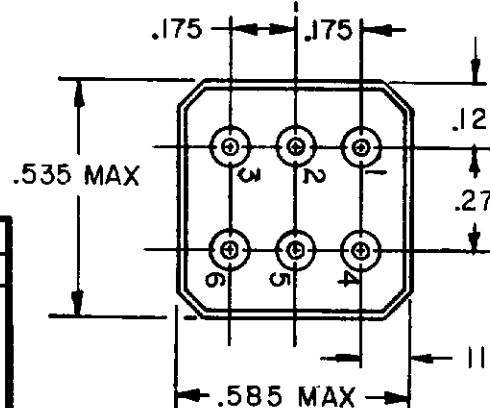


MICRO SWITCH
FREDERICKT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
112TW1-10 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

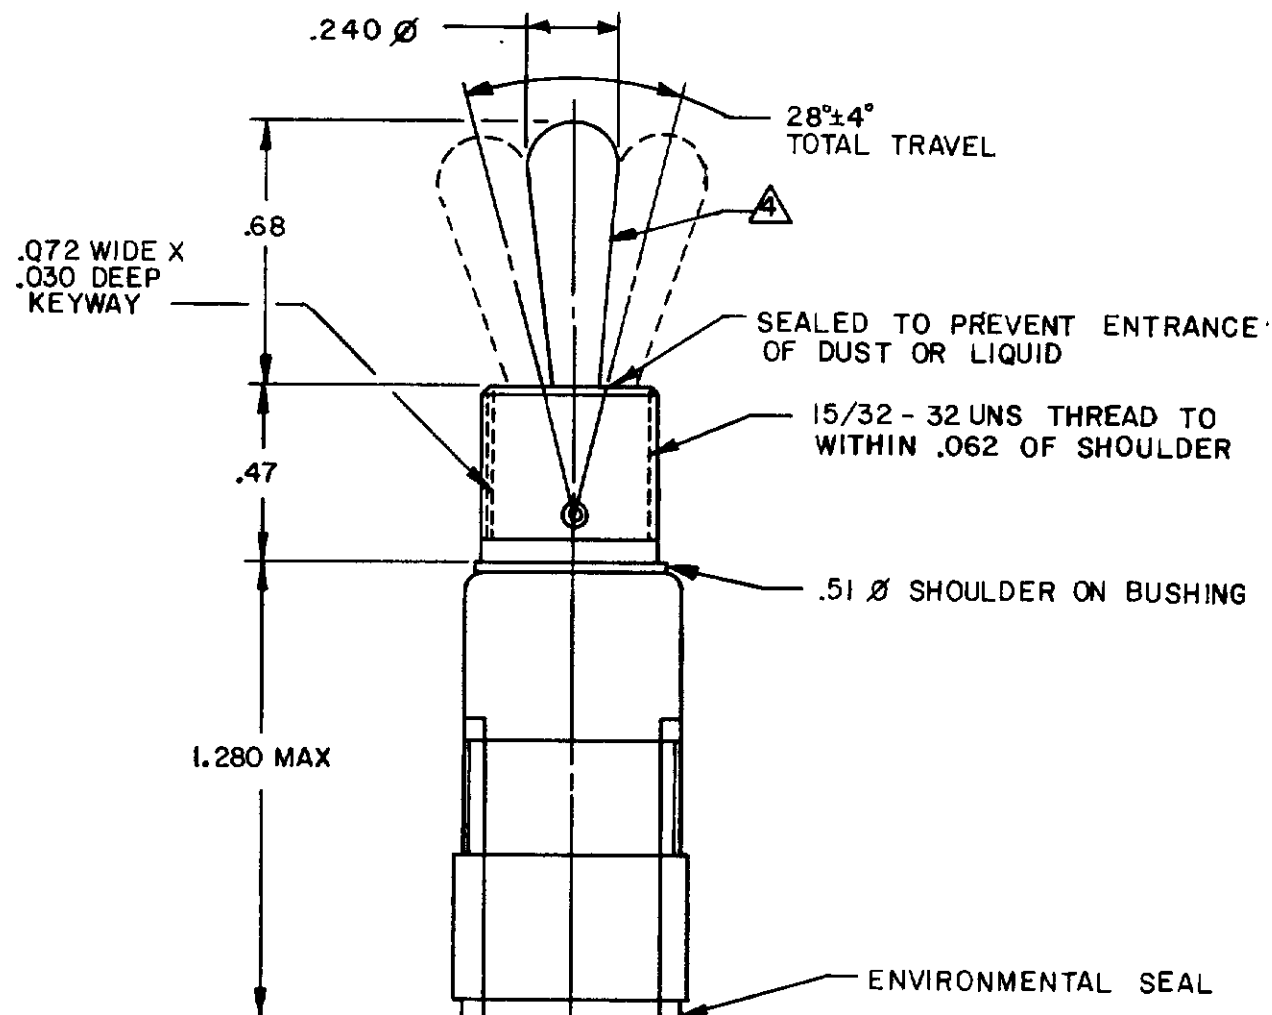

CATALOG LISTING		AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	STYLE NUMBER	ELECTRICAL DATA		
112TWI-10		NONE	1	28 VDC & 125 VAC 5 AMP RES 2 AMP IND 1 AMP LAMP		
112TWI-10		A,B,D,E,F,G,H,J,K,L,M,N,P	2			
"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION	"F" LOCKED IN EXTREME POSITION (KEYWAY SIDE)	 1	
"G" LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"J" LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"K" LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"L" LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)		
"M" LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)	"N" LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)				
CIRCUIT MADE WITH TOGGLE LEVER IN						 1
KEYWAY SIDE		CENTER		OPPOSITE KEYWAY		
MAINTAINED POSITION		MAINTAINED POSITION		MAINTAINED POSITION		 1 3

- NOTES**
- 1 - FURNISHED UNASSEMBLED
 - 2 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101
 - 3 - SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING
 - 4 - MATTE FINISH
 - 5 - SWITCH DESIGNED TO CONFORM TO MS27721 EXCEPT TERMINATION LENGTH AND WEIGHT

SCALE 2:1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE
ONE PLACE (.0) .030
TWO PLACE (.00) .015
THREE PLACE (.000) .005
ANGLES .005
WEIGHT