

MICRO SWITCH

FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
112TW1-70 SERIES

CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

112TW1-70 SERIES
CHART 1

DRAWING
NUMBER

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

ISSUE
X 7

REPLACES

RELEASE NO. PR-7564

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

SCALE 2:1

DO NOT SCALE PRINT

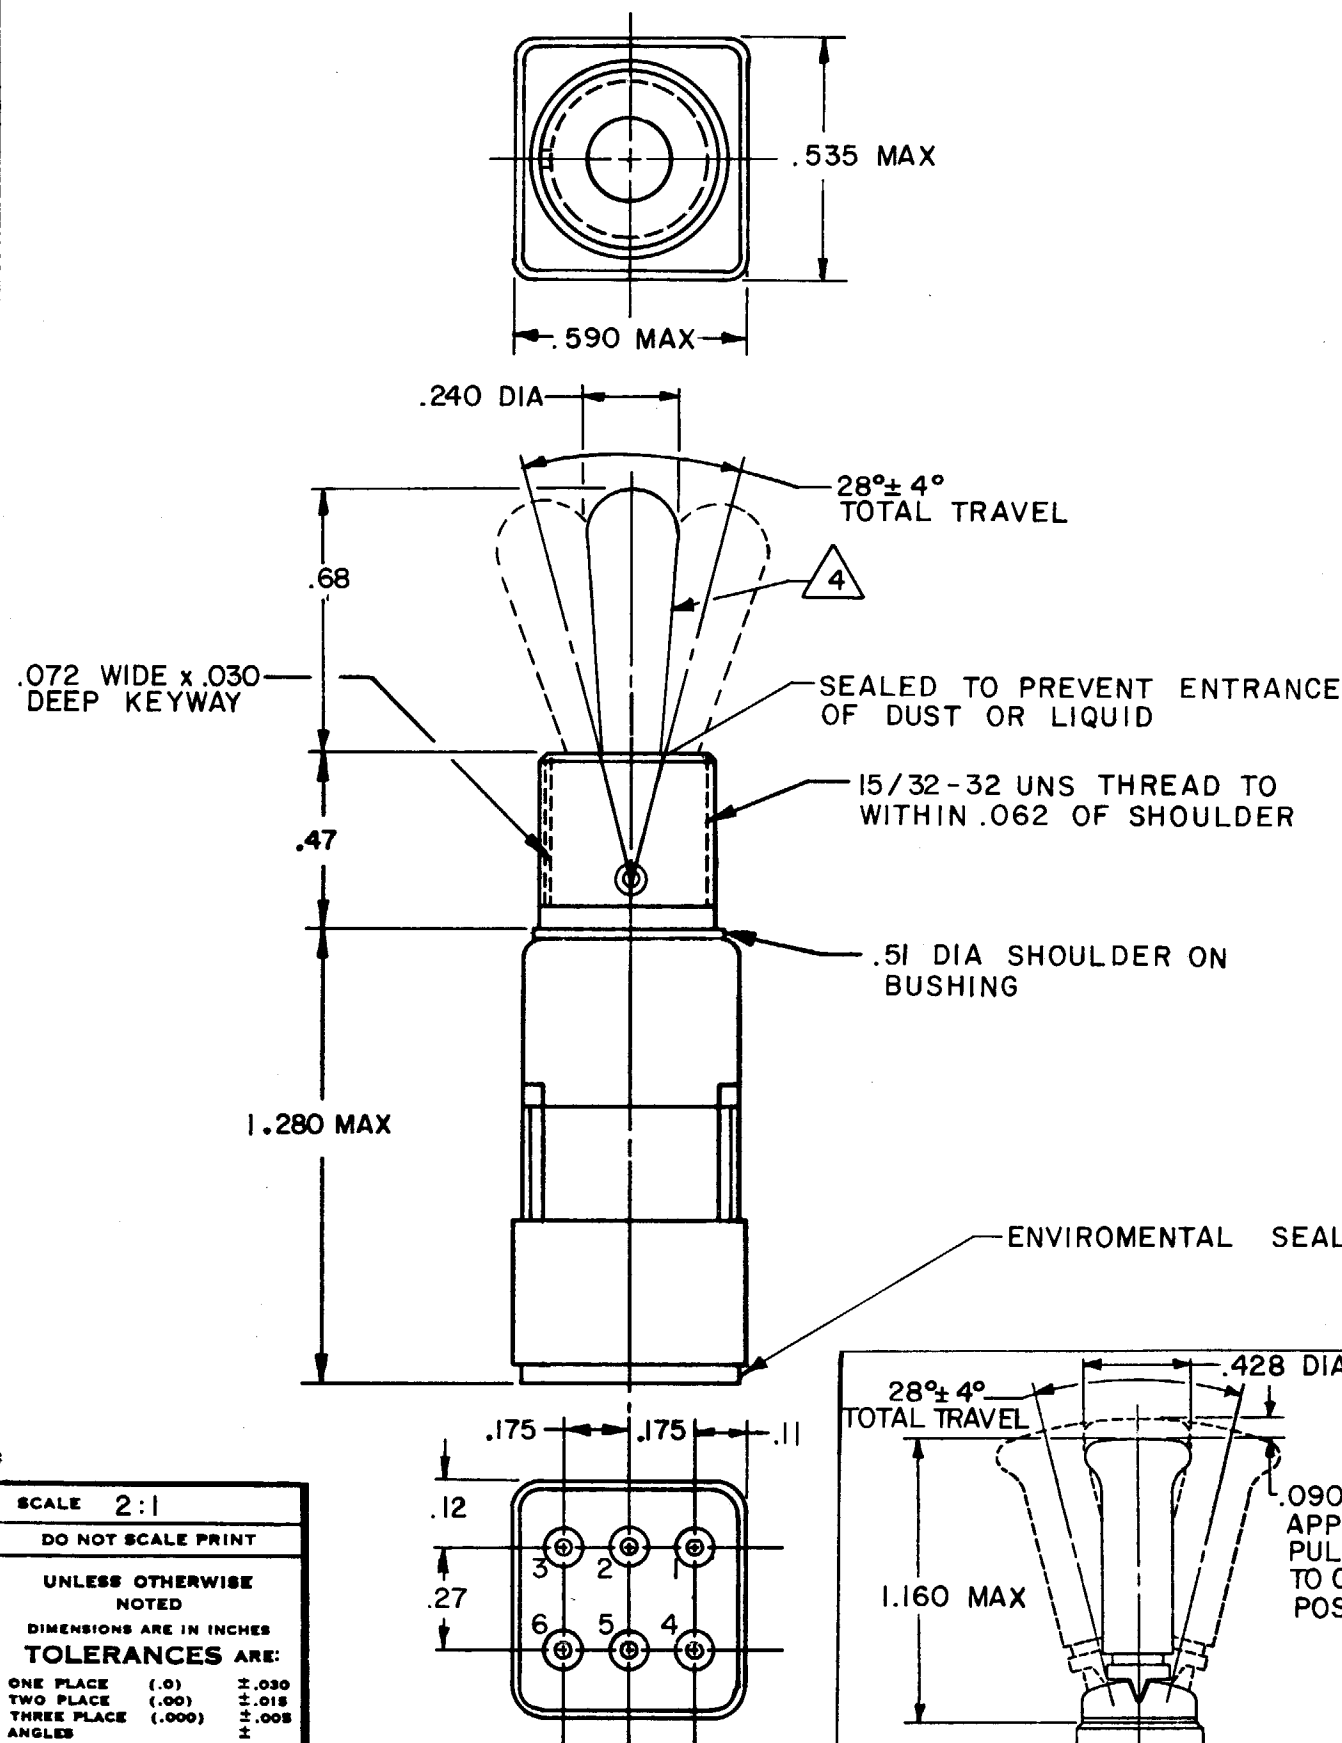
UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES






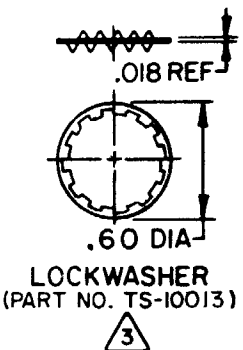







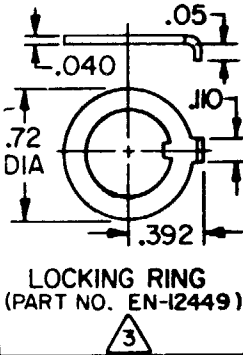




TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

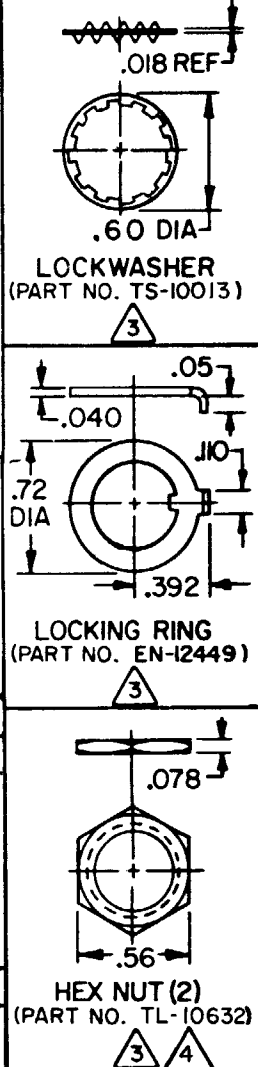


STYLE 2 LEVER

CATALOG LISTING		AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	STYLE NUMBER	ELECTRICAL DATA		
				28 VDC & 125 VAC 5 AMP RES 2 AMP IND 1 AMP LAMP		
112 TW-70			1			
112 TW-70		E, L, N	2			
"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)		
"G"  LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H"  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L"  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)		
"M"  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N"  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P"  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)				
CIRCUIT MADE WITH TOGGLE LEVER IN						
KEYWAY SIDE		CENTER		OPPOSITE KEYWAY		
						
MOMENTARY POSITION		MAINTAINED POSITION		MOMENTARY POSITION		

NOTES

- 1 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101
- 2 - SWITCH DESIGNED TO CONFORM TO MS 277 021 EXCEPT TERMINATION LENGTH AND WEIGHT
- 3 - FURNISHED UNASSEMBLED
- 4 - MATTE FINISH
- 5 - SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING



MICRO SWITCH

FREEDPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
112TW1-70 SERIES

CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

112TW1-70 SERIES
CHART 1

M

DRAWING
NUMBER

7

ISSUE

3

REPLACES

PR-7564

CHECK

CHECK

78

21 DEC 78

78

78

78

78

78

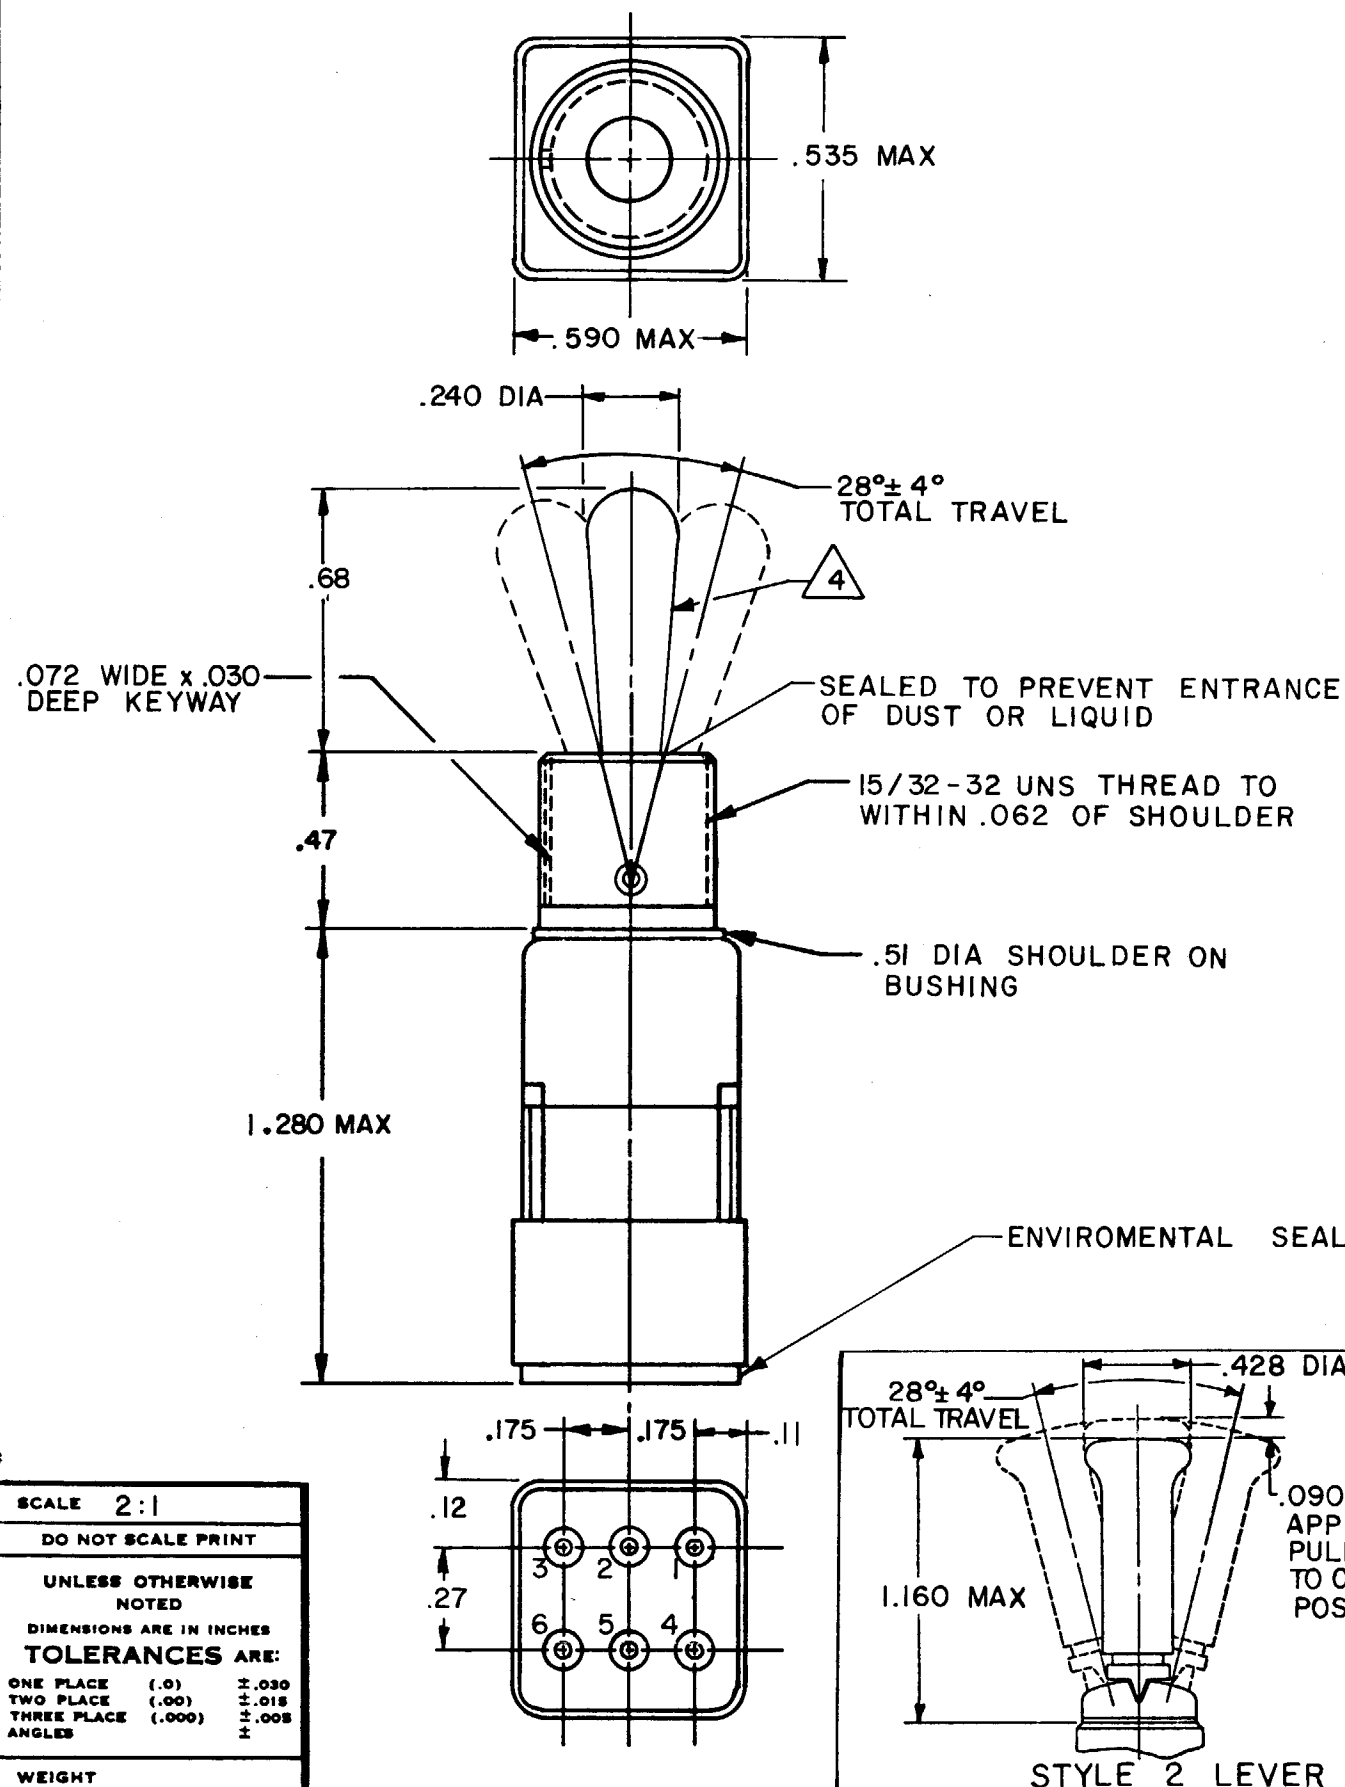
78


















78

78

78

SCALE 2:1		
DO NOT SCALE PRINT		
UNLESS OTHERWISE NOTED		
DIMENSIONS ARE IN INCHES		
TOLERANCES ARE:		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT		



CATALOG LISTING		AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS		ELECTRICAL DATA		
				28 VDC & 125 VAC		
				5 AMP RES		
				2 AMP IND		
				1 AMP LAMP		
112 TW-70				1		
112 TW-70		E, L, N		2		
"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	 LOCKWASHER (PART NO. TS-10013)	
"G"  LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H"  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L"  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)		 LOCKING RING (PART NO. EN-12449)
"M"  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N"  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P"  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)				
CIRCUIT MADE WITH TOGGLE LEVER IN						
KEYWAY SIDE		CENTER		OPPOSITE KEYWAY		
						
MOMENTARY POSITION		MAINTAINED POSITION		MOMENTARY POSITION		
 HEX NUT (2) (PART NO. TL-10632)						

NOTES

- 1 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101
- 2 - SWITCH DESIGNED TO CONFORM TO MS 277 021 EXCEPT TERMINATION LENGTH AND WEIGHT
- 3 - FURNISHED UNASSEMBLED
- 4 - MATTE FINISH
- 5 - SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING