
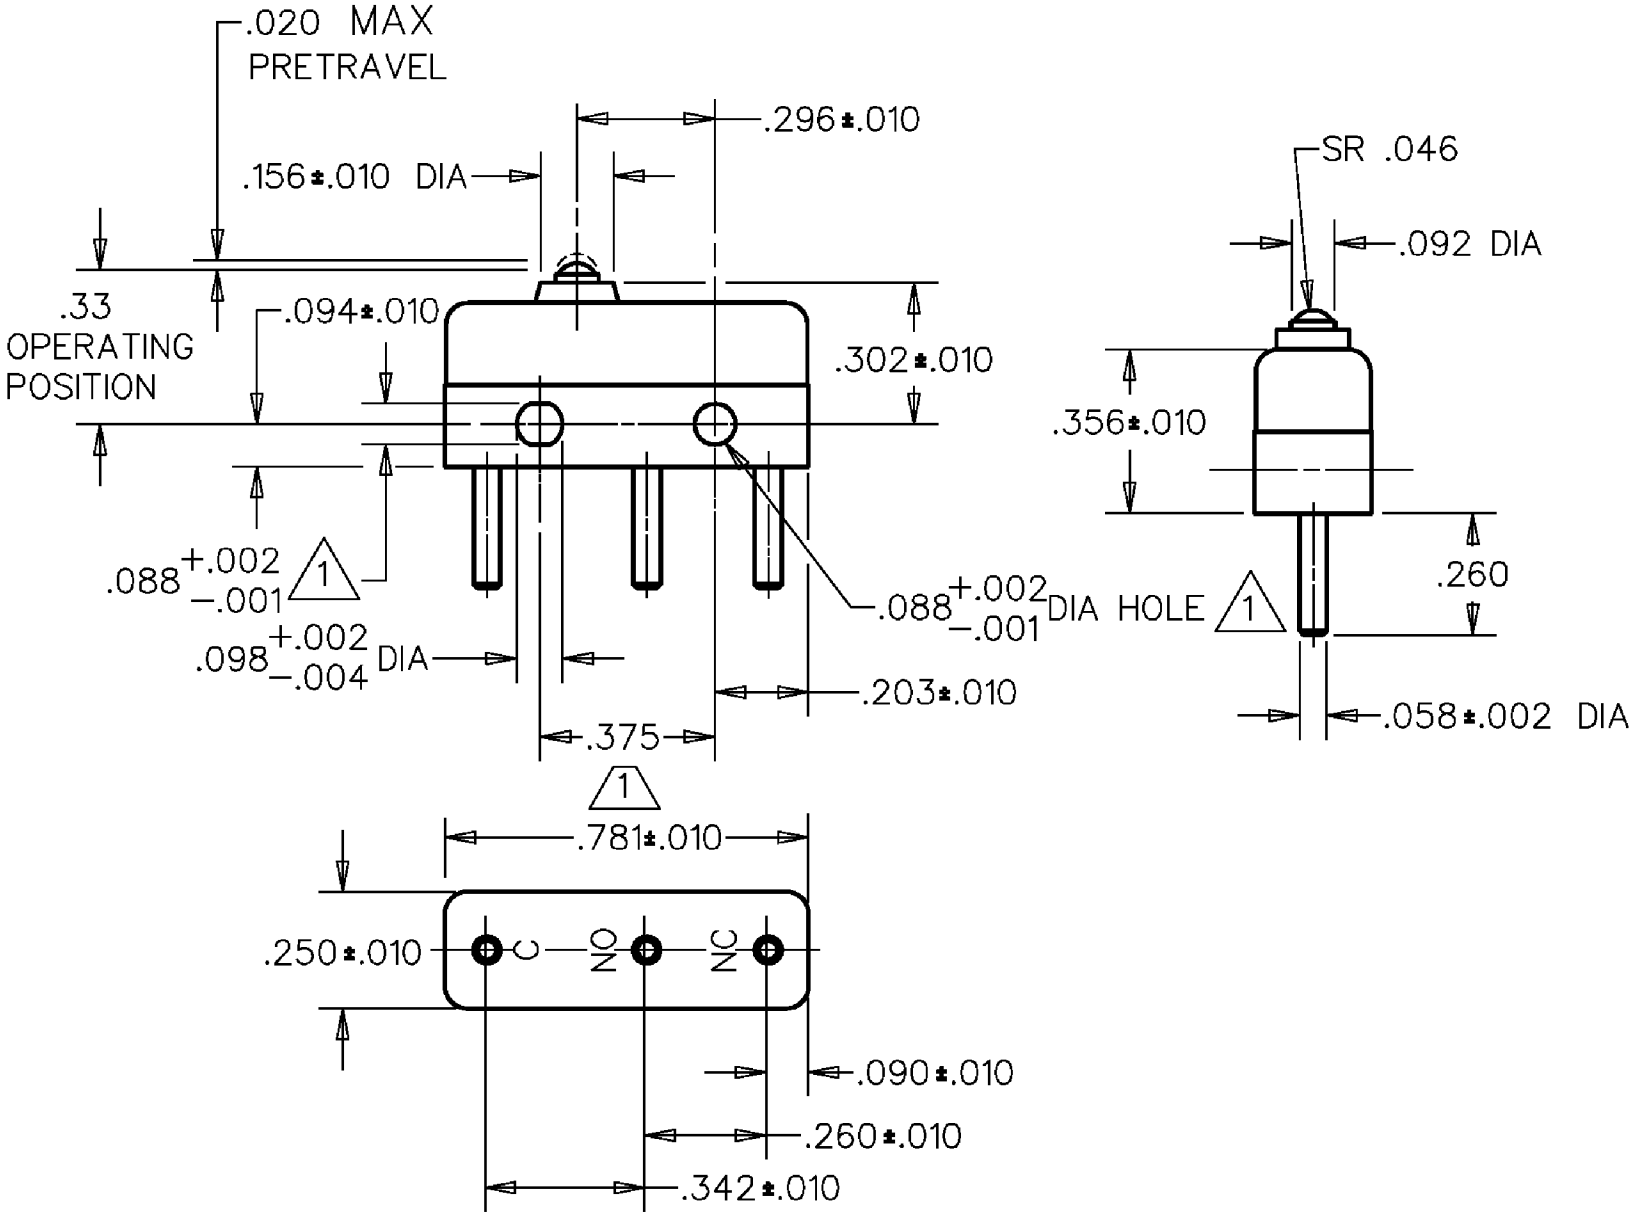


HONEYWELL PART NUMBER
11SM703-H2
PRODUCT CODE TWY2008


REV	DOCUMENT	CHANGED BY	CHECK
3	0038444	KVS 09APR08	ASD

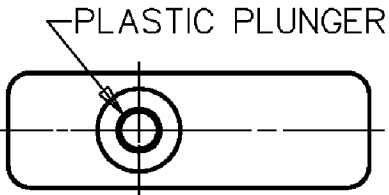

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO. PR-17293

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±			DRAWN	VK	13 FEB 08		Honeywell			
OPERATING FORCE — — 56 GRAM MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	13 FEB 08					
RELEASE FORCE— — — 14 GRAM MIN		30 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL— — — .002 MAX			SEA LEVEL	50,000 FT											
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE	3 AMP	2.5 AMP											
		RESISTIVE	5 AMP	5 AMP											
		MAXIMUM INRUSH 24 AMP			THIRD ANGLE PROJECTION 			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME		REV	
		APPROVALS						B	I	11SM703-H2		3			
		UL, CSA	4A, 250 VAC	 				BRAND L119	SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1			