


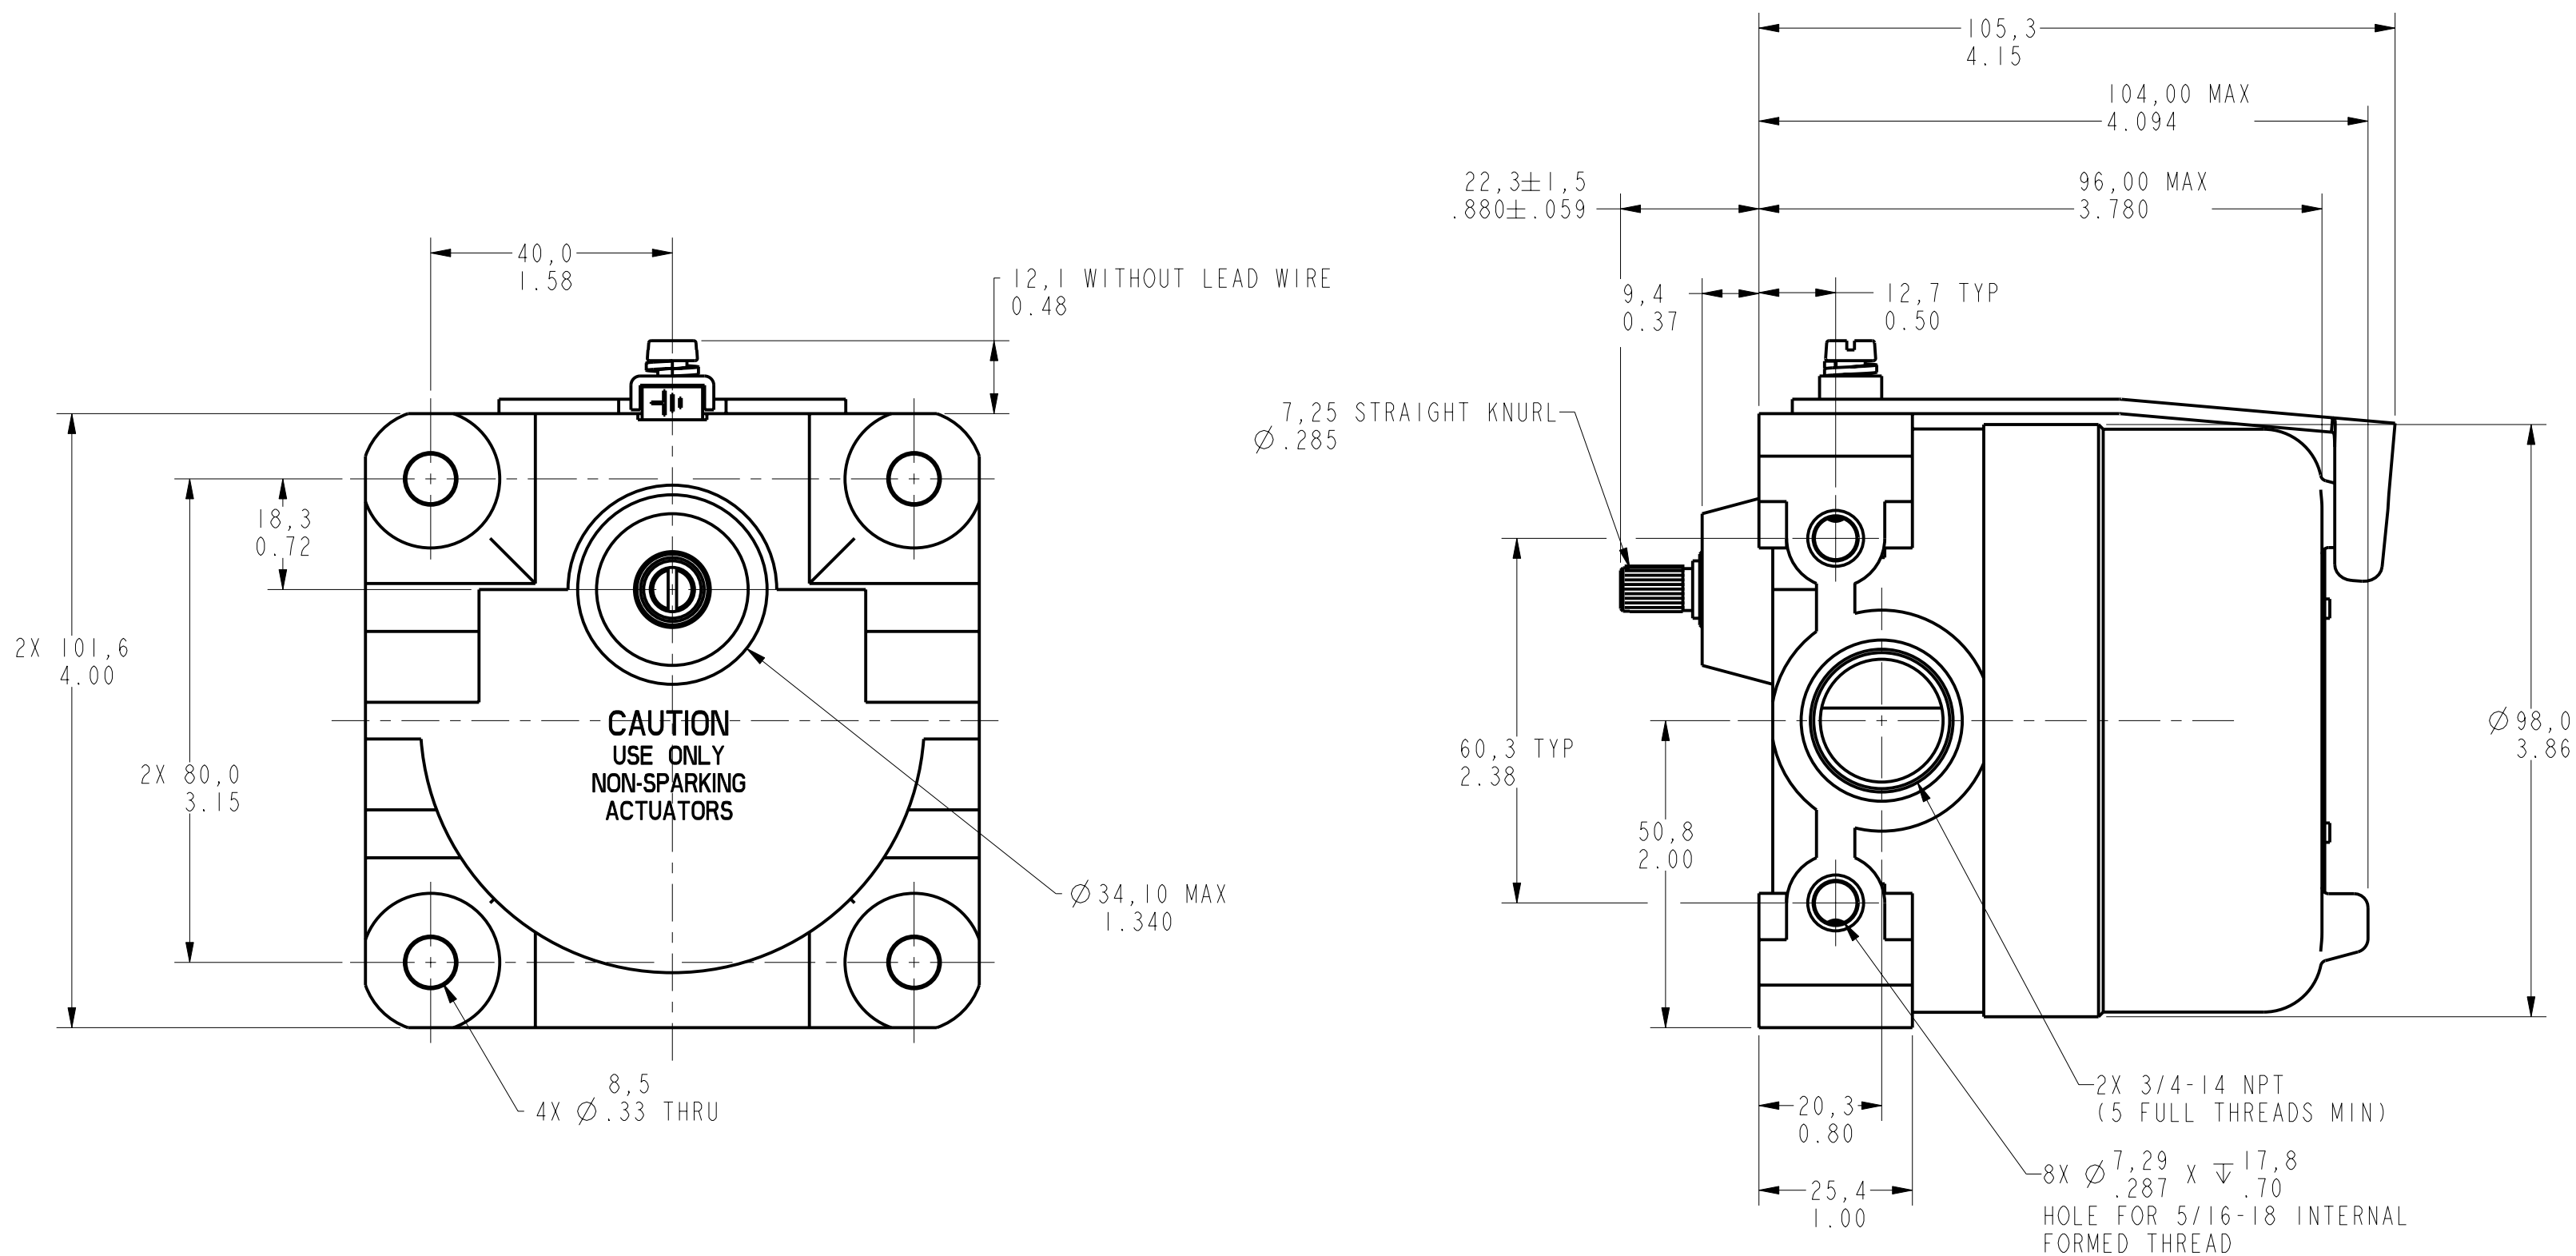

NOTES

- 1 - EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUPS C AND D; CLASS 2 GROUPS E, F AND G
- 2 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
- 3 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
- 4 - 6-32 UNC x (7,92) PAN HEAD TERMINAL SCREW AND LOCKWASHER (SEMS TERMI-LOX) (3 PER BASIC)
- 5 - CAMS MAY BE REPOSITIONED IN 7° 20' INCREMENTS
- 6 - 2 BASICS; EACH OPERATES CLOCKWISE AND COUNTER CLOCKWISE
- 7 - FOR USE IN TEMPERATURES UP TO 85°C
- 8 - SEE 7CX CHARTS 1 AND 2 (1 DRAWING) FOR LEVER ACTUATORS
- 9 - WEIGHT: 2.49 LB (1,13 Kg) APPROX
- 10 - UNIT PROVIDES NO SHAFT RESTORING FORCE. THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF SHAFT

CHARACTERISTICS	ELECTRICAL DATA
OPERATING TORQUE----- 0.37 LB FT (0.50 Nm) MAX	CONTACT ARRANGEMENT
PRETRAVEL----- 15° MAX	S P D T (EACH BASIC)
DIFFERENTIAL TRAVEL----- 10° MAX	L96
OVERTRAVEL----- 90° MIN	15A 125, 250 OR 480 VAC
	1/8HP 125 VAC, 1/4HP 250 VAC
	1/2A 125 VDC, 1/4A 250 VDC
	Ex CE UL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	☒ US (inch) CUSTOMARY	☐ SI (mm) METRIC
NO PLACE	X	±.040 ±.1
ONE PLACE	.X	±.030 ±0,4
TWO PLACE	.XX	±.015 ±0,15
THREE PLACE	.XXX	±.005 ±
ANGLES		±
RAW MATERIAL-COMMERCIAL STANDARD		
THIRD ANGLE PROJECTION		

DRAWN	JLH	14FEB03
CHECK	SAV	14FEB03
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
3D PTC	ASME Y14.5M-1994	

Honeywell			
TITLE			
SWITCH, ENCLOSED			
SIZE	DWG TYPE	DRAWING NAME	REV
C	I	11CX12E	1
SCALE	FULL	WEIGHT	SHEET
			1 OF 1