



HONEYWELL PART NUMBER
11SM1077-T
PRODUCT CODE TWY2330
JG-80643

REV	DOCUMENT	CHANGED BY	CHECK
7	0099644	RKA 12APR13	CMH

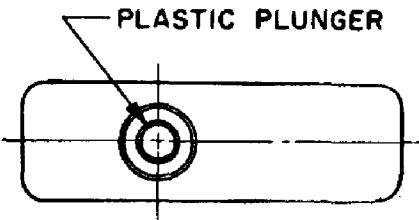


PLASTIC PLUNGER

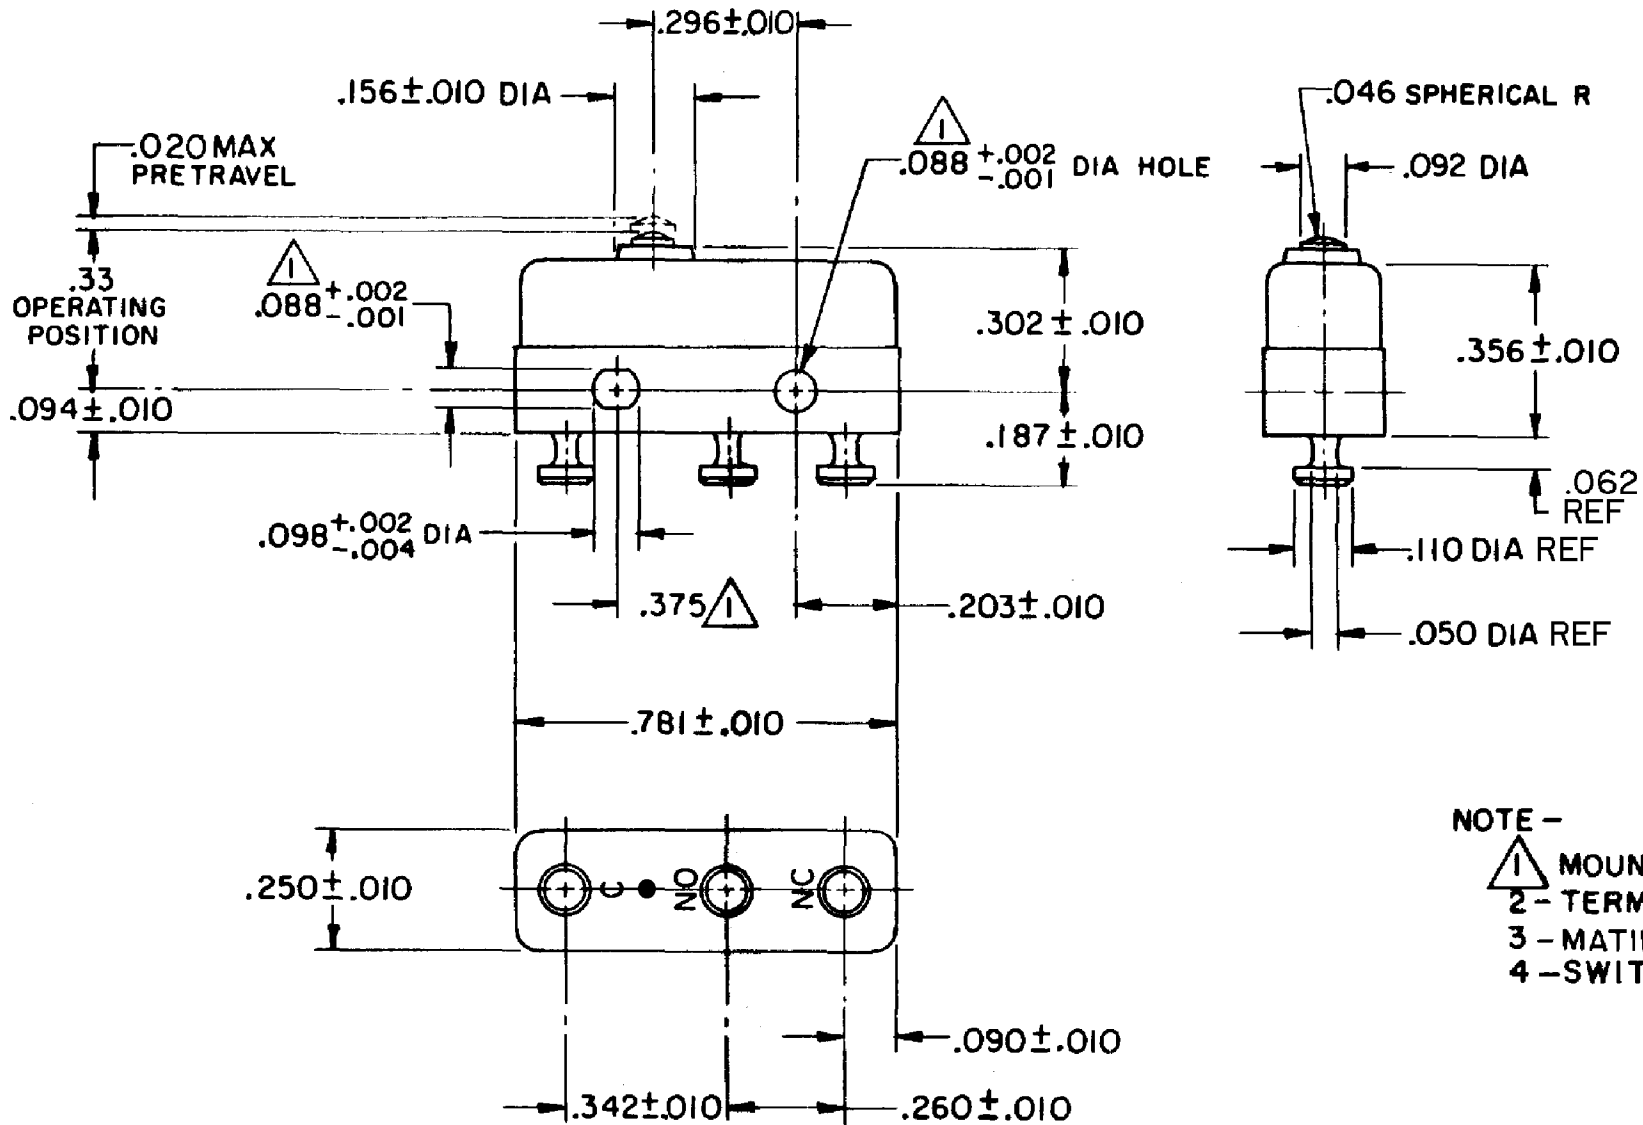

NOTE -
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - MATING CONTACT SURFACES ARE OVERLAYS OF 24K SOLID GOLD AND GOLD ALLOY
4 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.
PR - 4751

REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	VK	14 FEB 08		Honeywell				
OPERATING FORCE — — — — 3 - 5 OZ		CONTACT ARRANGEMENT SPDT		TOLERANCES UNLESS NOTED:		CHECK	RJ	14 FEB 08						
RELEASE FORCE— — — — 1 OZ MIN				NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE				
DIFFERENTIAL TRAVEL— — — .004 MAX				ONE PLACE .X ±										
OVERTRAVEL — — — — — .005 MIN				TWO PLACE .XX ±										
				THREE PLACE .XXX ±										
				FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
		APPROVALS		THIRD ANGLE PROJECTION		RASTER				B	I	11SM1077-T		7
		UL, CSA 0.1A 125 VAC 30 VDC   BRAND L171								SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	