


FO-55111-A

HONEYWELL
PART NUMBER

11SM144-H2

PRODUCT CODE
TWV4402

REV	DOCUMENT	CHANGED BY	CHECK
5	0079444	MBH 13JUL11	CMH

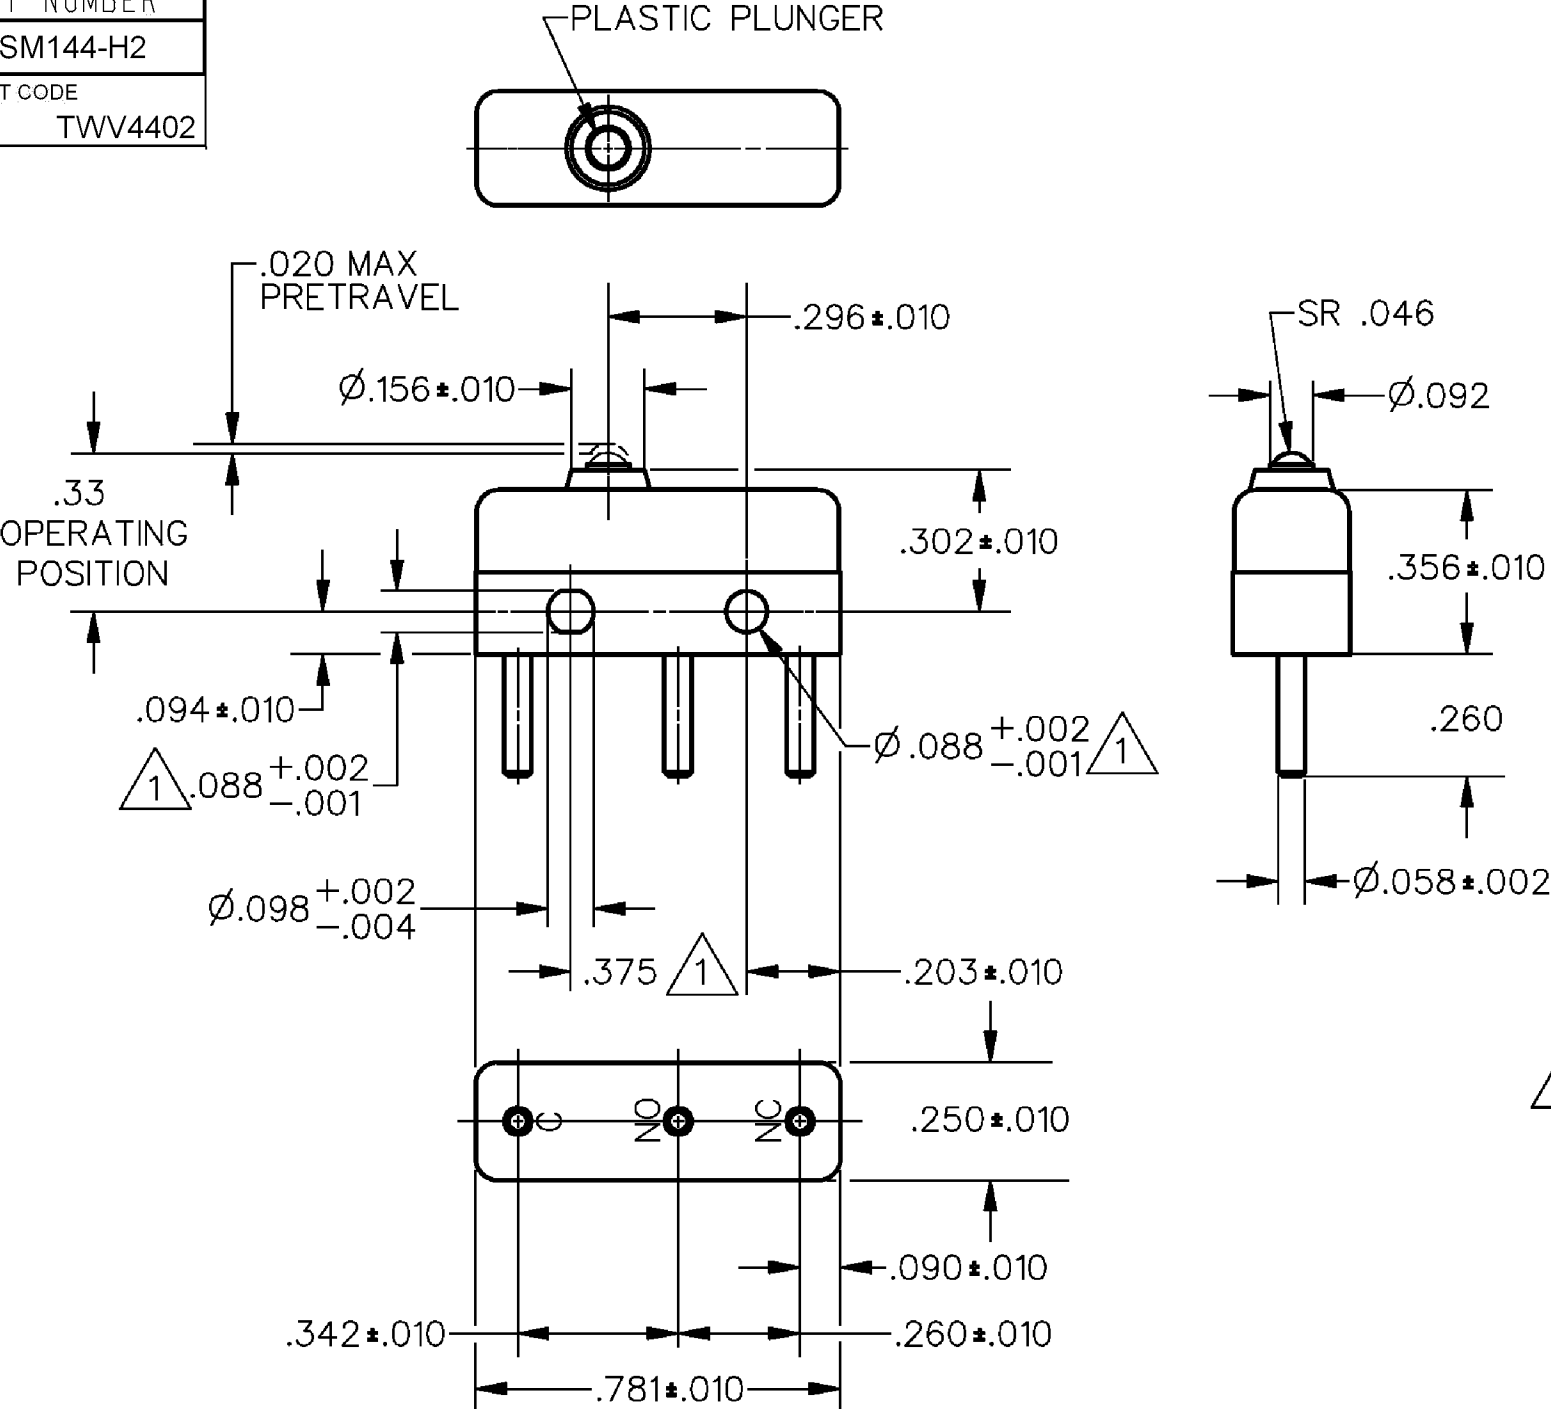

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 - 2 - PLATED TERMINALS WILL ACCEPT AIRCRAFT MARINE PRODUCTS CO NO 42429 CONNECTOR
 - 3 - SWITCH WILL WITHSTAND TEMPERATURES OF 250° F

RELEASE NO. PR - 20918

REPLACES X93286 - SM

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN		VK		27 NOV 07		Honeywell			
OPERATING FORCE – – – -3 OZ MAX		CONTACT ARRANGEMENT SPDT				TOLERANCES UNLESS NOTED:				CHECK		RJ		27 NOV 07					
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING				NO PLACE X ±				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL – – – .002 MAX						ONE PLACE .X ±													
OVERTRAVEL – – – – – .008 MIN		SEA LEVEL 50,000 FT				TWO PLACE .XX ±													
		INDUCTIVE 3 AMP 2.5 AMP				THREE PLACE .XXX ±													
		RESISTIVE 5 AMP 5 AMP				FOUR PLACE .XXXX ±													
		MAXIMUM INRUSH 24 AMP				ANGLES ±				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE		TYPE		DRAWING NAME		REV	
		APPROVALS		KEMA, CE		5A, 250V ~ T85 1E4				CE		B		I		11SM144-H2		5	
				UL, CSA		5A, 250 VAC				BRAND L4									
				UL		5A, 30 VDC				BRAND L304		RASTER		SCALE -		WEIGHT .006 LB MAX		SHEET 1 OF 1	