

HONEYWELL
PART NUMBER



11SM1777-H58

PRODUCT CODE

TWY3032

REV	DOCUMENT	CHANGED BY	CHECK
3	0038444	KVS 09APR08	ASD

PLASTIC PLUNGER

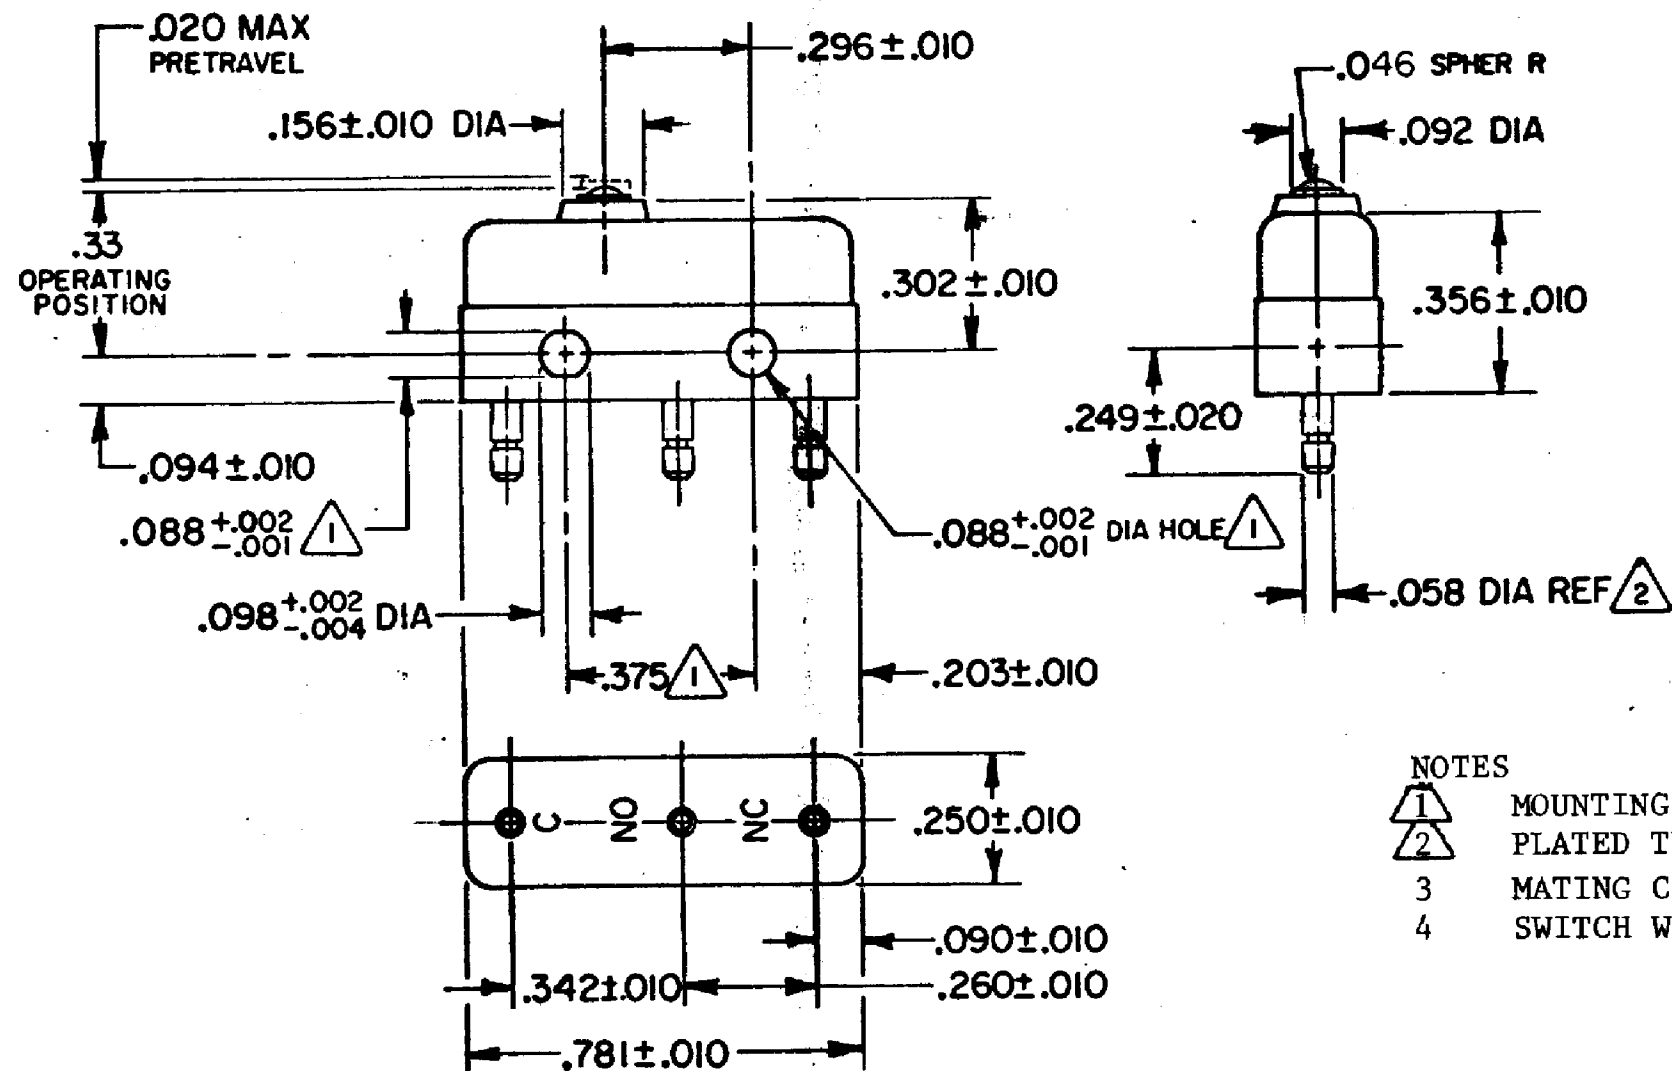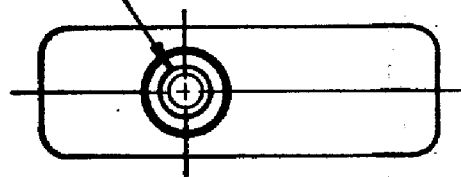

NOTES



- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA NO .375±.002 CENTERS
- 2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- 3 MATING CONTACT SURFACES ARE OVERLAYS OF 24K SOLID GOLD AND GOLD ALLOY
- 4 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.
PR - 10427

REPLACES

CHARACTERISTICS

OPERATING FORCE -- 56 GRAM MAX

RELEASE FORCE-- -- 14 GRAM MIN

DIFFERENTIAL TRAVEL-- -- .002 MAX

OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS

UL, CSA

0.1A 125 VAC 30 VDC

UL

BRAND

L171

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

0.030

0.015

0.005

THIRD ANGLE PROJECTION



DRAWN

VK

14 FEB 08

CHECK

RJ

14 FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

11SM1777-H58

REV

3

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1