
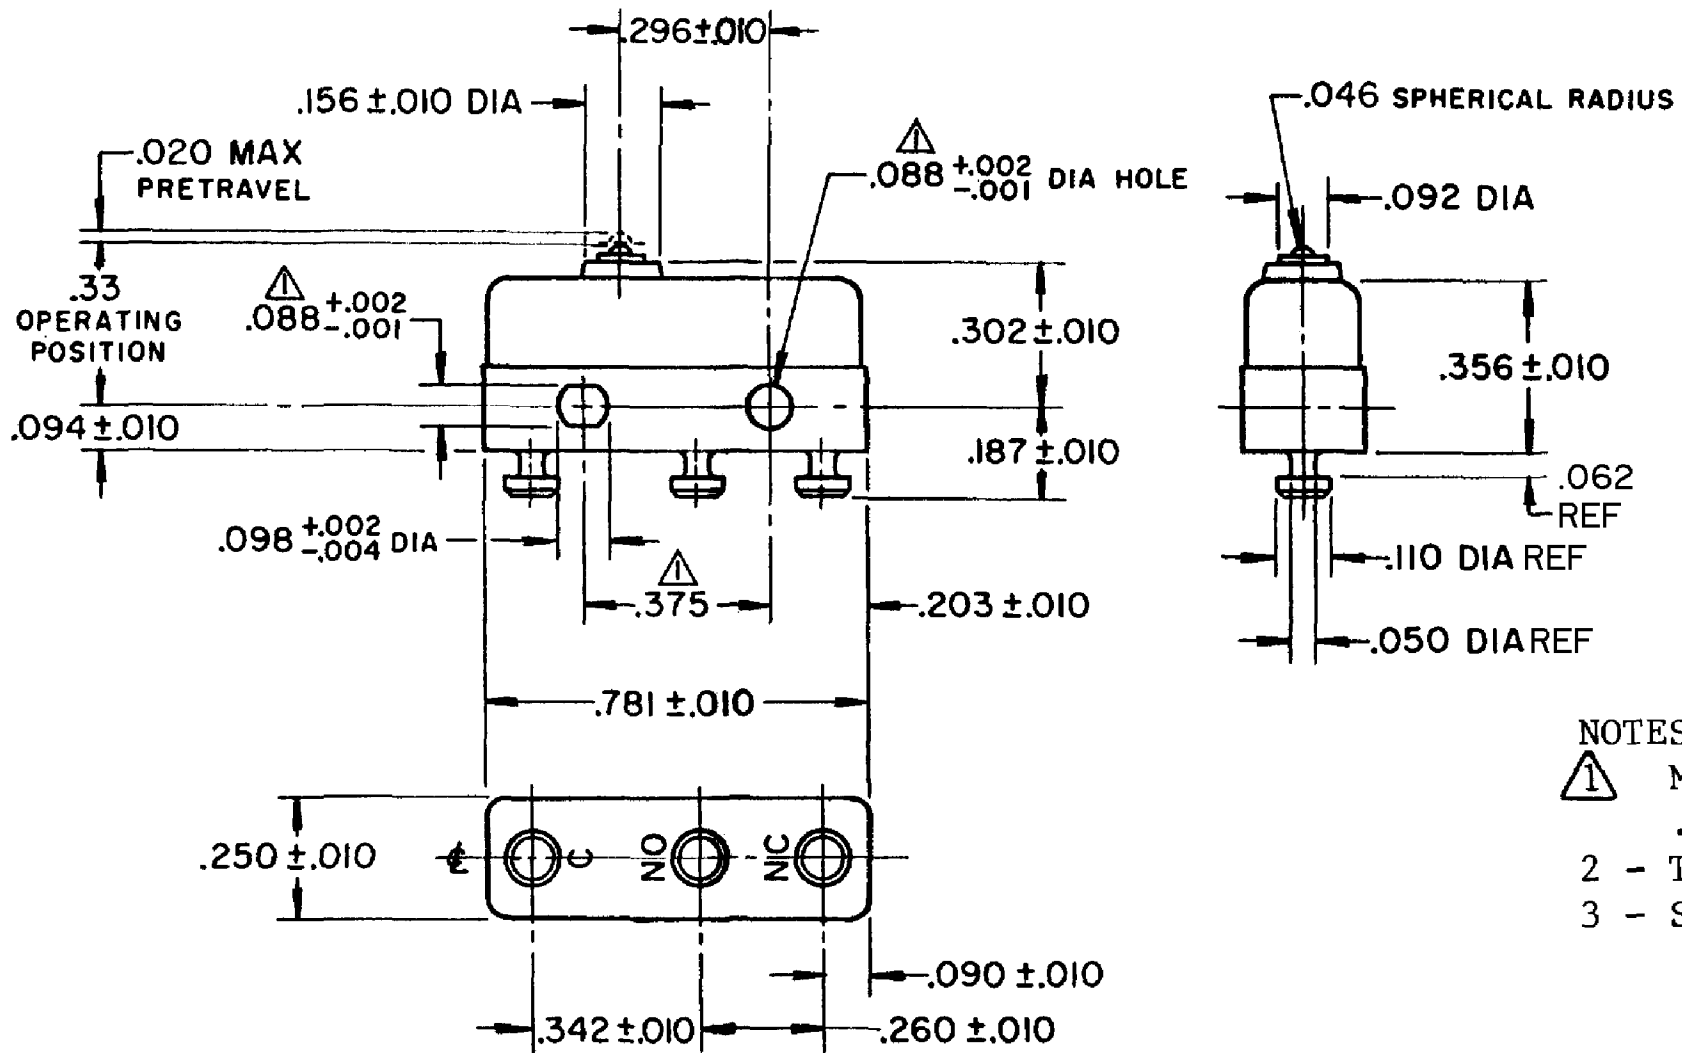


HONEYWELL PART NUMBER
11SM250-T
PRODUCT CODE TWW5000

REV	DOCUMENT	CHANGED BY	CHECK
6	0038223	SSK 17APR08	BLR

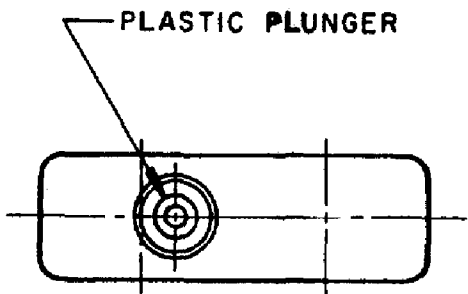

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F

RELEASE NO.	PR - 13991
REPLACES	X75298-SM

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 			DRAWN	VK	27 NOV 07	Honeywell				
OPERATING FORCE — — 3 1/2 OZ MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	27 NOV 07					
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING			0.030 0.015 0.005			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .002 MAX			SEA LEVEL	50,000 FT											
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE	3 AMP	2.5 AMP				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		RESISTIVE	5 AMP	5 AMP							B	I	11SM250-T		6
								RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	
	APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4												
		UL, CSA	5A, 250 VAC, 30 VDC		BRAND	L151									