
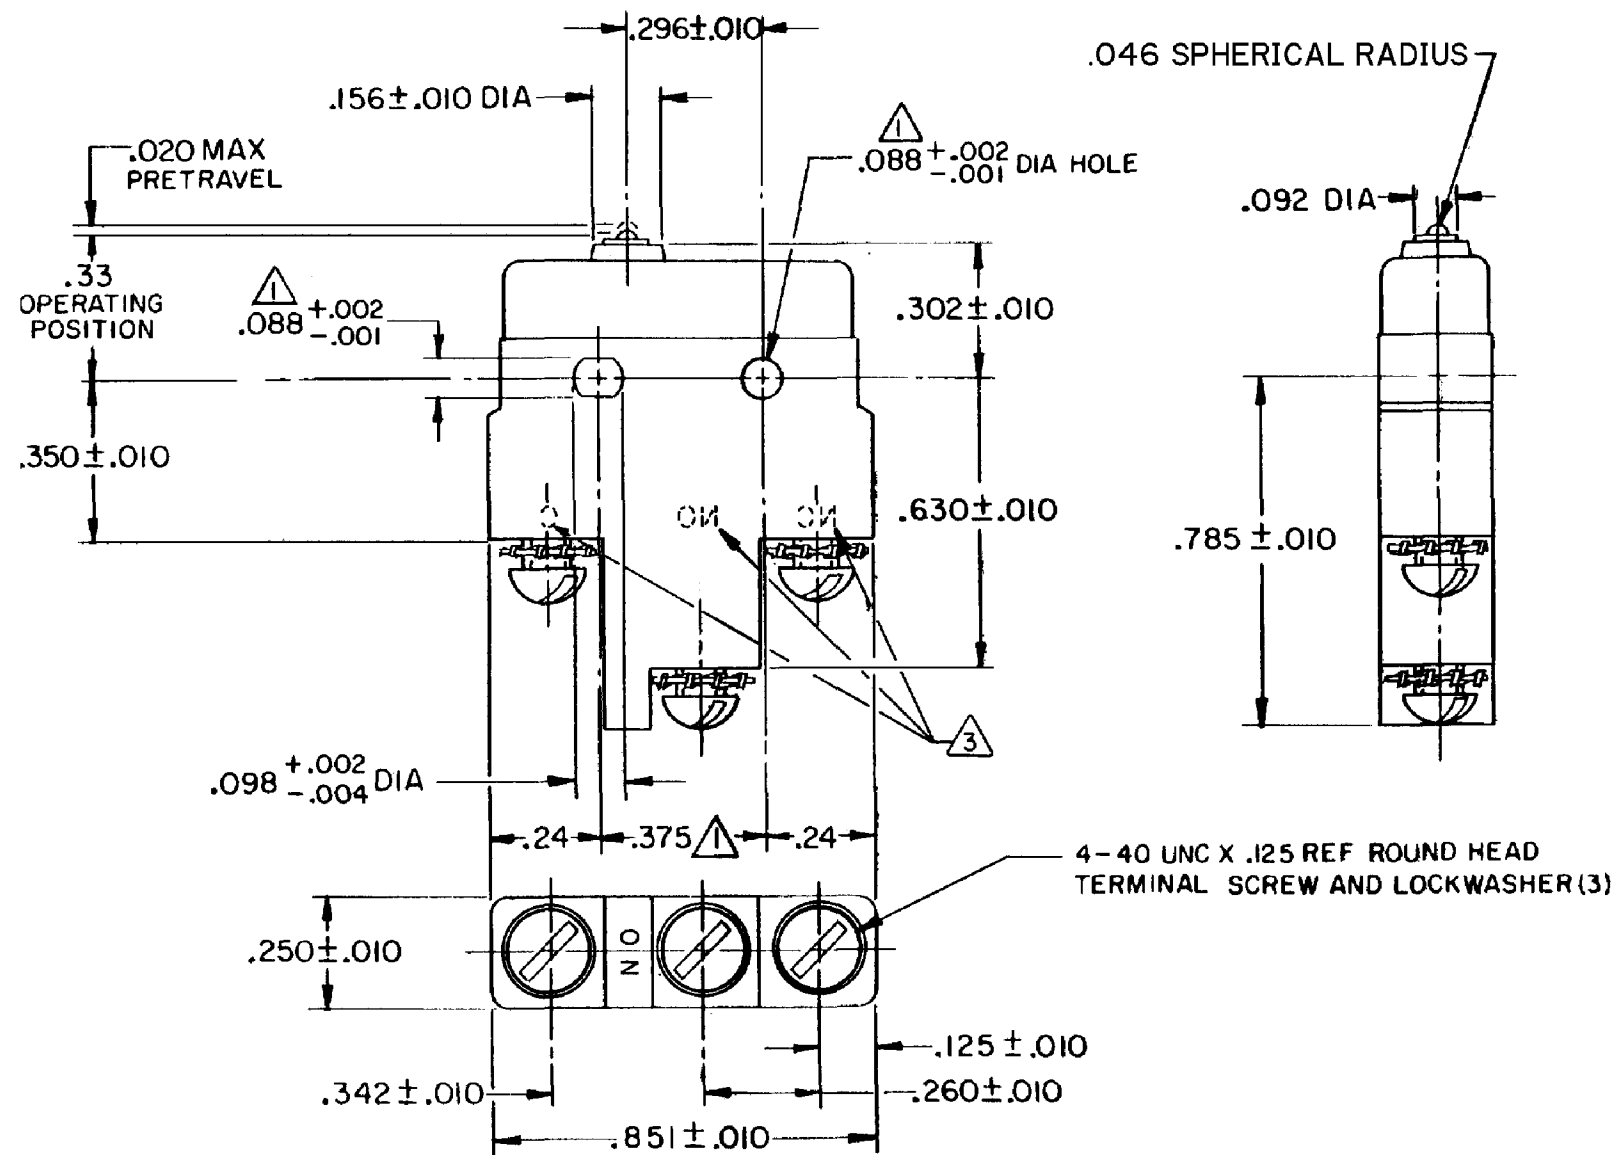


REV	DOCUMENT	CHANGED BY	CHECK
9	0038090	VS 28APR08	BLR

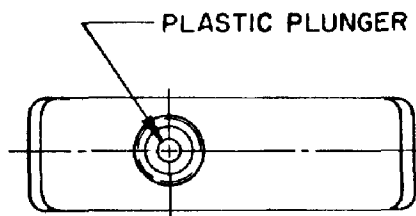

- ① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON $.375 \pm .002$ CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- ③ - TERMINAL DESIGNATION STAMPED ON BOTH SIDES OF SWITCH

RELEASE NO.	PR - 3062
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	VK	27 NOV 07					
OPERATING FORCE — — — — 3 - 5 OZ		CONTACT ARRANGEMENT S P D T								CHECK	RJ	27 NOV 07					
RELEASE FORCE— — — — — 1 OZ MIN		30 VOLTS DC RATING								THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC			
			SEA LEVEL	50,000 FT													
DIFFERENTIAL TRAVEL— — — .004 MAX		INDUCTIVE	3 AMP	2.5 AMP													
OVERTRAVEL — — — — — .005 MIN		RESISTIVE	5 AMP	5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV			
		MAXIMUM INRUSH 24 AMP								B	I	11SM3-S		9			
		KEMA, CE	5A, 250V ~ T85 1E4														
		UL, CSA	5A, 250 VAC			BRAND L4											