

HONEYWELL
PART NUMBER



11SM38

PRODUCT CODE

TWT3800

JG-80225

REV	DOCUMENT	CHANGED BY	CHECK
12	0038091	VS 28APR08	BLR

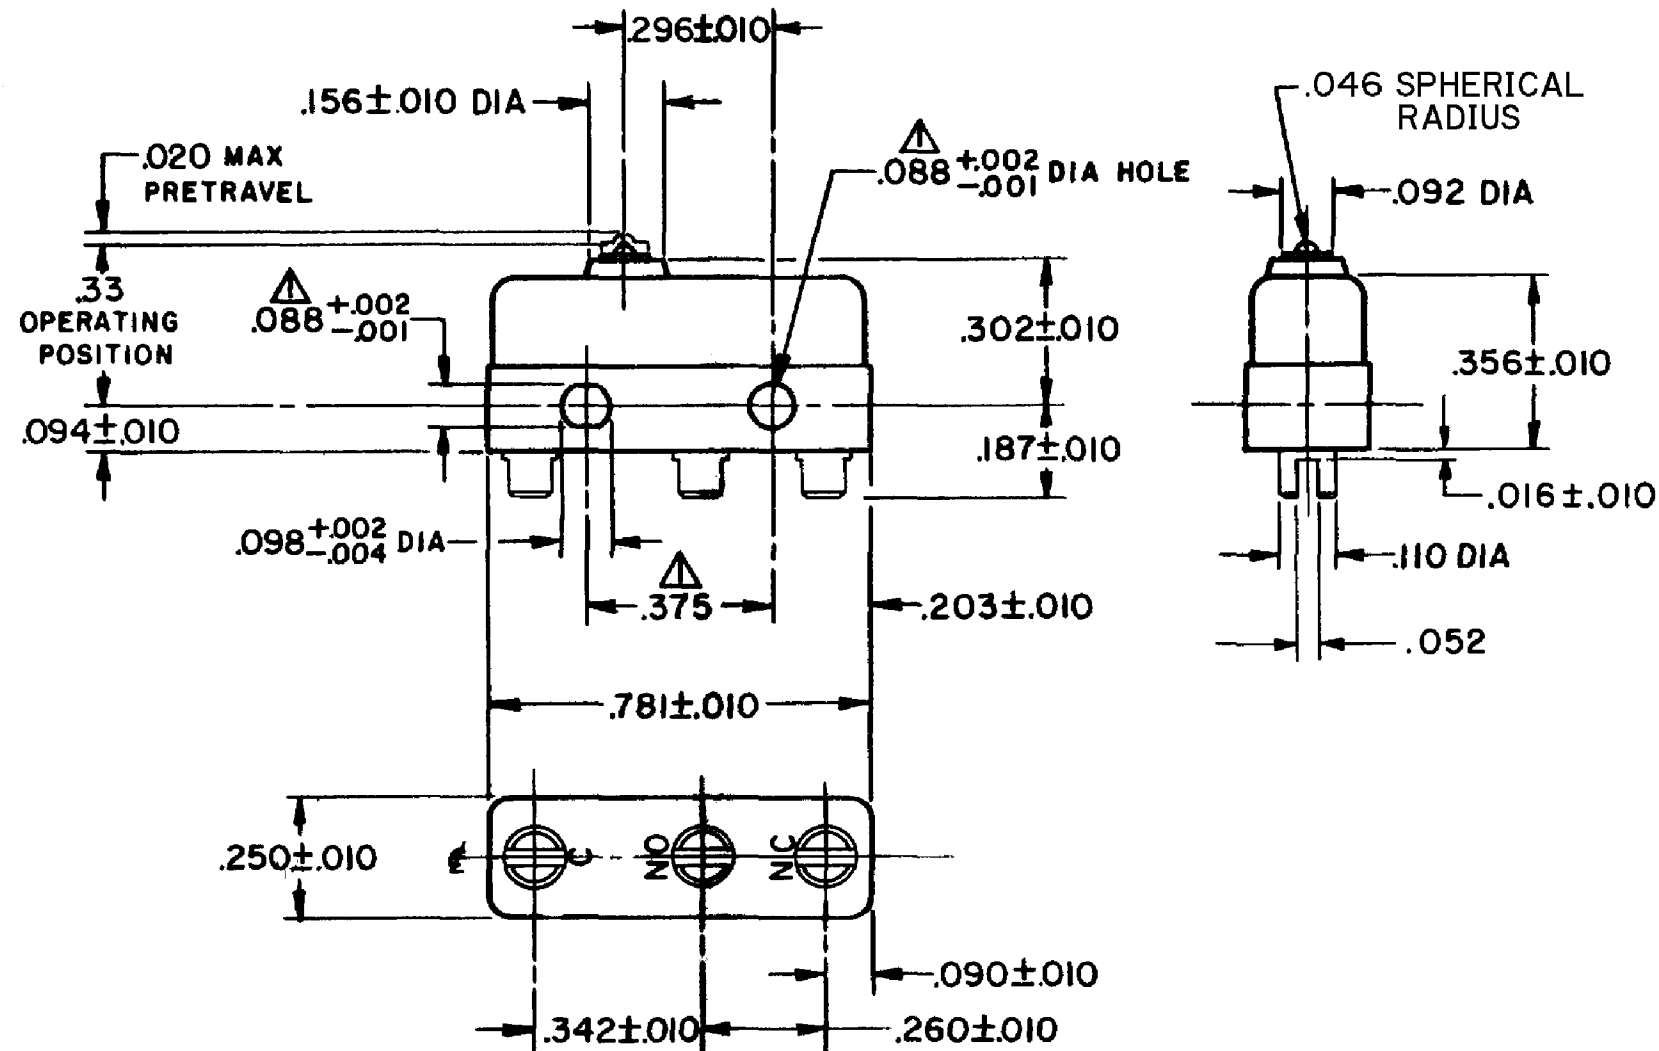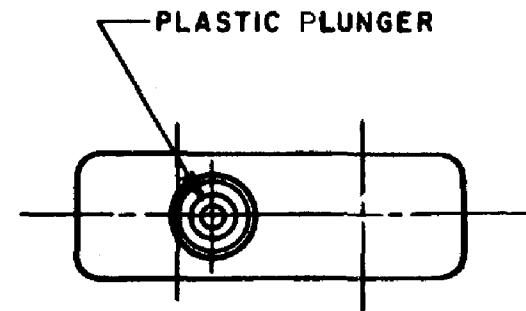

NOTE—

▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING
3-SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.

REPLACES

CHARACTERISTICS

OPERATING FORCE — — — — 3 - 5 OZ

RELEASE FORCE — — — — 1 OZ MIN

DIFFERENTIAL TRAVEL — — .004 MAX

OVERTRAVEL — — — — .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC	UL

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	11SM38	12
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1