
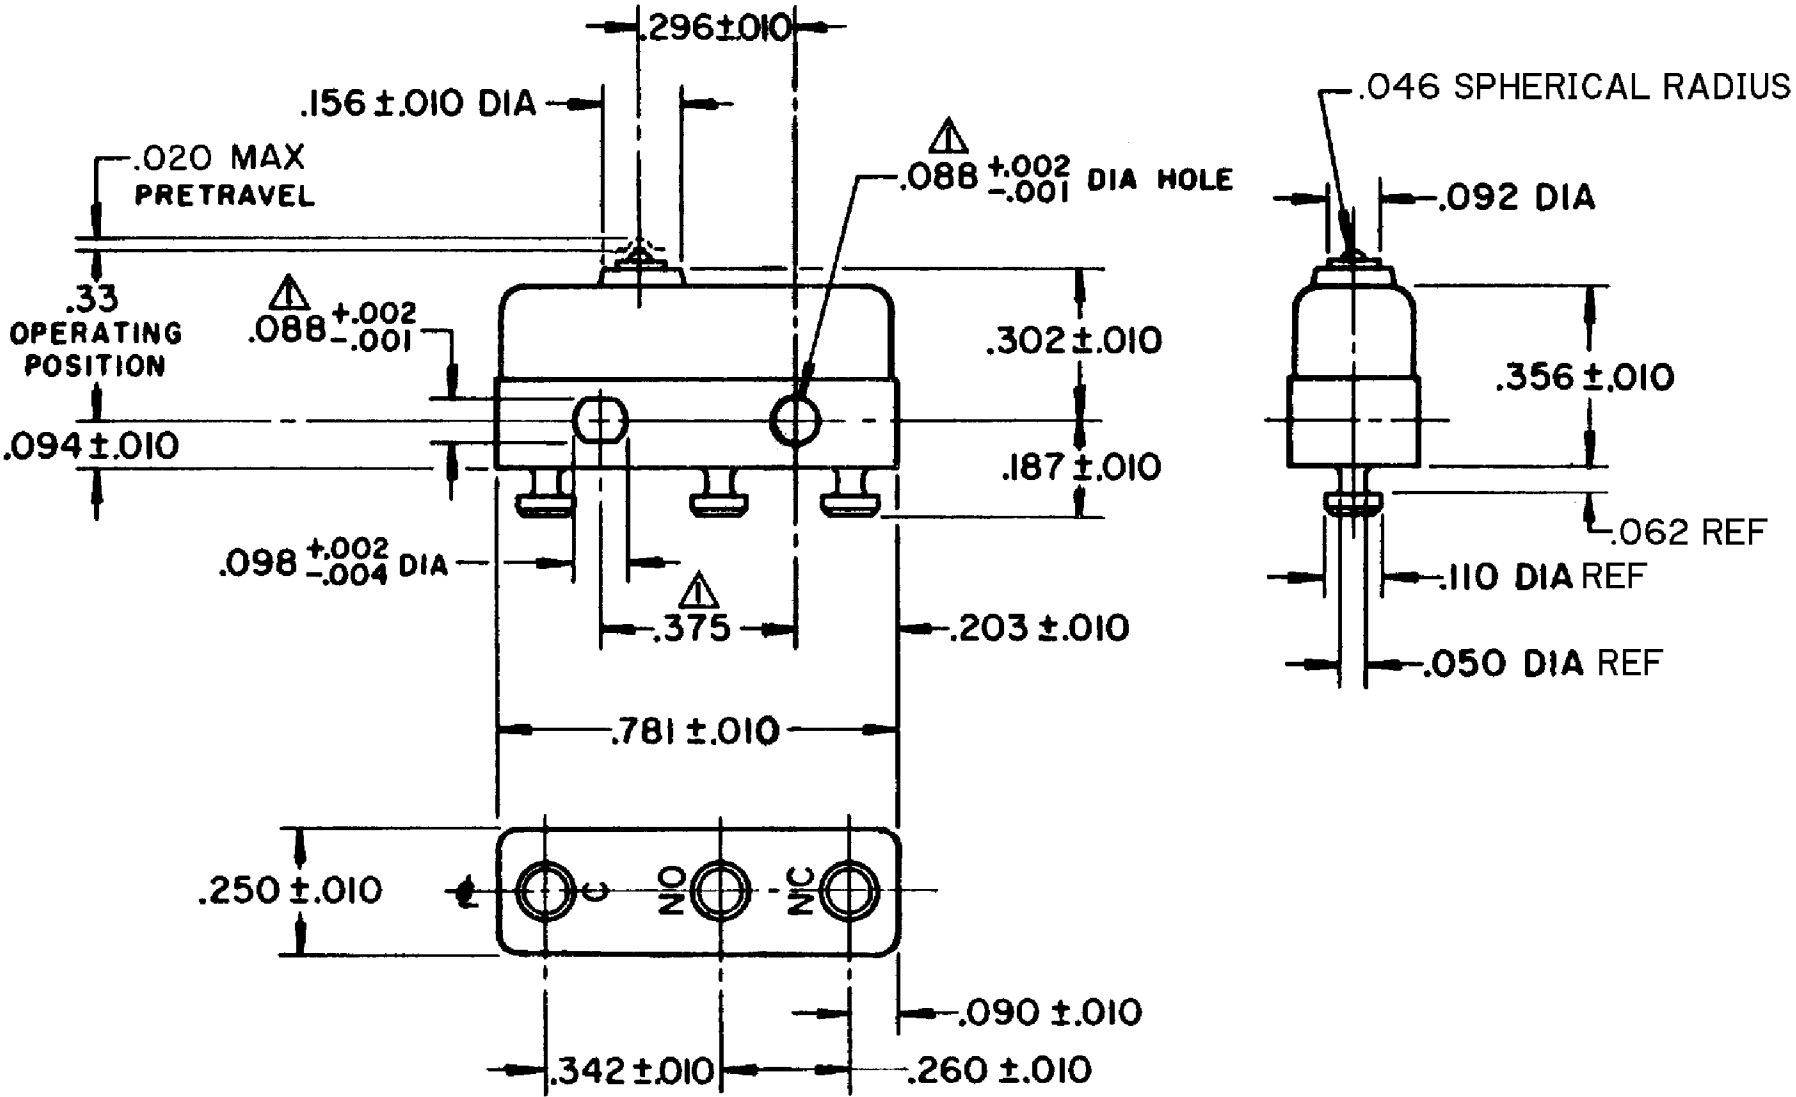


HONEYWELL PART NUMBER
11SM403-T
PRODUCT CODE TWY0360

REV	DOCUMENT	CHANGED BY	CHECK
9	0038104	PK 23APR08	ASD

PLASTIC PLUNGER

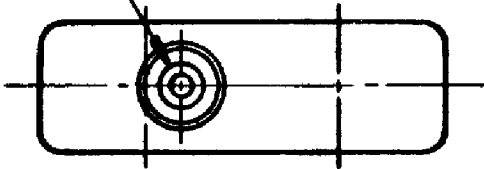

NOTE -

- ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
- 2-TERMINALS ARE PLATED FOR SOLDERING
- 3-DEAD BREAK CONDITIONS:
- A-MAX AMOUNT PERMISSIBLE - -.0002 IN
- 4-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. SR - 12652

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN		VK		27 NOV 07		Honeywell			
OPERATING FORCE — — — 3 1/2 OZ MAX		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK		RJ		27 NOV 07					
RELEASE FORCE — — — — 1 OZ MIN		30 VOLTS DC RATING			NO PLACE X ±		0.030 0.015 0.005		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE			
DIFFERENTIAL TRAVEL — — — .001 MAX					ONE PLACE .X ±											
OVERTRAVEL — — — — — .005 MIN		SEA LEVEL 50,000 FT			TWO PLACE .XX ±											
		INDUCTIVE 3 AMP 2.5 AMP			THREE PLACE .XXX ±											
		RESISTIVE 5 AMP 5 AMP			FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE		TYPE		DRAWING NAME		REV	
		MAXIMUM INRUSH 24 AMP			ANGLES ±				B		I		11SM403-T		9	
		APPROVALS			THIRD ANGLE PROJECTION		RASTER		SCALE		-		WEIGHT .006 LB MAX		SHEET 1 OF 1	
		KEMA, CE 5A, 250V ~ T85 1E4 														
		UL, CSA 5A, 250 VAC   BRAND L4														