

FO-55111-A

HONEYWELL
PART NUMBER



11SM423-H4

PRODUCT CODE

TWY1153

REV	DOCUMENT	CHANGED BY	CHECK
5	0038104	PK 23APR08	ASD

PLASTIC PLUNGER

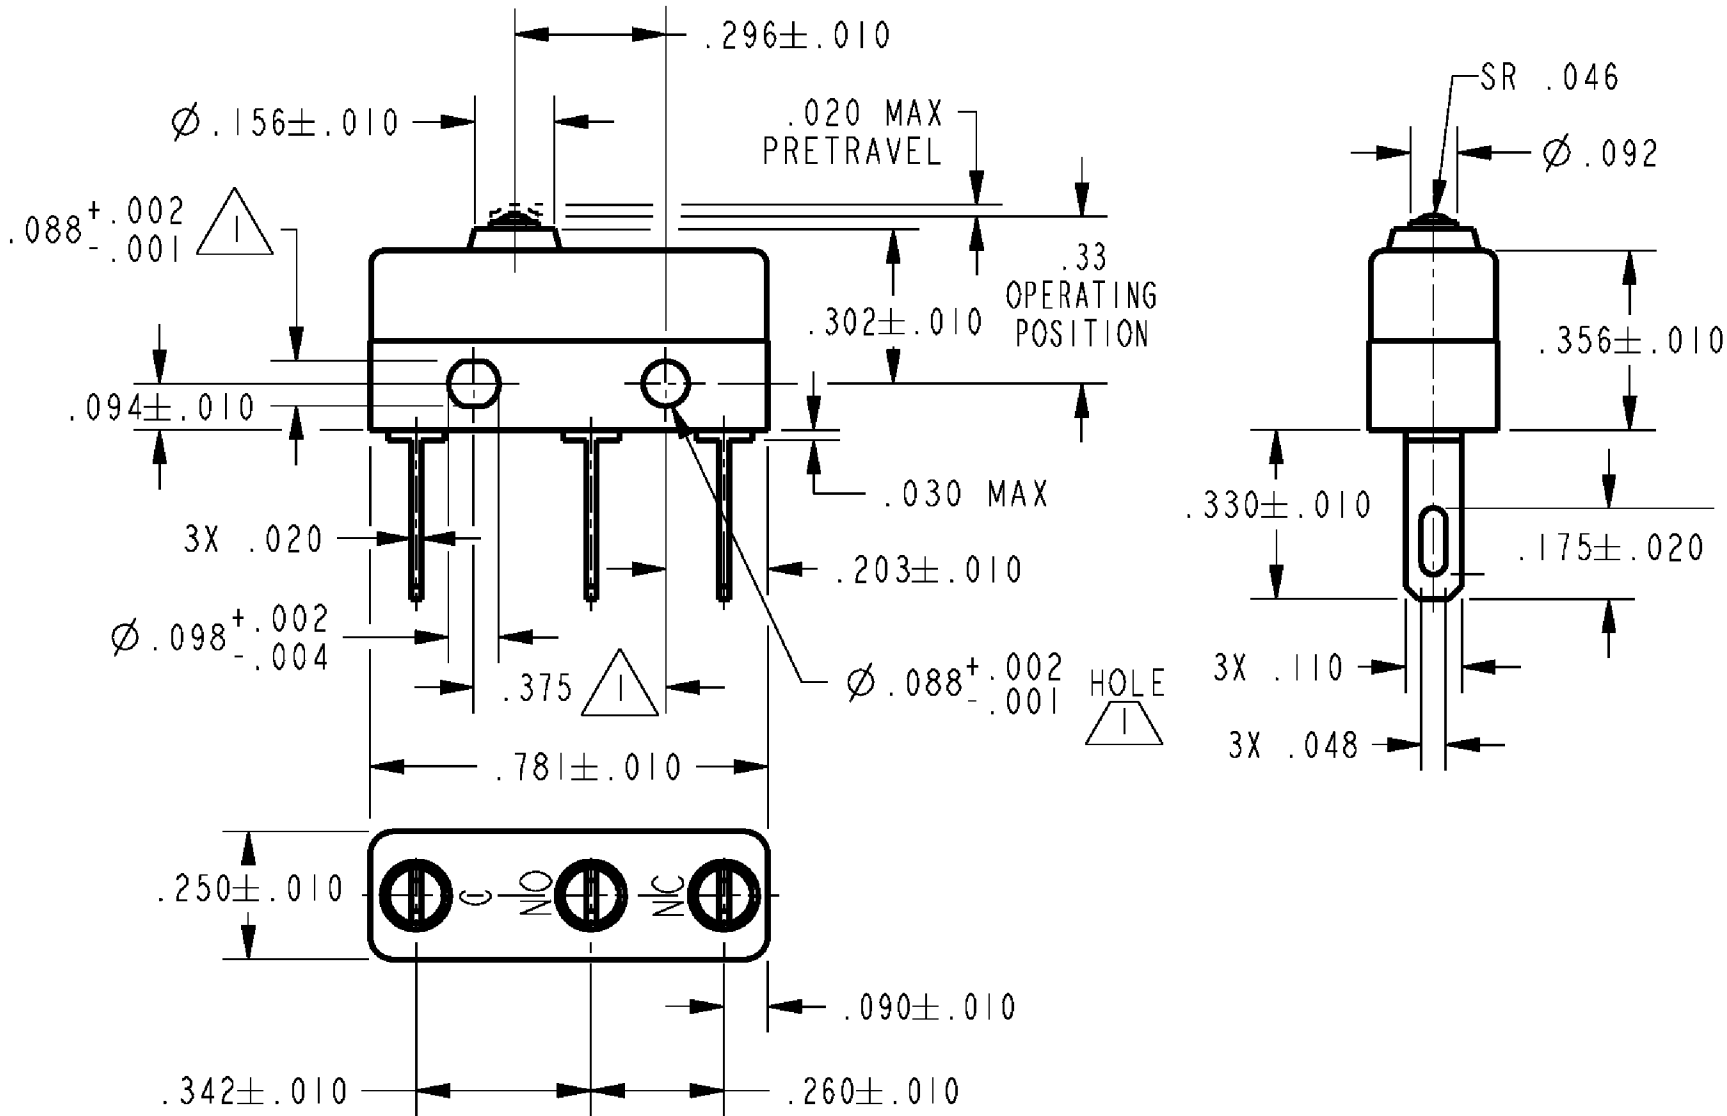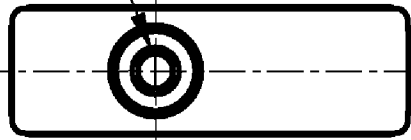

- NOTES
- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .087$ MAX ON $.375 \pm .002$ CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - DEAD BREAK CONDITIONS:
A - MAX AMOUNT PERMISSIBLE - - - - - $.0002$ IN
- 4 - MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO. PR-22286

REPLACES X100625-SM

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN		VK		27 NOV 07		Honeywell			
OPERATING FORCE — — — 3 1/2 OZ MAX		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK		RJ		27 NOV 07					
RELEASE FORCE — — — — 1 OZ MIN		30 VOLTS DC RATING			NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE							
DIFFERENTIAL TRAVEL — — — .001 MAX					ONE PLACE .X ±											
OVERTRAVEL — — — — — .005 MIN		SEA LEVEL 50,000 FT			TWO PLACE .XX ±											
		INDUCTIVE 1/2 AMP 1/2 AMP			THREE PLACE .XXX ±											
		RESISTIVE 1 AMP 1 AMP			FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE		TYPE		DRAWING NAME		REV	
		MAXIMUM INRUSH 2 AMP			ANGLES ±											
		APPROVALS			THIRD ANGLE PROJECTION				B		I		11SM423-H4		5	
		KEMA, CE 1A, 250V ~ T85 1E4														
		UL, CSA 1A, 125 VAC														
		</														