


HONEYWELL
PART NUMBER

11SM4601-H4


PRODUCT CODE

TWZ2610

REV	DOCUMENT	CHANGED BY	CHECK
6	0038224	KVS 22APR08	ASD

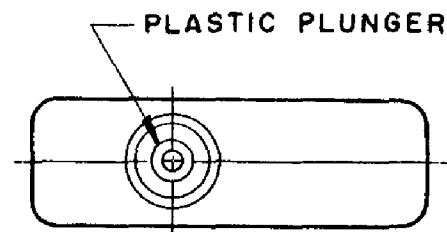

PLASTIC PLUNGER

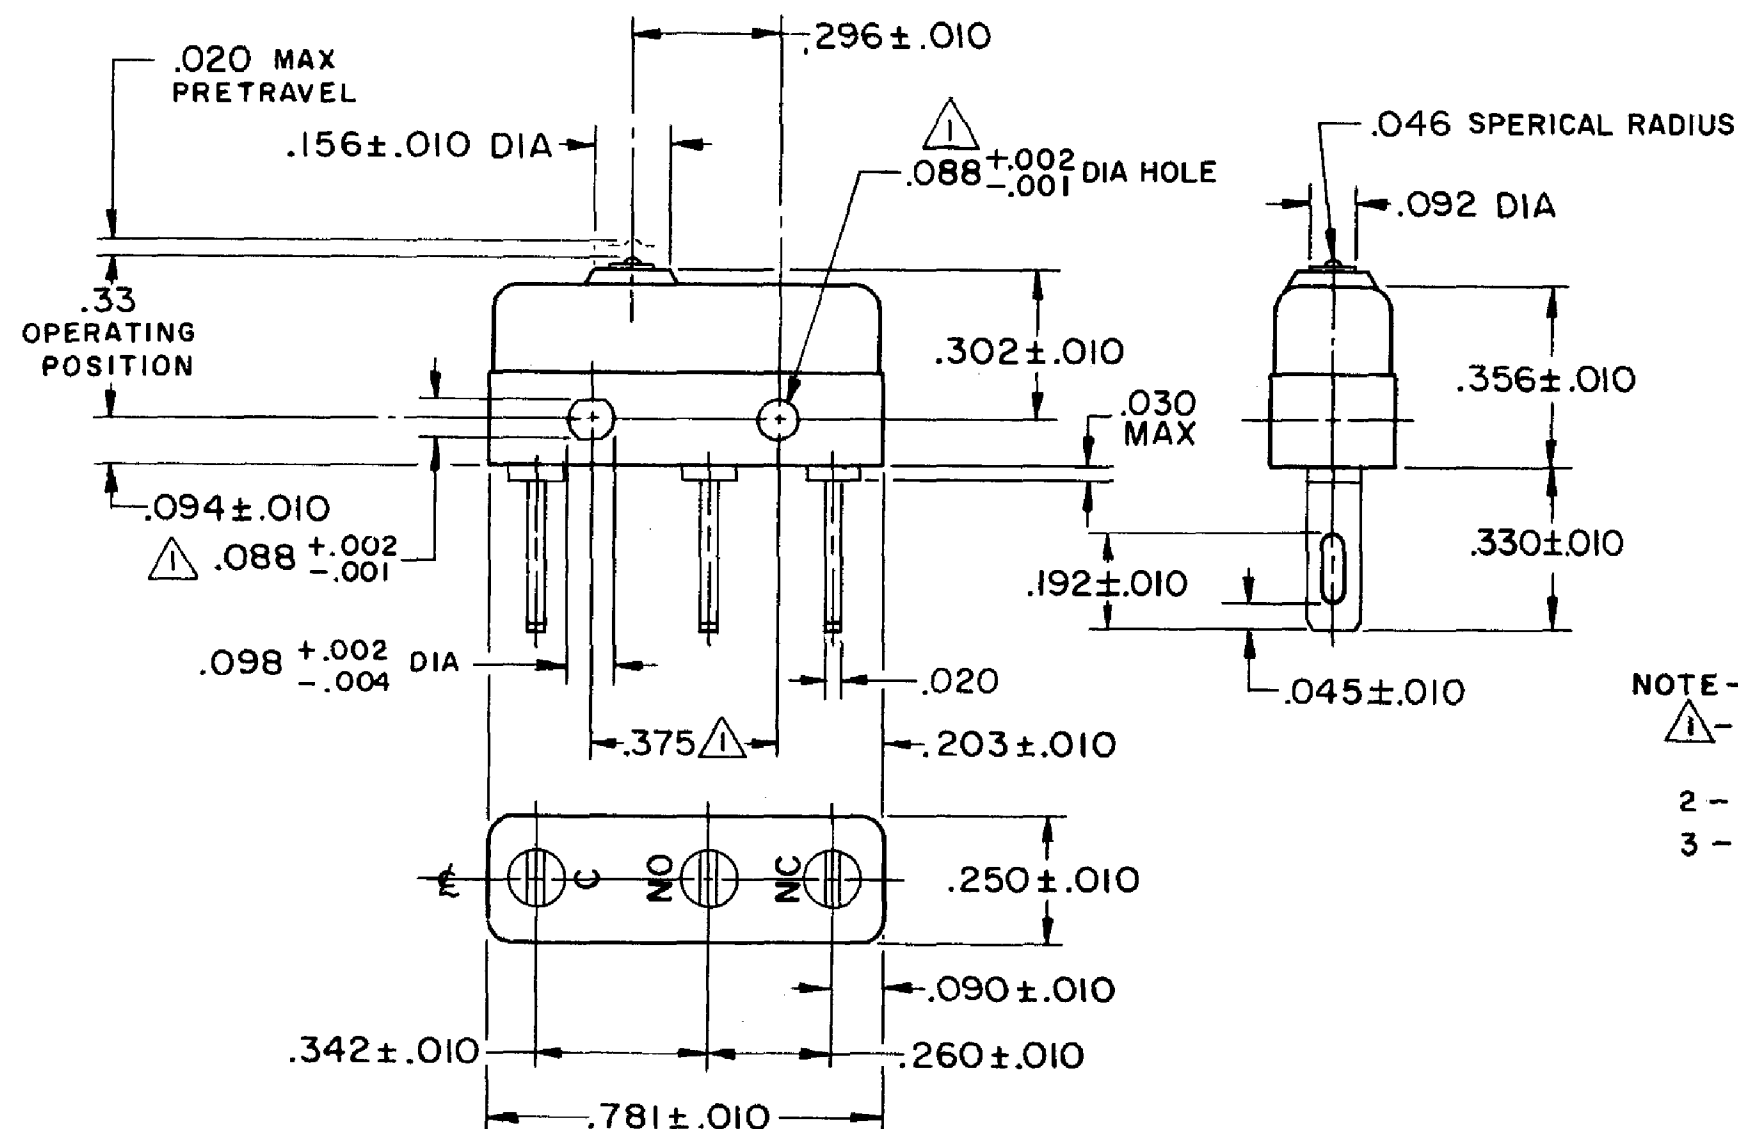

NOTE -

1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS

2 - TERMINALS ARE PLATED FOR SOLDERING

3 - DEAD BREAK CONDITIONS:

A - MAX AMOUNT PERMISSIBLE ----- .0002 IN

B - LOAD ----- 10 VAC

.035 AMPS

C - PLUNGER TRAVEL RATE ----- .015 IN. PER MINUTE

RELEASE NO. PR - 6102

REPLACES

CHARACTERISTICS

OPERATING FORCE - - - 3 1/2 OZ MAX

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - .001 MAX

OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC	UL

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±

THIRD ANGLE PROJECTION



DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	11SM4601-H4	6
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1