


REV	DOCUMENT	CHANGED BY	CHECK
13	0038091	VS 28APR08	BLR

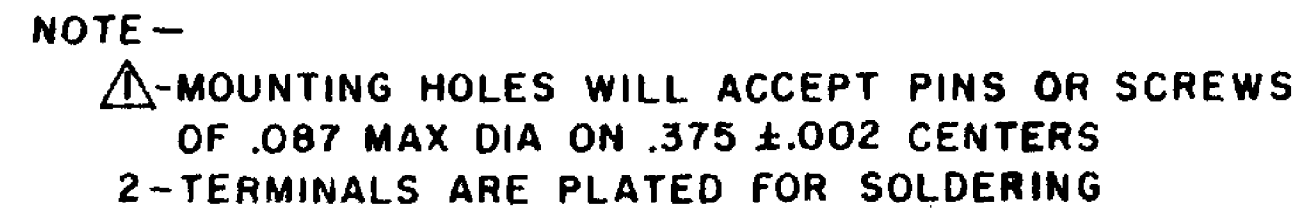

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	VK	27 NOV 07	Honeywell			
OPERATING FORCE – – – – 3 OZ MAX		CONTACT ARRANGEMENT S P D T								CHECK	RJ	27 NOV 07				
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				SIZE B TYPE I DRAWING NAME 11SM54-T REV 13						
DIFFERENTIAL TRAVEL – – – .002 MAX		SEA LEVEL 50,000 FT														
OVERTRAVEL – – – – .005 MIN		INDUCTIVE 3 AMP 2.5 AMP														
		RESISTIVE 5 AMP 5 AMP														
		MAXIMUM INRUSH 24 AMP								INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4														
	UL, CSA	5A, 250 VAC														
										SCALE - WEIGHT .006 LB MAX SHEET 1 OF 1						