
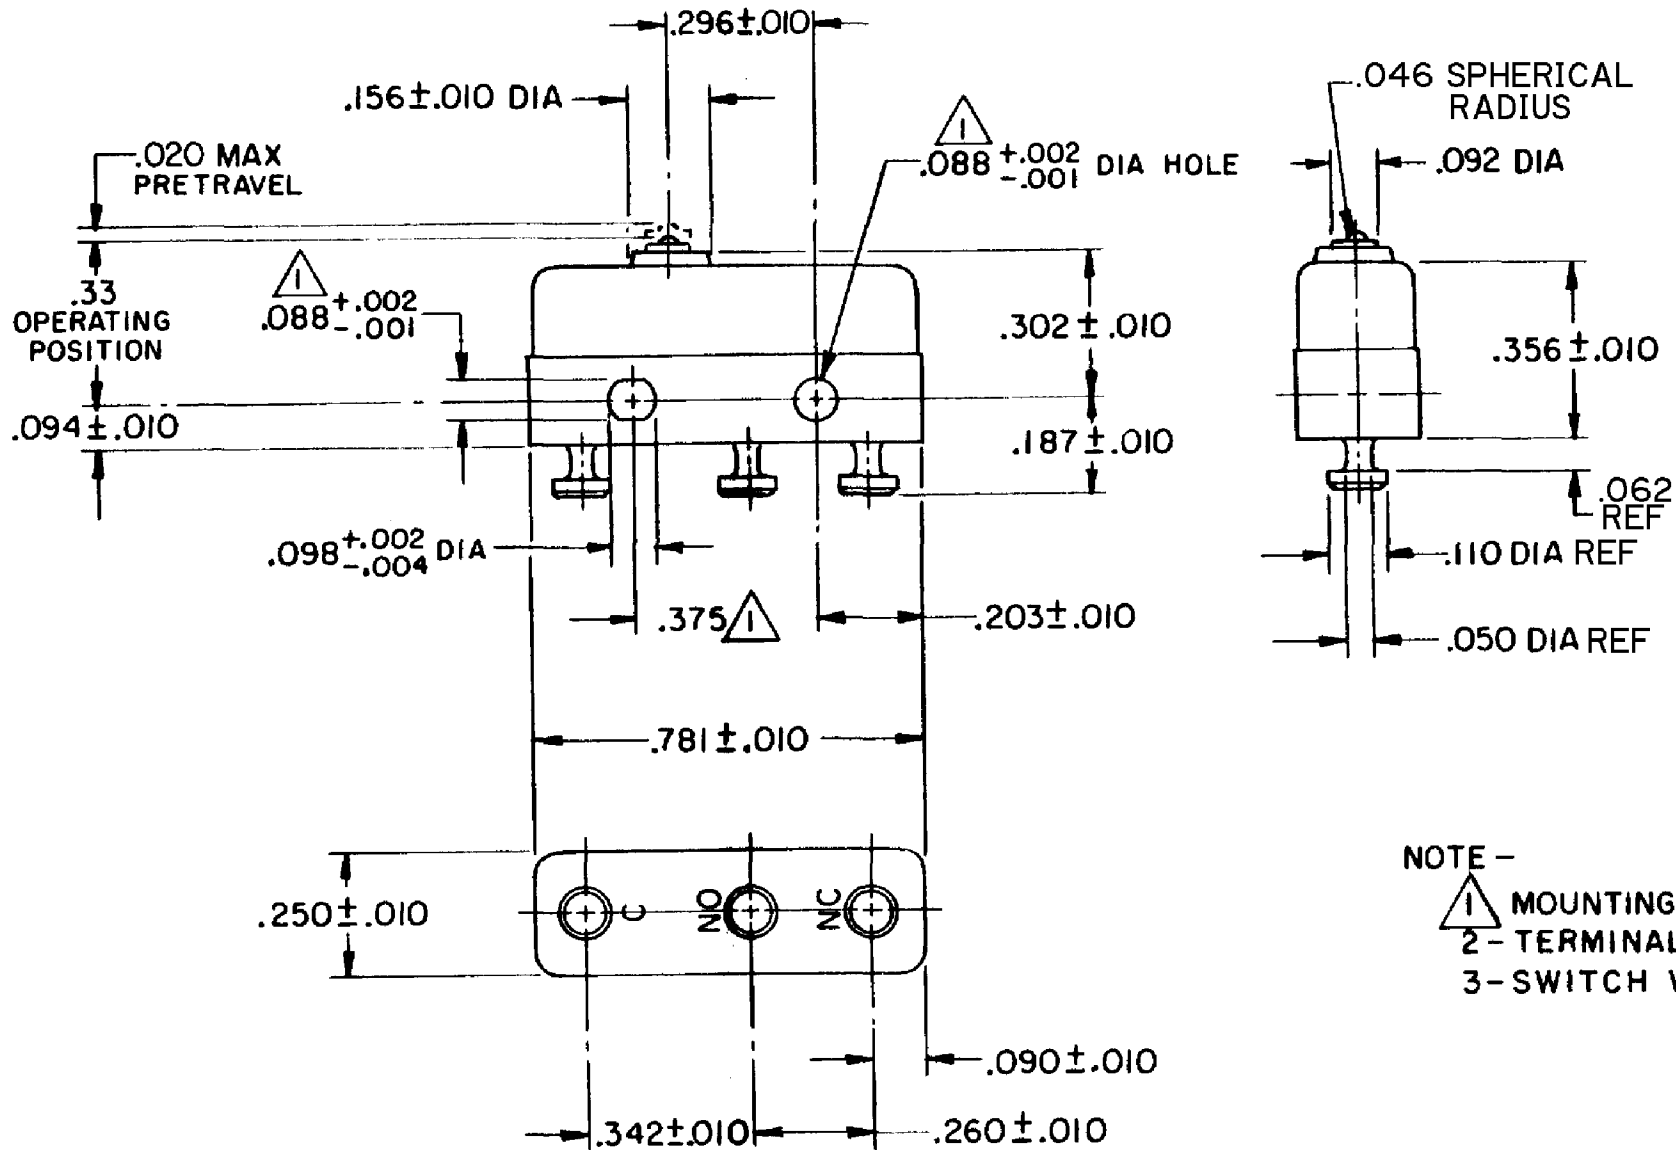



HONEYWELL PART NUMBER
11SM703-T
PRODUCT CODE TWY2009

REV	DOCUMENT	CHANGED BY	CHECK
7	0038444	KVS 09APR08	ASD

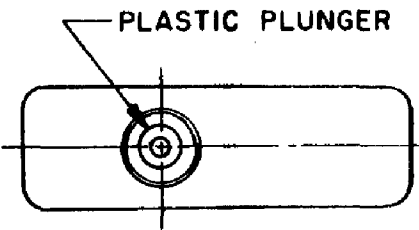

RELEASE NO. PR - 3119

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	VK	13FEB 08	Honeywell							
OPERATING FORCE — — 56 GRAM MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	13FEB 08								
RELEASE FORCE— — — 14 GRAM MIN		30 VOLTS DC RATING			0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL— — — .002 MAX			SEA LEVEL	50,000 FT		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV			
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE	3 AMP	2.5 AMP						B	I	11SM703-T		7			
		RESISTIVE	5 AMP	5 AMP						RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
		MAXIMUM INRUSH 24 AMP															
		APPROVALS															
			UL, CSA	4A, 250 VAC	 	BRAND L119											