
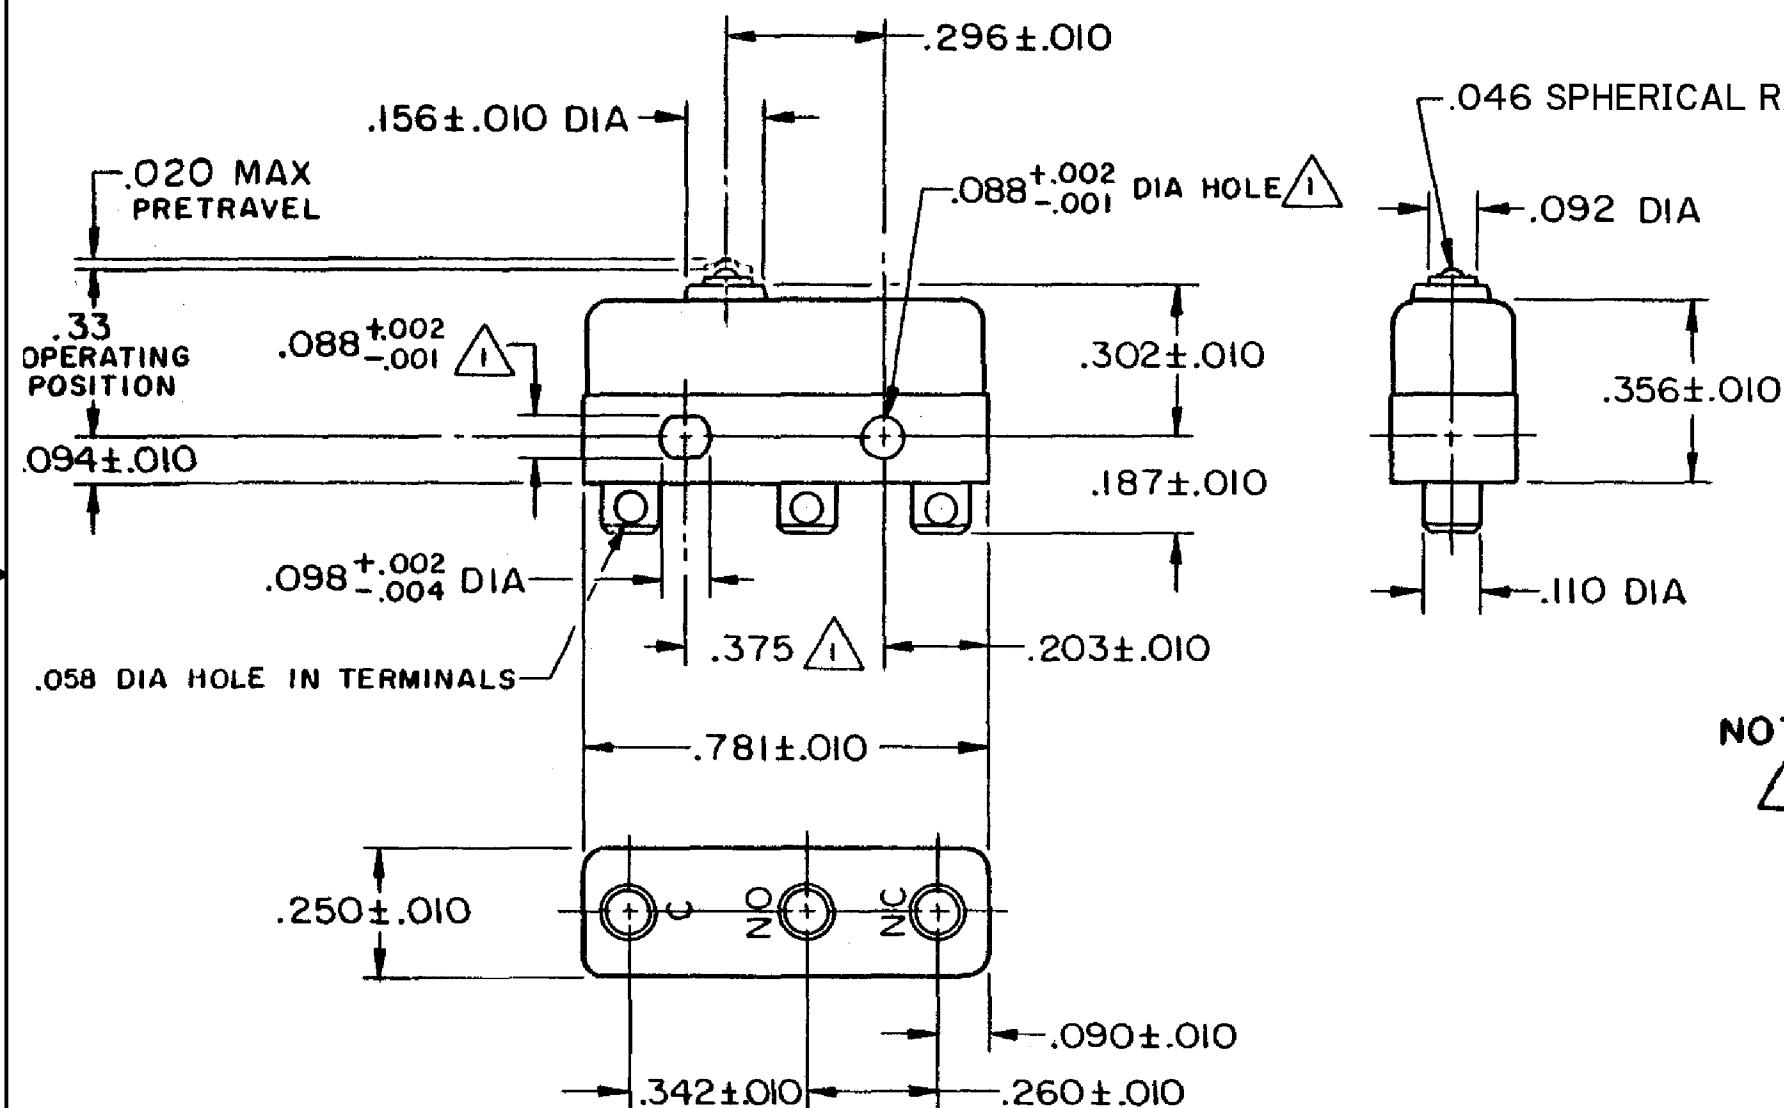


REV	DOCUMENT	CHANGED BY	CHECK
6	0038444	KVS 09APR08	ASD

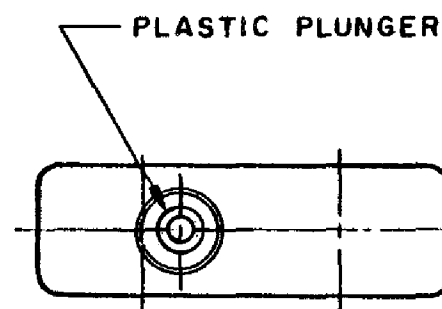

NOTE-
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .087 MAX DIA ON $.375 \pm .002$ CENTERS
 2 - TERMINALS ARE PLATED FOR SOLDERING
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°

RELEASE NO.	PR - 2959
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	06 FEB 08		Honeywell				
OPERATING FORCE – – 56 GRAM MAX		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	06 FEB 08						
RELEASE FORCE – – – 14 GRAM MIN		30 VOLTS DC RATING				NO PLACE X ±				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
		SEA LEVEL 50,000 FT				ONE PLACE .X ± 0.030												
DIFFERENTIAL TRAVEL – – – .002 MAX		INDUCTIVE 3 AMP 2.5 AMP				TWO PLACE .XX ± 0.015												
OVERTRAVEL – – – – .005 MIN		RESISTIVE 5 AMP 5 AMP				THREE PLACE .XXX ± 0.005				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
		MAXIMUM INRUSH 24 AMP				FOUR PLACE .XXXX ±								B	I	11SM703		6
		APPROVALS UL, CSA 4A, 250 VAC  BRAND L119				THIRD ANGLE PROJECTION 				RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	