


HONEYWELL
PART NUMBER

11SM711

PRODUCT CODE

TWY2012

REV	DOCUMENT	CHANGED BY	CHECK
3	0038444	KVS 09APR08	ASD

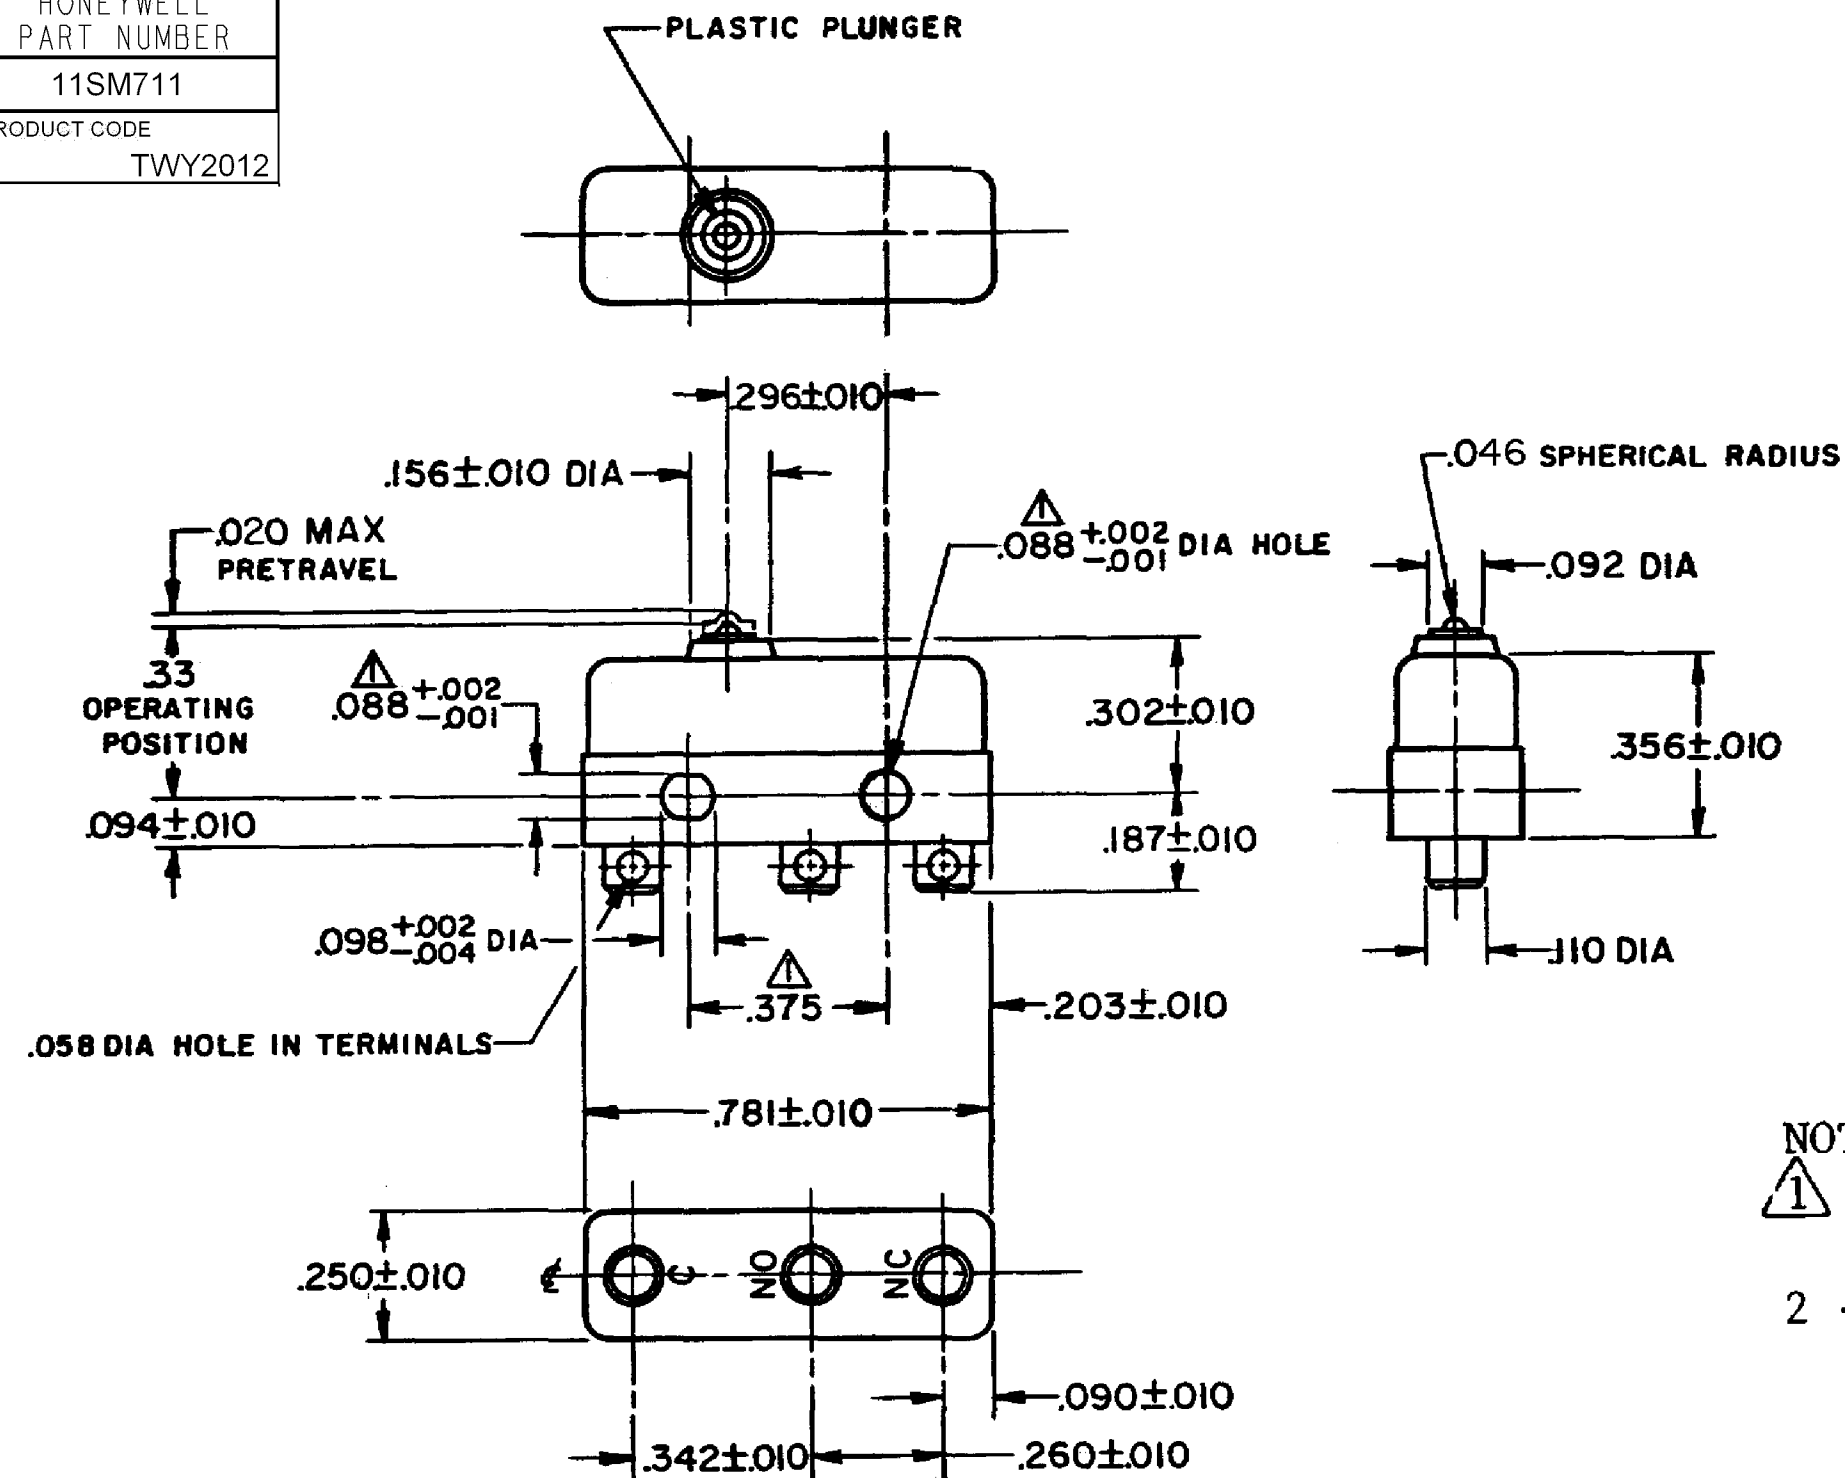

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.
PR - 14772

REPLACES

CHARACTERISTICS

OPERATING FORCE -- 56 GRAM MAX

RELEASE FORCE-- -- 14 GRAM MIN

DIFFERENTIAL TRAVEL-- -- $.002$ MAXOVERTRAVEL-- -- -- $.005$ MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

INDUCTIVE SEA LEVEL 50,000 FT

RESISTIVE 3 AMP 2.5 AMP

MAXIMUM INRUSH 24 AMP

UL, CSA 4A, 250 VAC

BRAND L119

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X $\pm$ ONE PLACE .X $\pm$ TWO PLACE .XX $\pm$ THREE PLACE .XXX $\pm$ FOUR PLACE .XXXX $\pm$ ANGLES $\pm$

THIRD ANGLE PROJECTION



DRAWN

VK

13FEB 08

CHECK

RJ

13FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

11SM711

REV

3

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1