
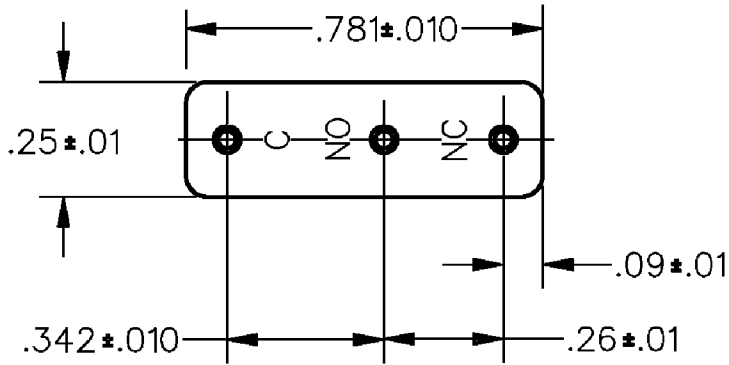
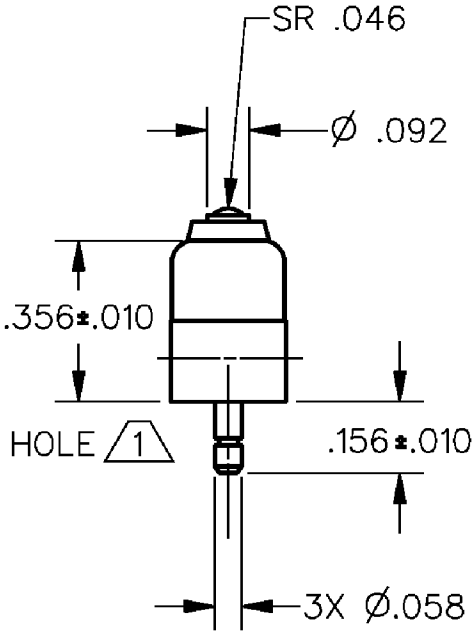
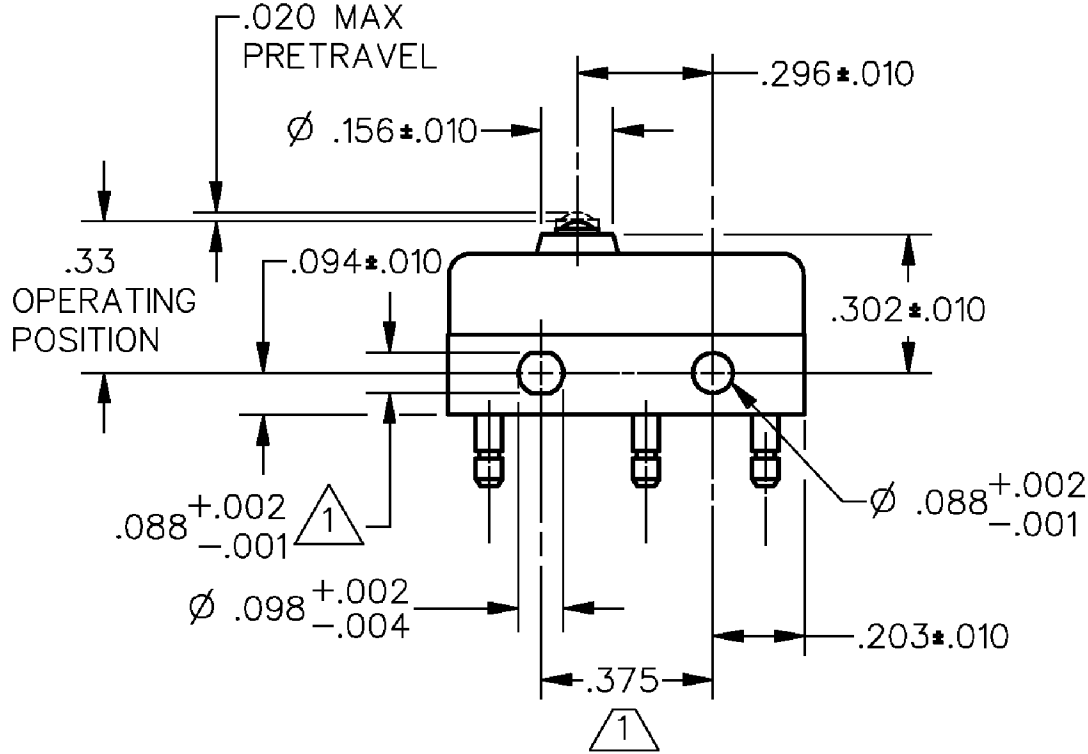


HONEYWELL
PART NUMBER
11SM712-H58
PRODUCT CODE
TWY2021

REV	DOCUMENT	CHANGED BY		CHECK
3	0079444	MBH	13JUL11	CMH

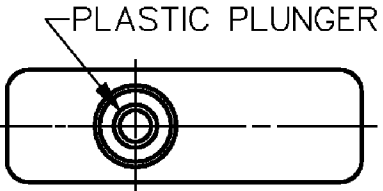

NOTES
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø .087 MAX ON .375 ±.002 CENTERS

RELEASE NO.
PR - 23411

REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	VK	27 NOV 07	Honeywell									
OPERATING FORCE – – 56 GRAM MAX		CONTACT ARRANGEMENT S P D T			TOLERANCES UNLESS NOTED:		CHECK	RJ	27 NOV 07										
RELEASE FORCE – – – 14 GRAM MIN		30 VOLTS DC RATING			NO PLACE X ± –		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC									
DIFFERENTIAL TRAVEL – – – .002 MAX					ONE PLACE .X ± .030														
OVERTRAVEL – – – – – .005 MIN		SEA LEVEL 50,000 FT			TWO PLACE .XX ± .015														
		INDUCTIVE 3 AMP 2.5 AMP			THREE PLACE .XXX ± .005														
		RESISTIVE 5 AMP 5 AMP			FOUR PLACE .XXXX ± –		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B				TYPE I		DRAWING NAME 11SM712-H58		REV 3	
		MAXIMUM INRUSH 24 AMP			ANGLES ± –														
		APPROVALS			THIRD ANGLE PROJECTION					SCALE –				WEIGHT .006 LB MAX		SHEET 1 OF 1			
		KEMA, CE 5A, 250V ~ T85 1E4  																	
		UL, CSA 5A, 250 VAC   BRAND L4																	
		UL 5A, 30 VDC  BRAND L304																	