
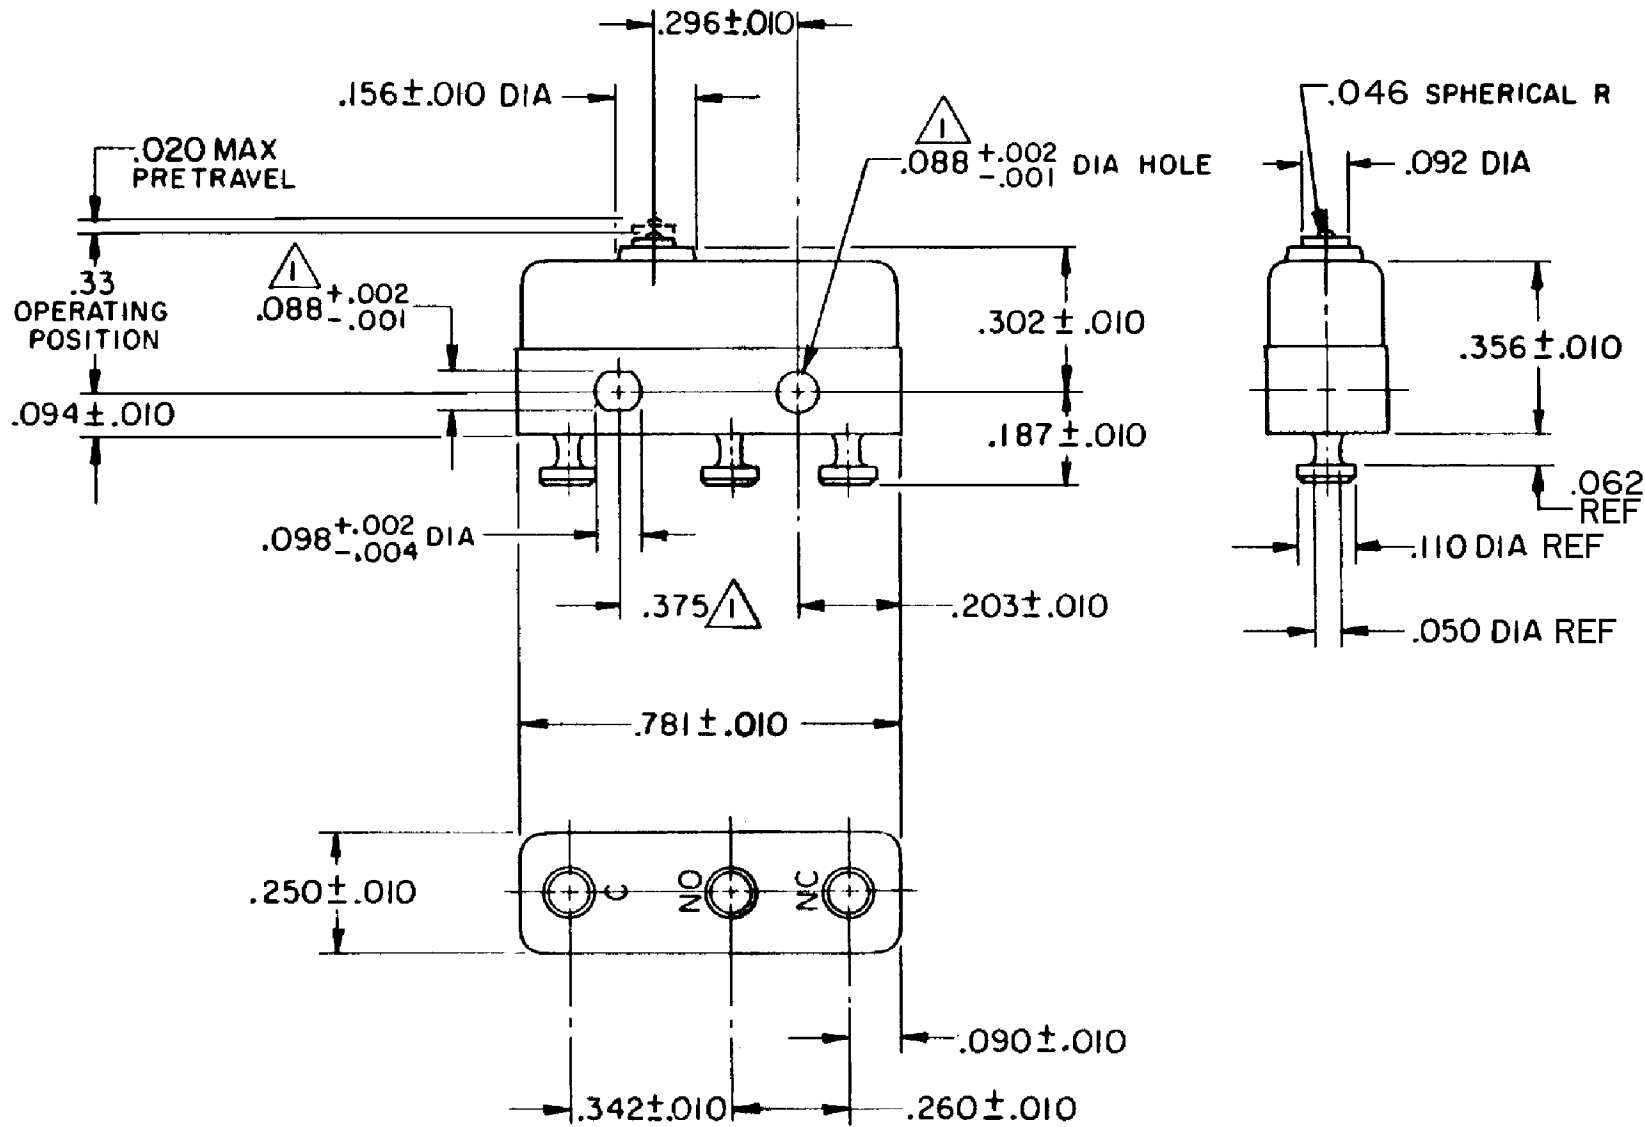


FO-55111-A

HONEYWELL
PART NUMBER
11SM723-T

PRODUCT CODE
TWY2014


REV	DOCUMENT	CHANGED BY	CHECK
6	0038224	KVS 22APR08	ASD

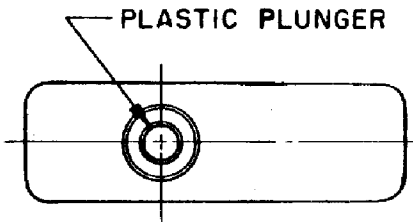

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.
PR-3858

REPLACES
-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± 0.030 0.015 0.005			DRAWN		VK		27 NOV 07		Honeywell				
OPERATING FORCE — — 56 GRAM MAX		CONTACT ARRANGEMENT SPDT						CHECK		RJ		27 NOV 07						
RELEASE FORCE— — — — 14 GRAM MIN		30 VOLTS DC RATING			0.030 0.015 0.005			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC						
DIFFERENTIAL TRAVEL— — — .002 MAX																		
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE						SEA LEVEL		50,000 FT		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						
		RESISTIVE						1 AMP		1 AMP								
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 			SIZE B				TYPE I		DRAWING NAME 11SM723-T		REV 6		
APPROVALS		KEMA, CE		1A, 250V ~ T85 1E4  														
		UL, CSA		1A, 125 VAC   BRAND L 22														
								RASTER				SCALE -		WEIGHT .006 LB MAX		SHEET 1 OF 1		