



HONEYWELL PART NUMBER
11SM77-T
PRODUCT CODE TWT7760

REV	DOCUMENT	CHANGED BY	CHECK
10	0038091	VS 28APR08	BLR

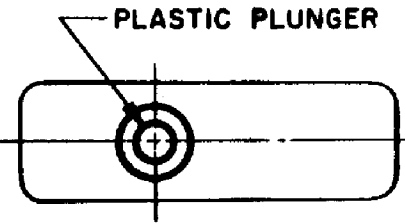

PLASTIC PLUNGER

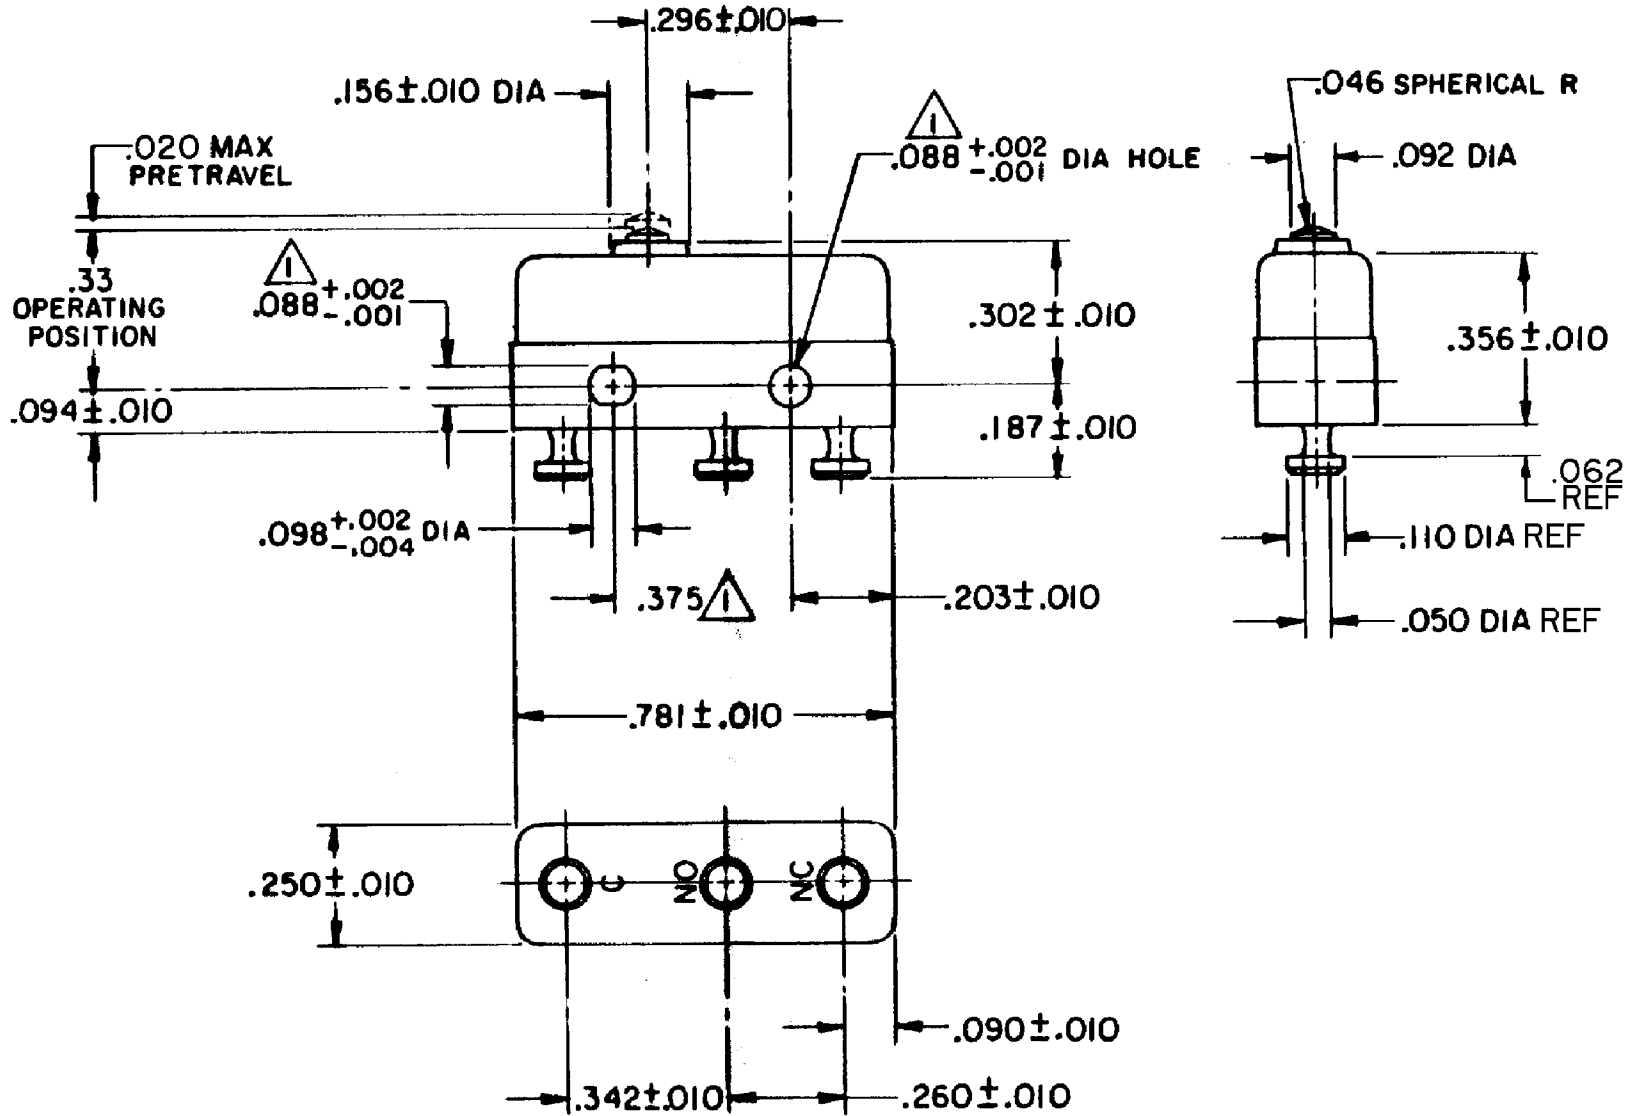

NOTE -
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ± .002 CENTERS
2- TERMINALS ARE PLATED FOR SOLDERING
3- MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY
4- SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	VK	27 NOV 07		Honeywell					
OPERATING FORCE — — — — 3 - 5 OZ		CONTACT ARRANGEMENT SPDT								CHECK	RJ	27 NOV 07							
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING								THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.									
DIFFERENTIAL TRAVEL— — — .004 MAX																			
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE				SEA LEVEL	50,000 FT	TITLE SWITCH - BASIC											
		RESISTIVE				1/2 AMP	1/2 AMP												
		MAXIMUM INRUSH 2 AMP				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY													
		APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4		CE	SIZE B												
			UL, CSA	1A, 125 VAC		BRAND L 22							TYPE I	DRAWING NAME 11SM77-T			REV 10		
						SCALE -						WEIGHT .006 LB MAX		SHEET 1 OF 1					