
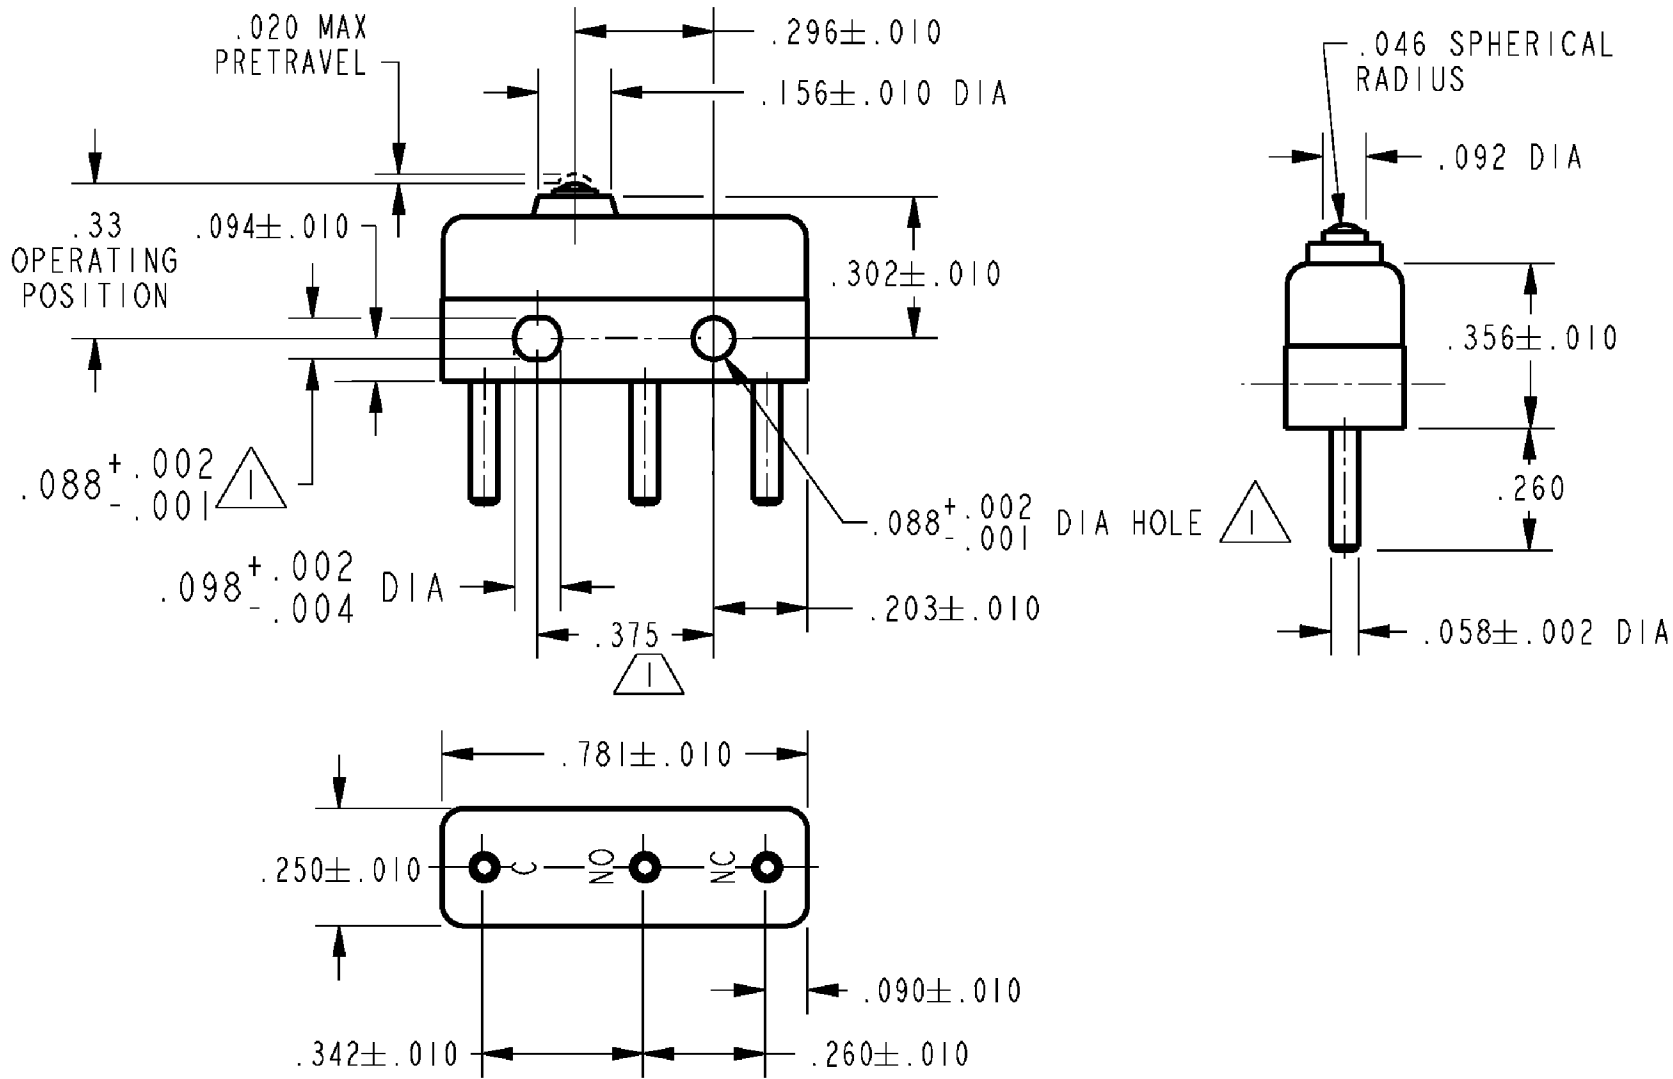


HONEYWELL PART NUMBER
11SM8423-H2
PRODUCT CODE TWZ5075
JG80659

REV	DOCUMENT	CHANGED BY	CHECK
3	0038224	KVS 22APR08	ASD

PLASTIC PLUNGER

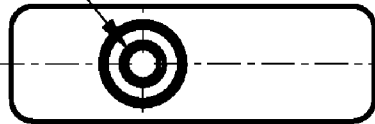

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - PROJECTION STYLE GOLD OVER SILVER CONTACTS

RELEASE NO.	PR - 19064
REPLACES	X91860

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±			DRAWN	VK	27 NOV 07		Honeywell				
OPERATING FORCE — — — 3 1/2 OZ		CONTACT ARRANGEMENT SPDT						CHECK	RJ	27 NOV 07						
RELEASE FORCE— — — — 1 OZ MIN		30 VOLTS DC RATING			0.030 0.015 0.005			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .001 MAX			SEA LEVEL	50,000 FT												
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE	3 AMP	2.5 AMP	THIRD ANGLE PROJECTION 			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
		RESISTIVE	5 AMP	5 AMP								B	I	11SM8423-H2		3
		MAXIMUM INRUSH 24 AMP						RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4									UL, CSA	5A, 250 VAC		BRAND L4