


|     |          |             |       |
|-----|----------|-------------|-------|
| REV | DOCUMENT | CHANGED BY  | CHECK |
| 2   | 0038224  | KVS 22APR08 | ASD   |

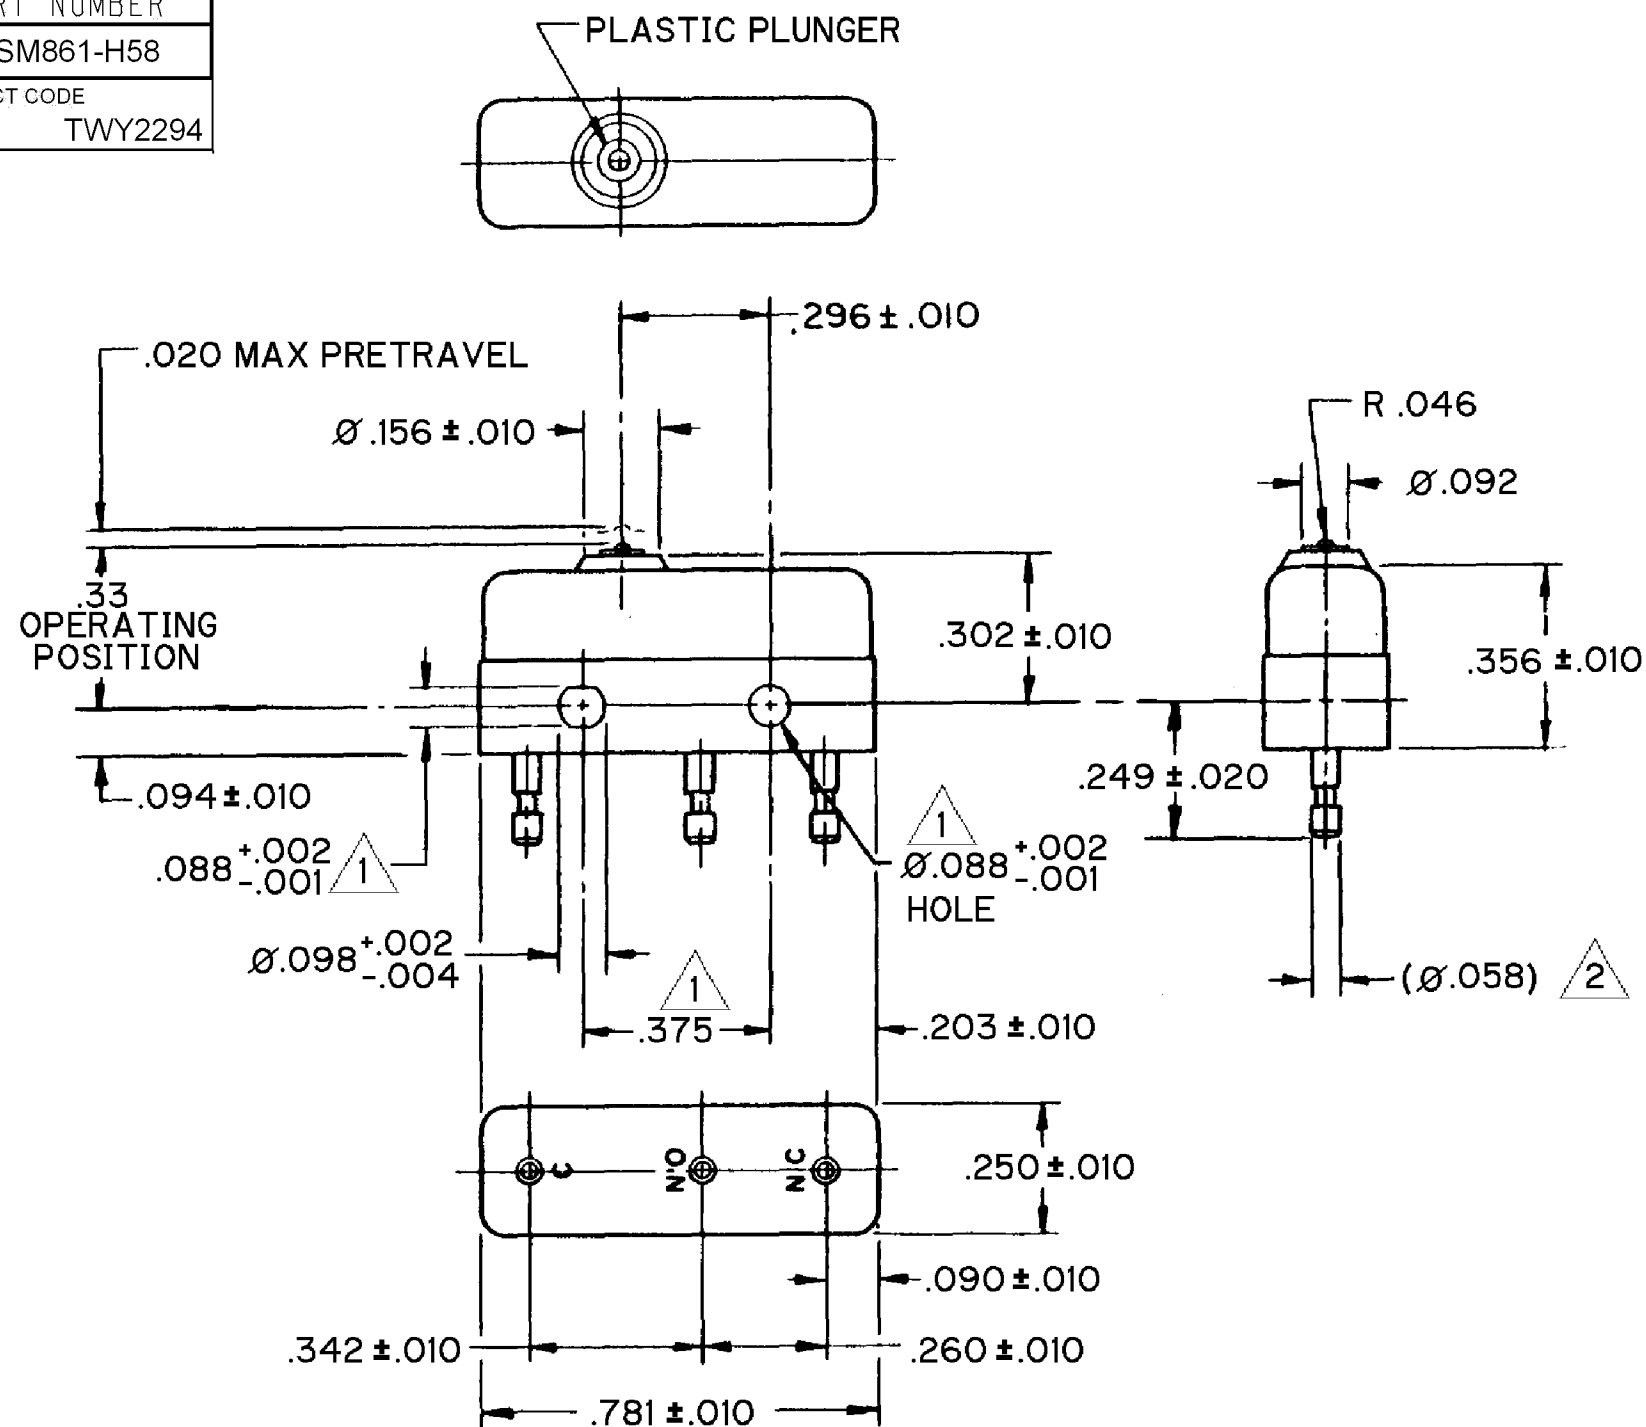

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375 ±.002 CENTERS
- 2 PLATED TERMINALS WILL ACCEPT "AMP INC" Ø.058 PIN RECEPTACLES

|             |              |
|-------------|--------------|
| RELEASE NO. | PR - 22853   |
| REPLACES    | X101925 - SM |

|                                   |  |                                |          |                    |  |                                                                                      |                                                                                       |                        |                                                                                       |                                                                                                                                                                 |    |           |        |                             |      |              |         |                    |              |  |
|-----------------------------------|--|--------------------------------|----------|--------------------|--|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-----------|--------|-----------------------------|------|--------------|---------|--------------------|--------------|--|
| CHARACTERISTICS                   |  | ELECTRICAL DATA                |          |                    |  | DESIGN UNITS: INCH                                                                   |                                                                                       |                        |                                                                                       | DRAWN                                                                                                                                                           | VK | 27 NOV 07 |        | <div>Honeywell</div>        |      |              |         |                    |              |  |
| OPERATING FORCE — — — — 2 - 7 OZ  |  | CONTACT ARRANGEMENT<br>S P D T |          |                    |  | TOLERANCES UNLESS NOTED:                                                             |                                                                                       |                        |                                                                                       | CHECK                                                                                                                                                           | RJ | 27 NOV 07 |        |                             |      |              |         |                    |              |  |
| RELEASE FORCE— — — — — 1 OZ MIN   |  | 30 VOLTS DC RATING             |          |                    |  | NO PLACE X ±                                                                         |                                                                                       |                        |                                                                                       | THIS DRAWING COVERS A PROPRIETARY ITEM<br>AND IS THE PROPERTY OF HONEYWELL.<br>THIS DRAWING IS NOT TO BE COPIED OR USED<br>WITHOUT THE PERMISSION OF HONEYWELL. |    |           |        | TITLE<br><br>SWITCH - BASIC |      |              |         |                    |              |  |
|                                   |  | SEA LEVEL 50,000 FT            |          |                    |  | ONE PLACE .X ± 0.030                                                                 |                                                                                       |                        |                                                                                       |                                                                                                                                                                 |    |           |        |                             |      |              |         |                    |              |  |
| DIFFERENTIAL TRAVEL— — — .004 MAX |  | INDUCTIVE                      |          | 3 AMP 2.5 AMP      |  | TWO PLACE .XX ± 0.015                                                                |                                                                                       |                        |                                                                                       |                                                                                                                                                                 |    |           |        |                             |      |              |         |                    |              |  |
| OVERTRAVEL — — — — — .005 MIN     |  | RESISTIVE                      |          | 5 AMP 5 AMP        |  | THREE PLACE .XXX ± 0.005                                                             |                                                                                       |                        |                                                                                       |                                                                                                                                                                 |    |           |        |                             |      |              |         |                    |              |  |
|                                   |  | MAXIMUM INRUSH 24 AMP          |          |                    |  | FOUR PLACE .XXXX ±                                                                   |                                                                                       |                        |                                                                                       | INTERPRET PER ANSI Y14.5M-1982<br>OTHER HONEYWELL ENGINEERING<br>STANDARDS MAY APPLY                                                                            |    |           |        | SIZE                        | TYPE | DRAWING NAME |         | REV                |              |  |
|                                   |  | APPROVALS                      | KEMA, CE | 5A, 250V ~ T85 1E4 |  |  |  | THIRD ANGLE PROJECTION |                                                                                       |                                                                                                                                                                 |    |           |        | B                           | I    | 11SM861-H58  |         | 2                  |              |  |
|                                   |  |                                | UL, CSA  | 5A, 250 VAC ~      |  |   |   | BRAND L4               |  |                                                                                                                                                                 |    |           | RASTER |                             |      |              | SCALE - | WEIGHT .006 LB MAX | SHEET 1 OF 1 |  |