


REV	DOCUMENT	CHANGED BY	CHECK
4	0038224	KVS 22APR08	ASD

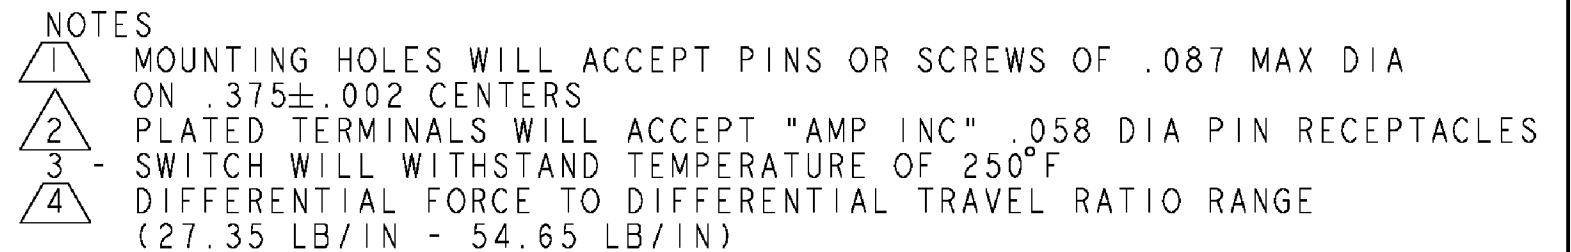

RELEASE NO.	PR - 16976
REPLACES	-

CHARACTERISTICS 		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	27 NOV 07		Honeywell				
OPERATING FORCE – – – – 3 - 5 OZ		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	27 NOV 07						
RELEASE FORCE – – – – – 1 OZ MIN		30 VOLTS DC RATING				NO PLACE X ±				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
		SEA LEVEL 50,000 FT				ONE PLACE .X ± 0.030												
DIFFERENTIAL TRAVEL – – – .004 MAX		INDUCTIVE	3 AMP	2.5 AMP	TWO PLACE .XX ± 0.015													
OVERTRAVEL – – – – – .005 MIN		RESISTIVE	5 AMP	5 AMP	THREE PLACE .XXX ± 0.005													
		MAXIMUM INRUSH 24 AMP				FOUR PLACE .XXXX ±				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4			THIRD ANGLE PROJECTION 				B					I	11SM8849-H58		4	
	UL, CSA	5A, <u>250</u> VAC								BRAND L4								
										RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	