
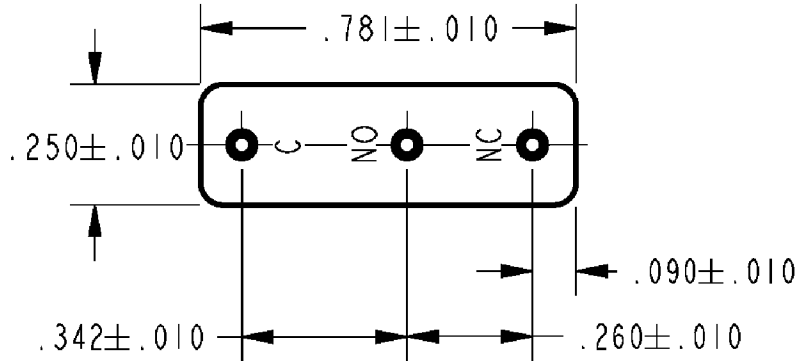
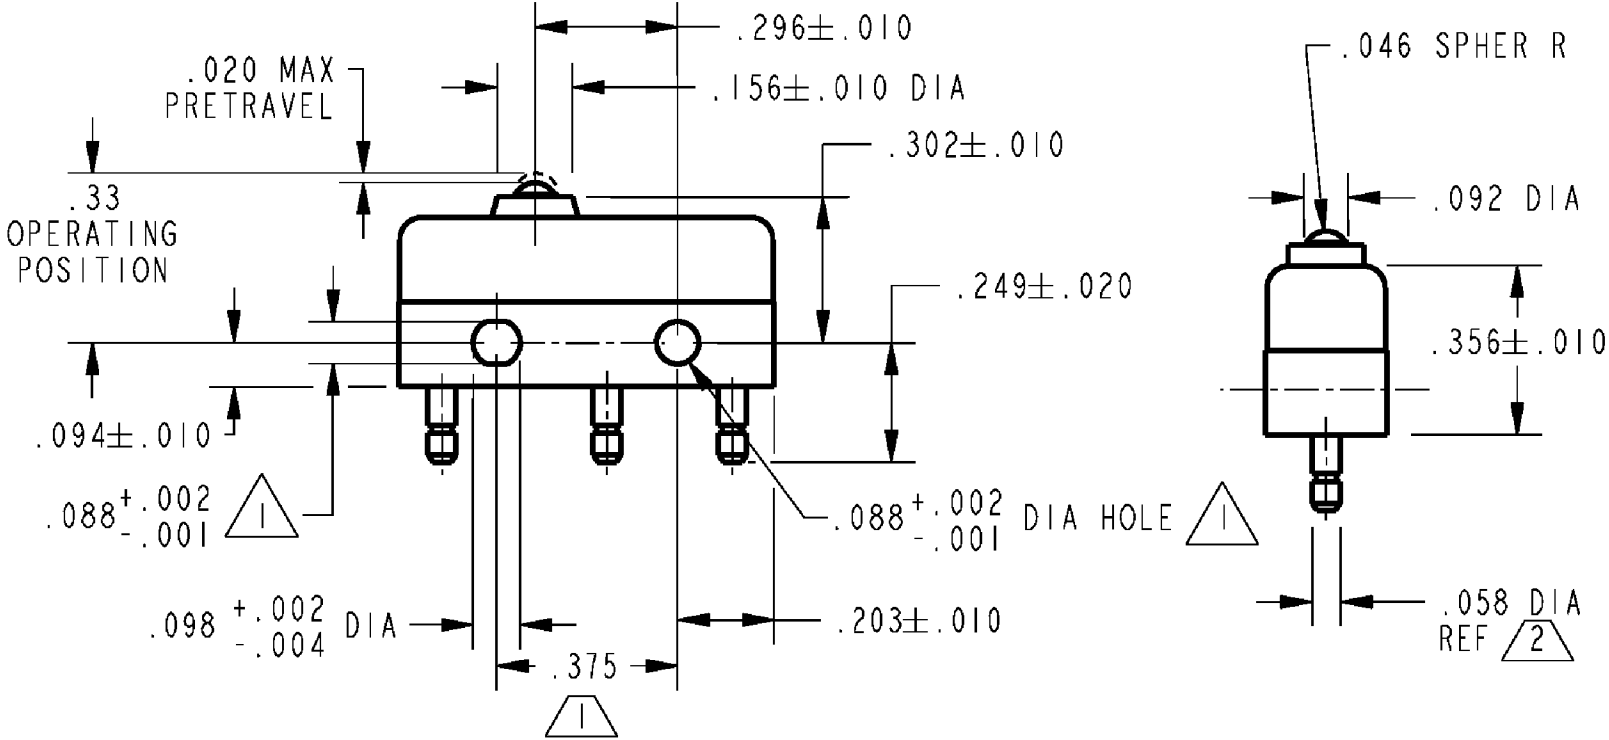


HONEYWELL PART NUMBER
11SM8850-H58
PRODUCT CODE TWZ5252

REV	DOCUMENT	CHANGED BY	CHECK
4	0038224	KVS 22APR08	ASD

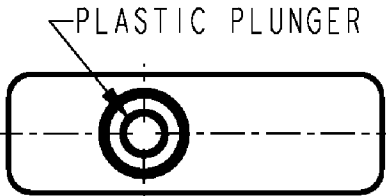

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
 - 2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
 - 3 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 4 DIFFERENTIAL FORCE TO DIFFERENTIAL TRAVEL RATIO RANGE (27.35 LB/IN - 54.65 LB/IN)

RELEASE NO. PR - 19179

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN		VK		27 NOV 07		Honeywell							
OPERATING FORCE — — — — 3 - 5 OZ		CONTACT ARRANGEMENT SPDT		TOLERANCES UNLESS NOTED:		CHECK		RJ		27 NOV 07									
RELEASE FORCE — — — — 1 OZ MIN		30 VOLTS DC RATING		NO PLACE X ±		0.030 0.015 0.005		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL — — — .004 MAX		SEA LEVEL 50,000 FT		ONE PLACE .X ±															
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE 3 AMP 2.5 AMP		TWO PLACE .XX ±															
		RESISTIVE 5 AMP 5 AMP		THREE PLACE .XXX ±															
		MAXIMUM INRUSH 24 AMP		FOUR PLACE .XXXX ±				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE		TYPE		DRAWING NAME		REV	
		APPROVALS		THIRD ANGLE PROJECTION		B						I		11SM8850-H58		4			
		KEMA, CE		5A, 250V ~ T85 1E4				RASTER				SCALE		-		WEIGHT .006 LB MAX		SHEET 1 OF 1	
		UL, CSA		5A, 250 VAC															