


REV	DOCUMENT	CHANGED BY	CHECK
8	0038091	VS 28APR08	BLR

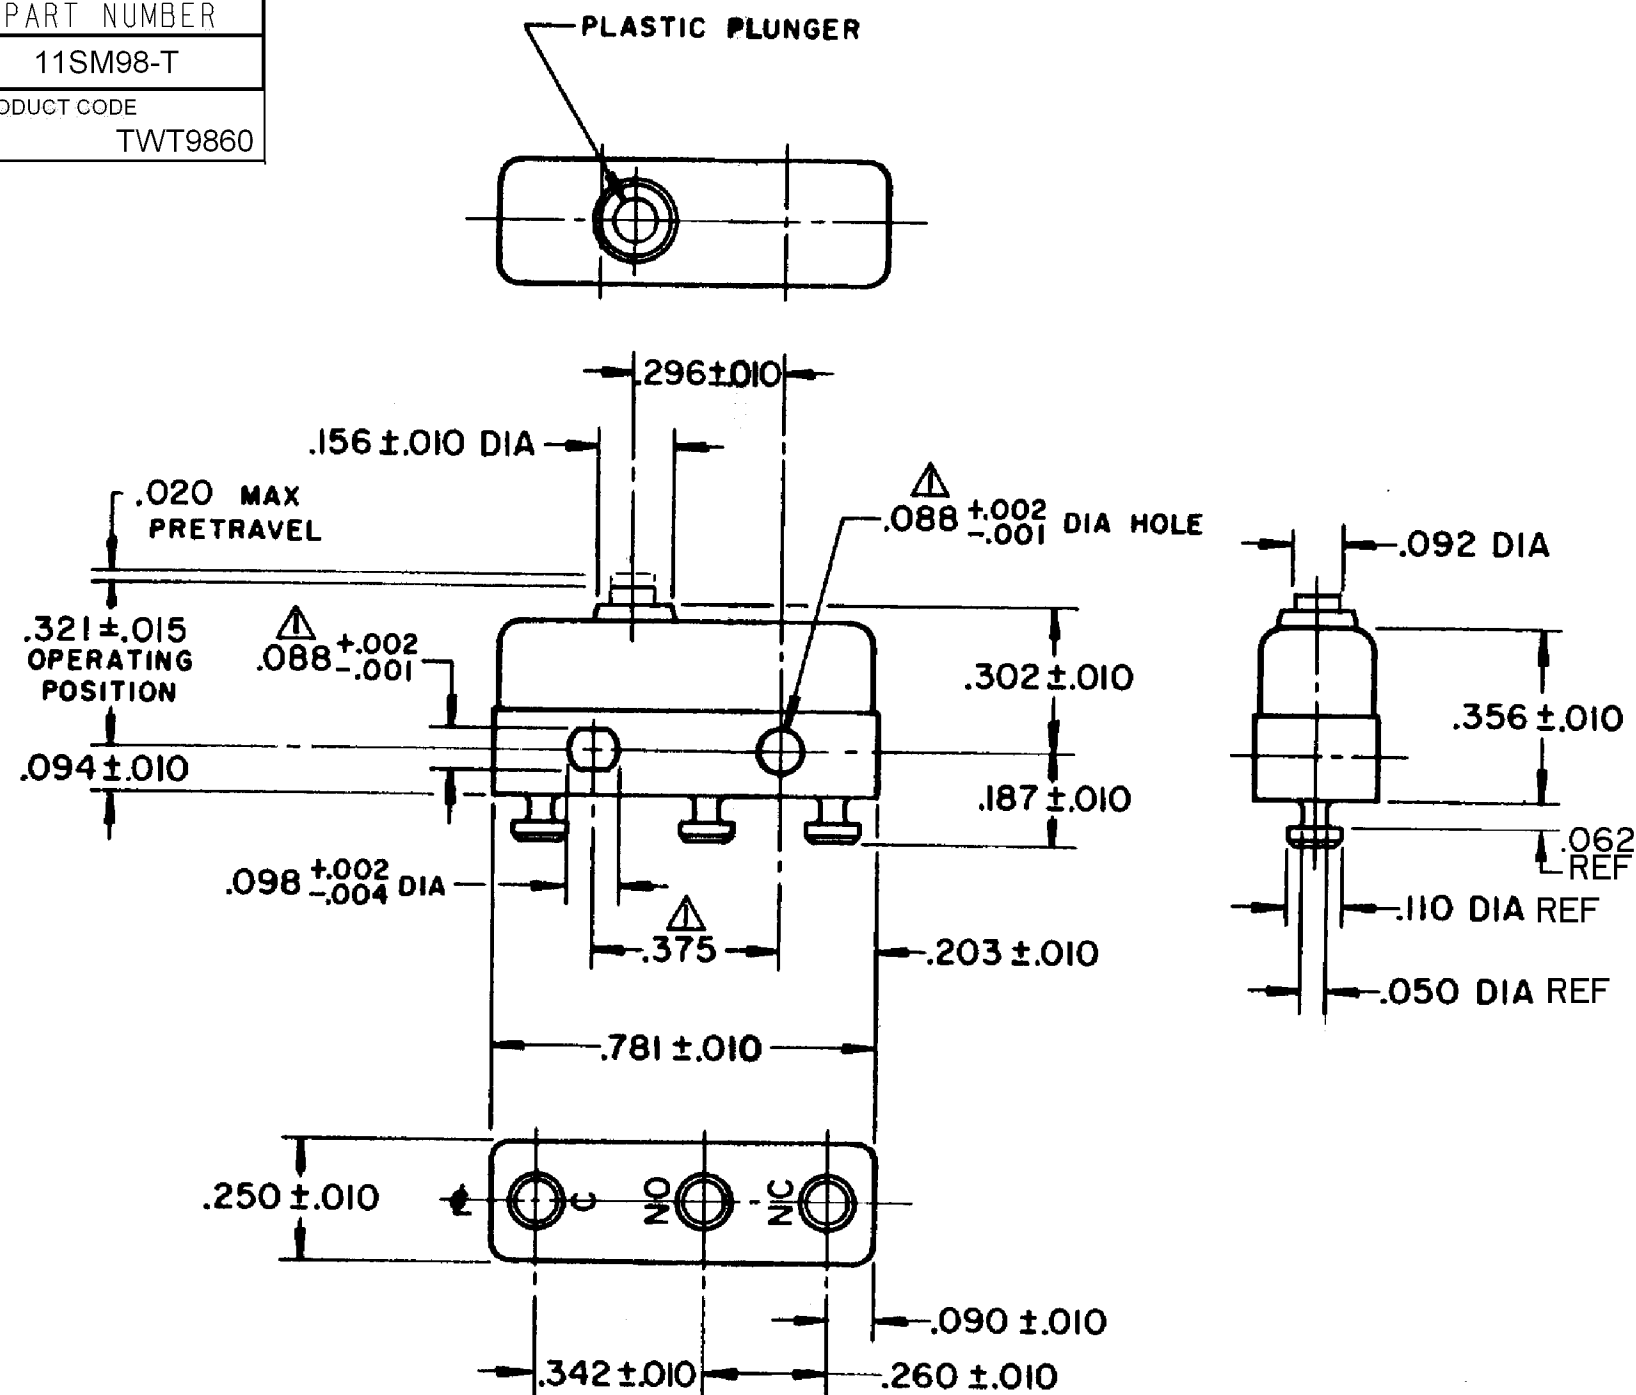

NOTE -
⚠-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	VK	27 NOV 07	Honeywell				
OPERATING FORCE — — — — 3 - 5 OZ		CONTACT ARRANGEMENT S P D T					CHECK	RJ	27 NOV 07					
RELEASE FORCE— — — — — 1 OZ MIN		30 VOLTS DC RATING					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .004 MAX														
OVERTRAVEL — — — — — .005 MIN		INDUCTIVE					SEA LEVEL	50,000 FT	3 AMP	2.5 AMP	5 AMP	5 AMP		
		RESISTIVE					MAXIMUM INRUSH 24 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4		UL, CSA	5A, 250 VAC		BRAND L4	B	I	11SM98-T		8
					THIRD ANGLE PROJECTION 		RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	