


REV	DOCUMENT	CHANGED BY	CHECK
10	0038091	VS 28APR08	BLR

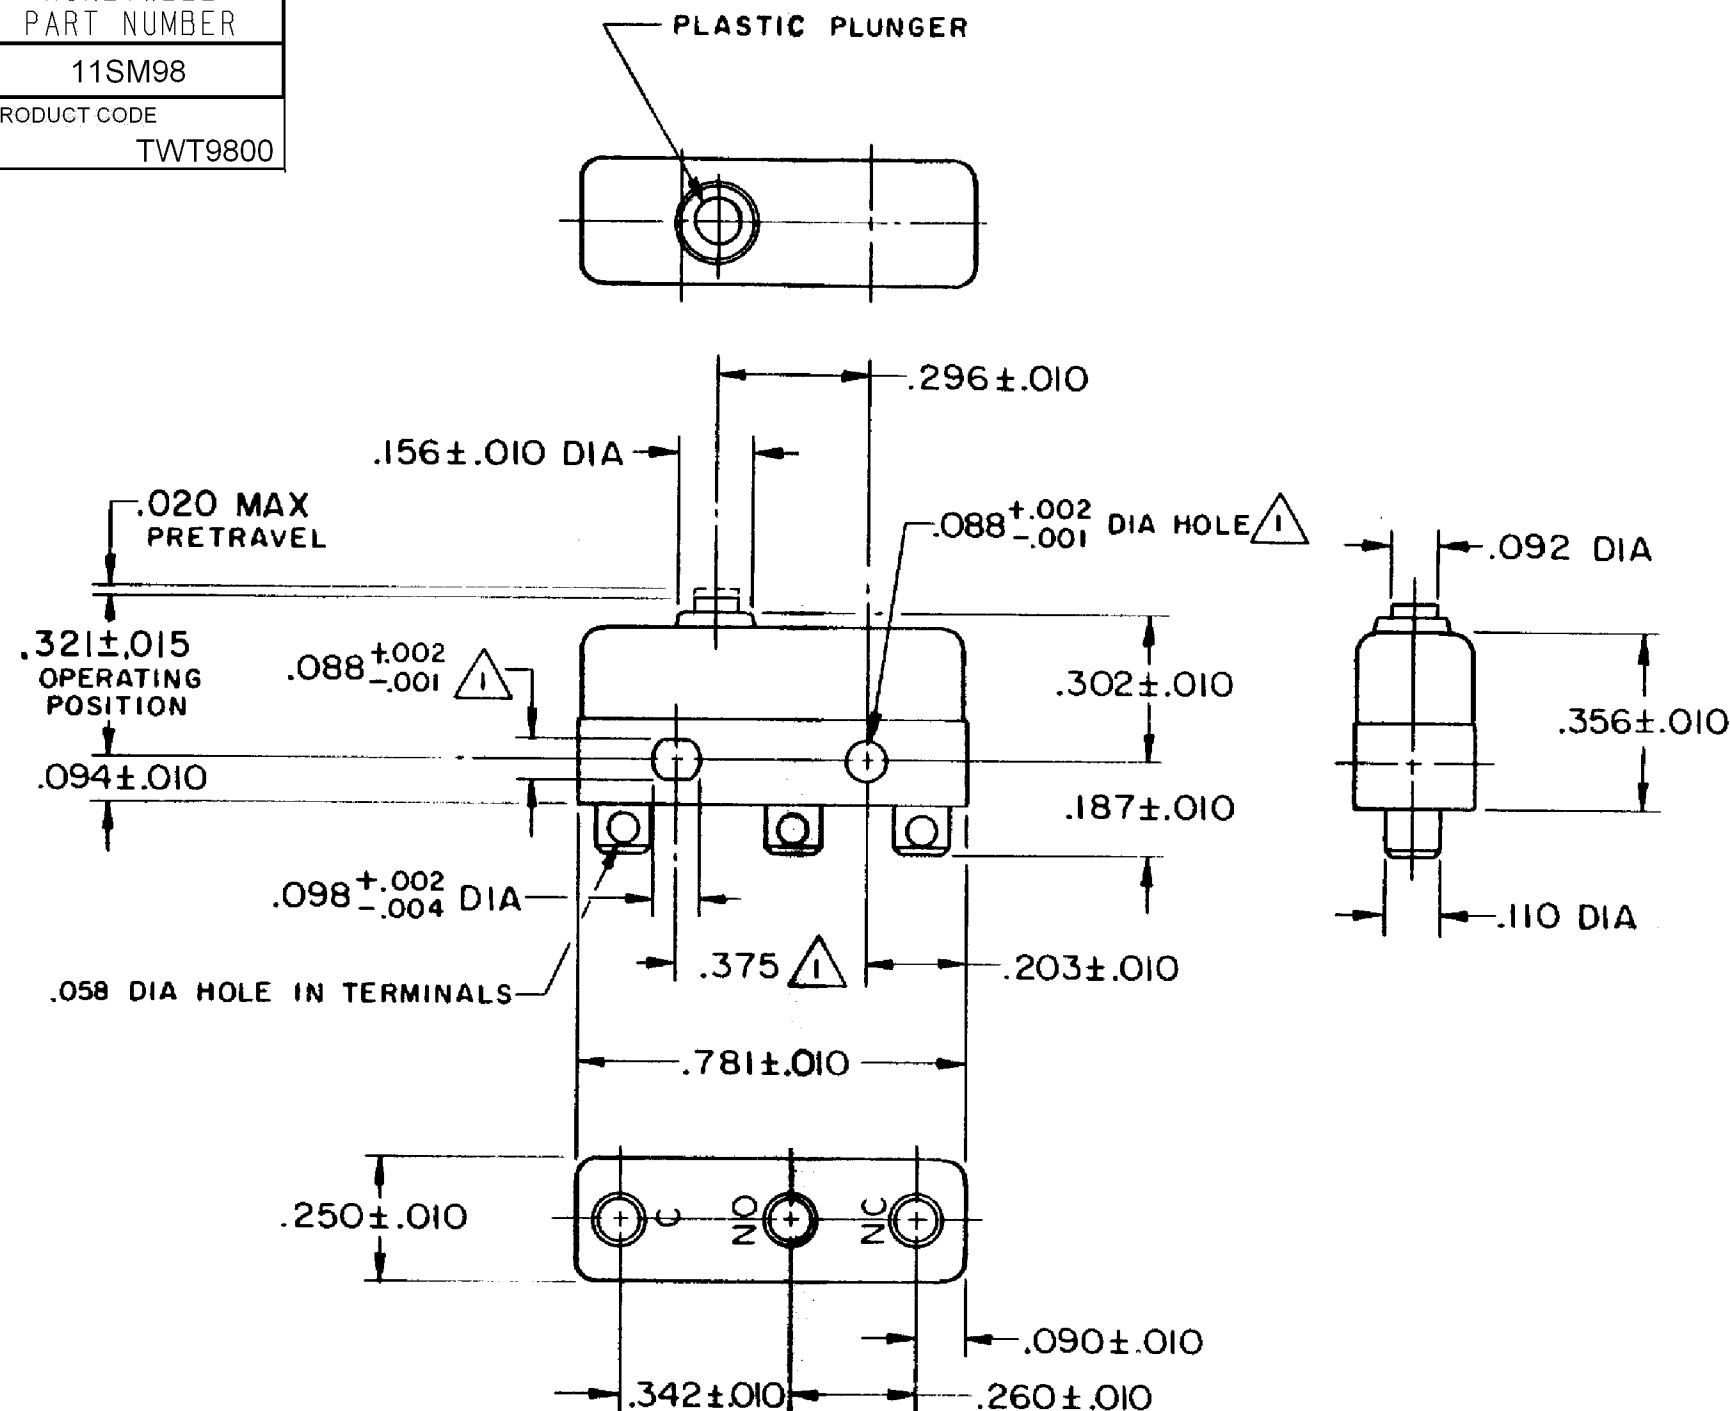

NOTE -

 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON $.375 \pm .002$ CENTERS

2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	-
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	27 NOV 07		Honeywell				
OPERATING FORCE — — — — 3-5 OZ		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	27 NOV 07						
RELEASE FORCE— — — — — 1 OZ MIN		30 VOLTS DC RATING				NO PLACE X ±				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
						ONE PLACE .X ± 0.030												
DIFFERENTIAL TRAVEL— — — .004 MAX		INDUCTIVE				TWO PLACE .XX ± 0.015												
OVERTRAVEL — — — — — .005 MIN		RESISTIVE				THREE PLACE .XXX ± 0.005												
		MAXIMUM INRUSH 24 AMP				FOUR PLACE .XXXX ±				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
APPROVALS		KEMA, CE	5A, 250V ~ T85 1E4				THIRD ANGLE PROJECTION							B	I	11SM98		10
		UL, CSA	5A, 250 VAC				BRAND L4											
										RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET	1 OF 1