
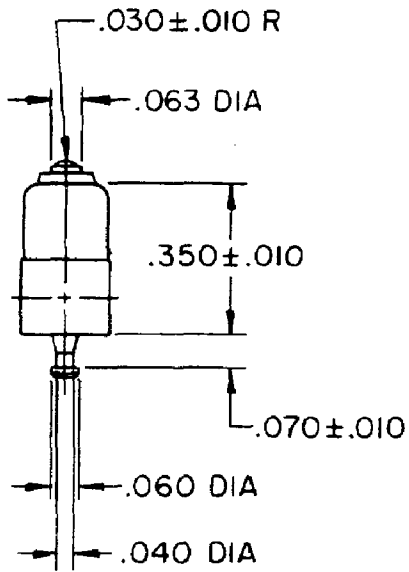
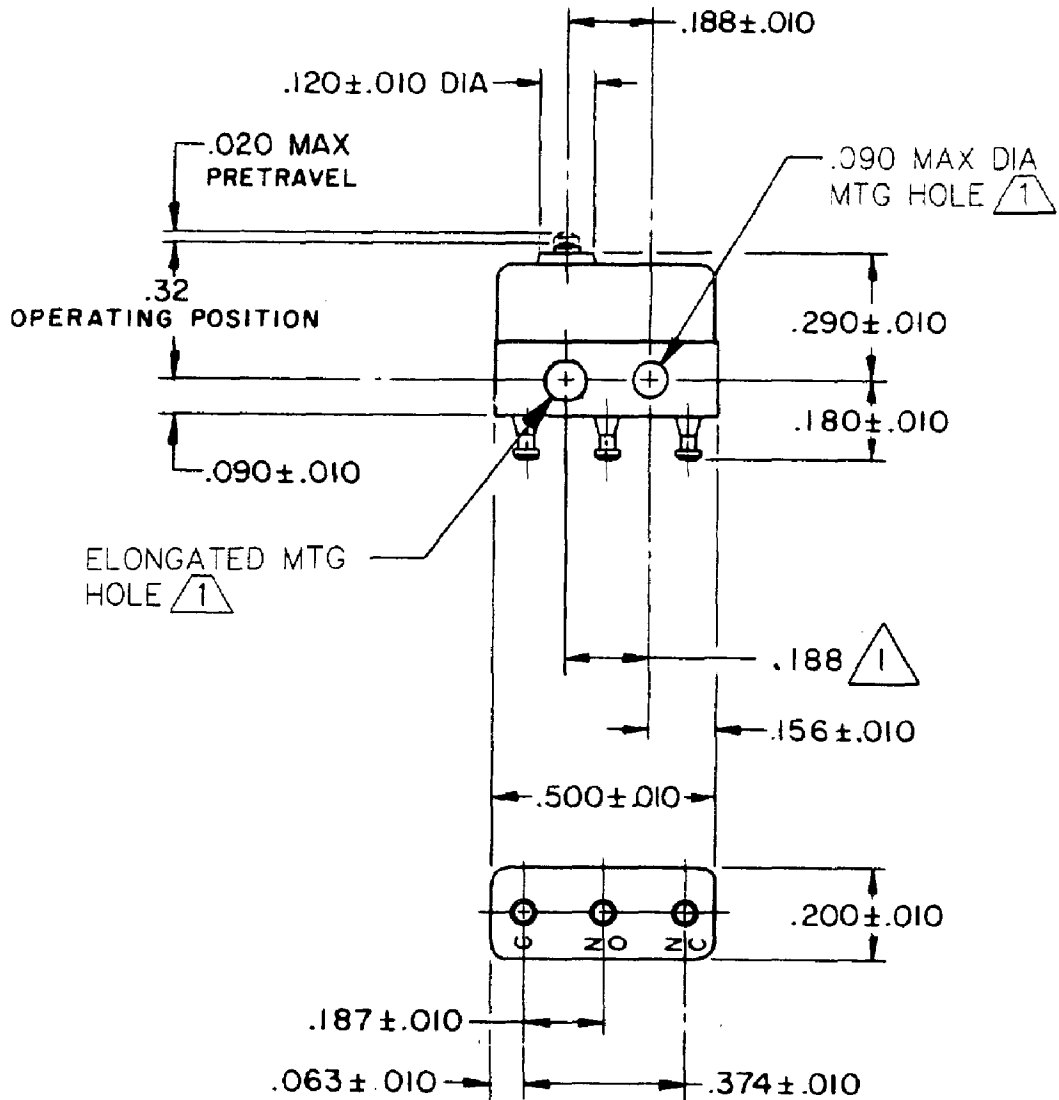


HONEYWELL PART NUMBER
11SX22-T
PRODUCT CODE
VDJ2120

REV	DOCUMENT	CHANGED BY	CHECK
11	0038448	VS 28APR08	BLR

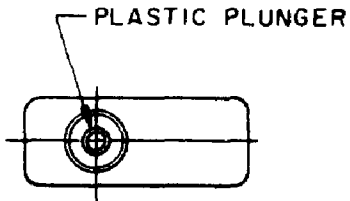

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR-5481
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	SPK	08FEB08	Honeywell			
OPERATING FORCE — — — 2.5 - 5 OZ		CONTACT ARRANGEMENT S P D T								CHECK	RJ	08FEB08				
RELEASE FORCE— — — — — 1 OZ MIN			28 VOLTS DC RATING		115 VOLTS AC, 60 CPS		0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
			SEA LEVEL	50,000 FT	SEA LEVEL											
DIFFERENTIAL TRAVEL— — — .002 MAX		INDUCTIVE	3 AMP	2 AMP	5 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
OVERTRAVEL — — — — — .004 MIN		RESISTIVE	5 AMP	4 AMP	5 AMP							B	I	11SX22-T		11
		APPROVALS	KEMA, CE	5A 250 V ~ T125	5E4							SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1	
			UL, CSA	5A 250 VAC			BRAND L4L									