




HONEYWELL PART NUMBER
11SX27
PRODUCT CODE VDJ2167
JG-83575

REV	DOCUMENT	CHANGED BY	CHECK
4	0038448	VS 28APR08	BLR

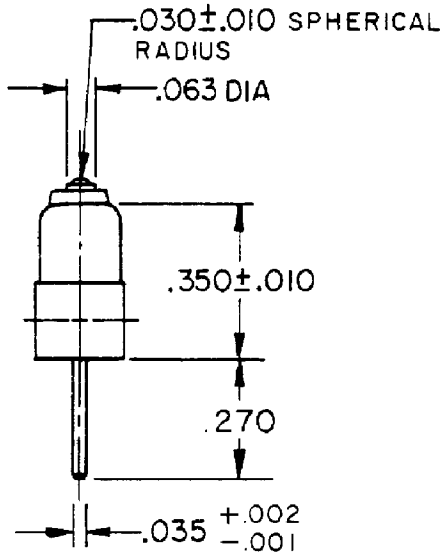


B

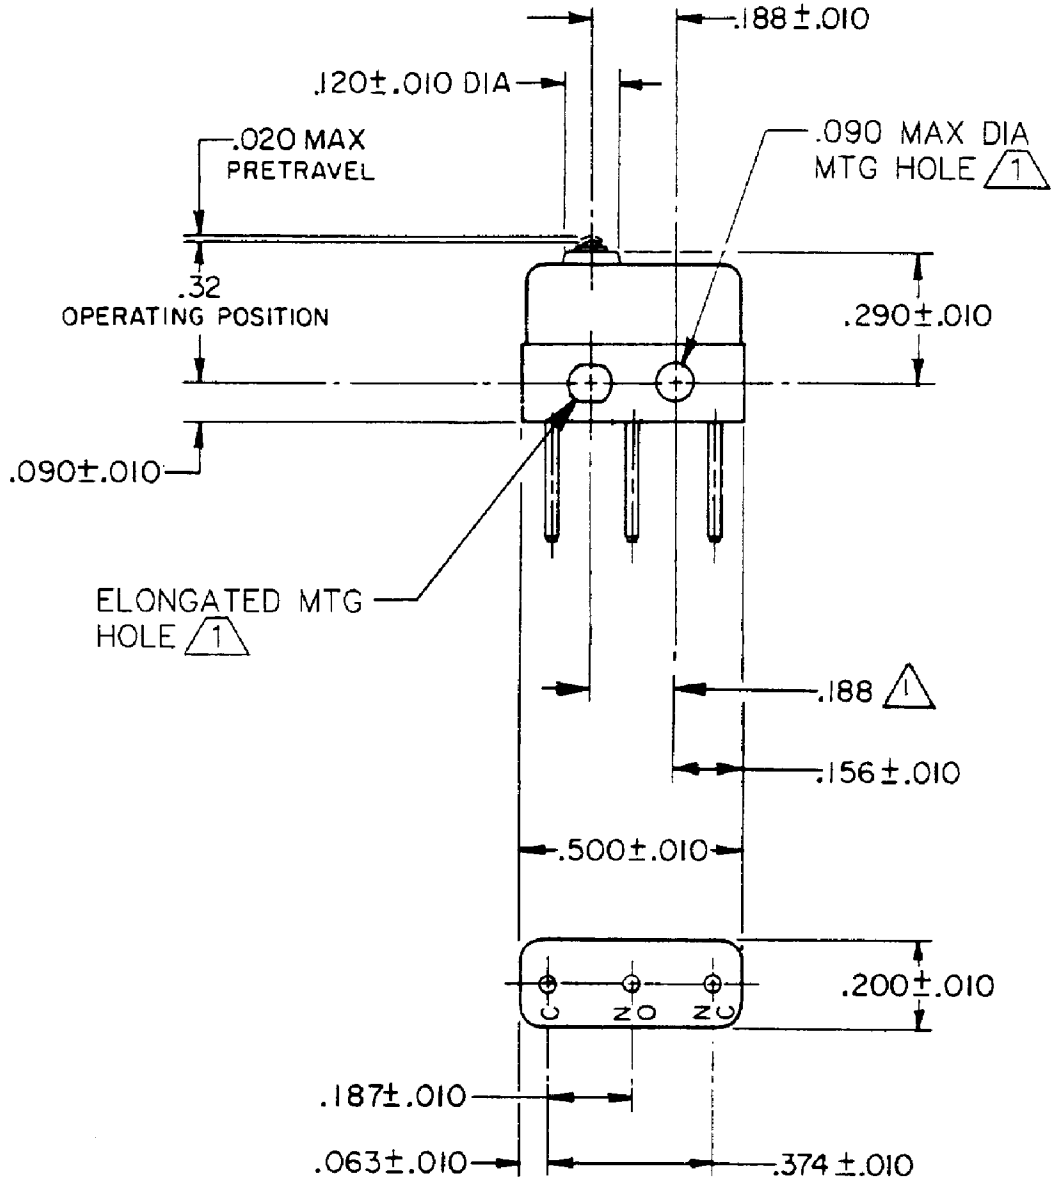

- NOTE -
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2- TERMINALS ARE PLATED FOR SOLDERING
 - 3- SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR-6744
REPLACES	X67094-SX

A

CHARACTERISTICS			ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±			DRAWN	VK	05 MAR 08	Honeywell				
OPERATING FORCE — — 2.5 - 5 OZ			CONTACT ARRANGEMENT SPDT					CHECK	RJ	05 MAR 08					
RELEASE FORCE— — — — 1 OZ MIN					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SIZE	TYPE	DRAWING NAME 11SX27			REV 4		
DIFFERENTIAL TRAVEL— — — .002 MAX															
OVERTRAVEL — — — — — .004 MIN															
THIRD ANGLE PROJECTION 					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SCALE	-	WEIGHT .003 LB MAX		SHEET 1 OF 1			
					RASTER										