




HONEYWELL PART NUMBER
11SX47-H58
PRODUCT CODE VDJ2195

REV	DOCUMENT	CHANGED BY	CHECK
4	0038448	VS 28APR08	BLR

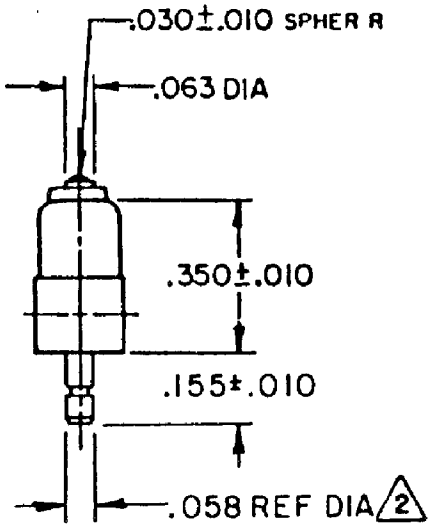

B

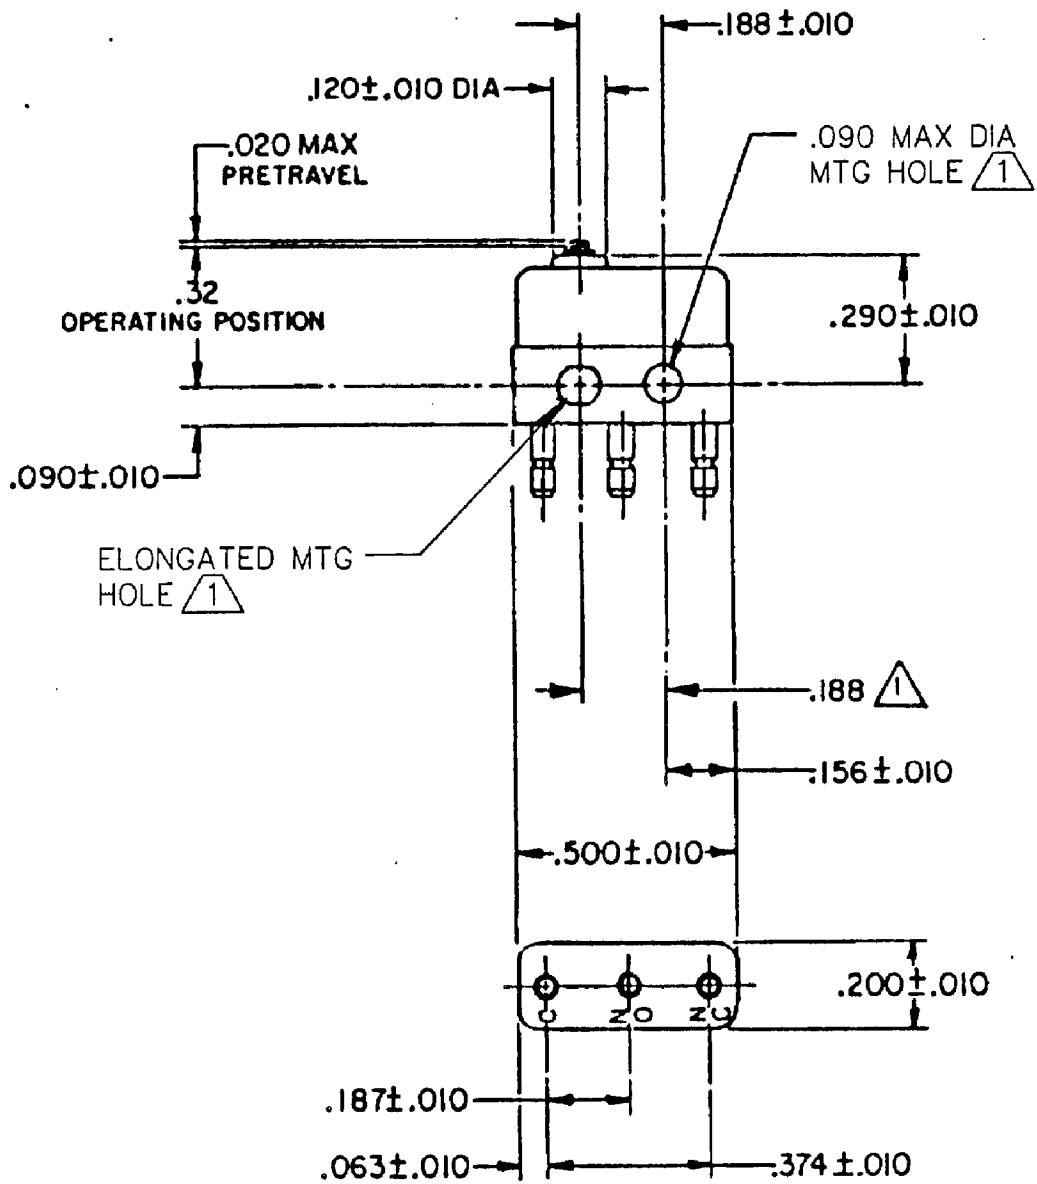

B

→

←

A

A

NOTES



- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
- 2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- 3 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.	PR - 16200
REPLACES	X87867 - SX

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	VK	05 MAR 08		Honeywell			
OPERATING FORCE — — — -3.5 OZ MAX		CONTACT ARRANGEMENT S P D T			TOLERANCES UNLESS NOTED:		CHECK	RJ	05 MAR 08					
RELEASE FORCE— — — — .75 OZ MIN		APPROVALS			NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE					
DIFFERENTIAL TRAVEL— .00010 - .00055					ONE PLACE .X ±									
OVERTRAVEL — — — — — .004 MIN					TWO PLACE .XX ±									
					THREE PLACE .XXX ±									
						FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982		SIZE	TYPE	DRAWING NAME		REV
		UL, CSA		3A, 250 VAC  		BRAND L122		OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		B	I	11SX47-H58		4
						THIRD ANGLE PROJECTION				SCALE	-	WEIGHT .003 LB MAX	SHEET 1 OF 1	
								RASTER						