


| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| 5   | 0038448  | VS 28APR08 | BLR   |

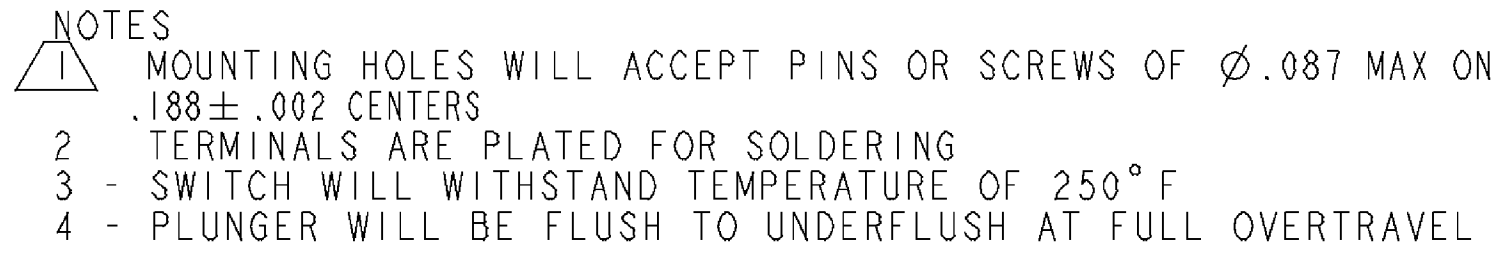

|             |            |
|-------------|------------|
| RELEASE NO. | PR-22320   |
| REPLACES    | X100608-SX |

|                                   |  |                                |                    |                 |                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 |        |  |                  |                                                                                      |         |                      |                  |                    |                                     |                             |                     |  |
|-----------------------------------|--|--------------------------------|--------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--|------------------|--------------------------------------------------------------------------------------|---------|----------------------|------------------|--------------------|-------------------------------------|-----------------------------|---------------------|--|
| CHARACTERISTICS                   |  | ELECTRICAL DATA                |                    |                 |                                                                                                                                                                            | DESIGN UNITS: INCH<br>TOLERANCES UNLESS NOTED:<br><br>NO PLACE X ±<br>ONE PLACE .X ± 0.030<br>TWO PLACE .XX ± 0.015<br>THREE PLACE .XXX ± 0.005<br>FOUR PLACE .XXXX ±<br>ANGLES ±<br><br>THIRD ANGLE PROJECTION<br> |                                                                                                                                                                 |        |  | DRAWN            | SPK                                                                                  | 12FEB08 | <div>Honeywell</div> |                  |                    |                                     |                             |                     |  |
| OPERATING FORCE — — — 6 OZ MAX    |  | CONTACT ARRANGEMENT<br>S P D T |                    |                 |                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 |        |  | CHECK            | RJ                                                                                   | 12FEB08 |                      |                  |                    |                                     | TITLE<br><br>SWITCH - BASIC |                     |  |
| RELEASE FORCE— — — 1/2 OZ MIN     |  |                                | 28 VOLTS DC RATING |                 | 115 VOLTS AC, 60 CPS                                                                                                                                                       |                                                                                                                                                                                                                                                                                                          | THIS DRAWING COVERS A PROPRIETARY ITEM<br>AND IS THE PROPERTY OF HONEYWELL.<br>THIS DRAWING IS NOT TO BE COPIED OR USED<br>WITHOUT THE PERMISSION OF HONEYWELL. |        |  |                  | INTERPRET PER ANSI Y14.5M-1982<br>OTHER HONEYWELL ENGINEERING<br>STANDARDS MAY APPLY |         |                      |                  |                    |                                     |                             |                     |  |
| DIFFERENTIAL TRAVEL— — — .001 MAX |  |                                | SEA LEVEL          | 50,000 FT       | SEA LEVEL                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 |        |  |                  |                                                                                      |         |                      |                  |                    |                                     |                             |                     |  |
| OVERTRAVEL — — — — — .010 MIN     |  | INDUCTIVE                      | 3 AMP              | 2 AMP           | 5 AMP                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 |        |  |                  |                                                                                      |         |                      |                  |                    |                                     |                             |                     |  |
|                                   |  | RESISTIVE                      | 5 AMP              | 4 AMP           | 5 AMP                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 |        |  |                  |                                                                                      |         |                      |                  |                    |                                     |                             |                     |  |
|                                   |  | -                              |                    |                 |                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 |        |  | SIZE<br><b>B</b> |                                                                                      |         |                      | TYPE<br><b>I</b> |                    | DRAWING NAME<br><br><b>11SX96-T</b> |                             | REV<br><br><b>5</b> |  |
|                                   |  | APPROVALS                      | KEMA, CE           | 5A 250 V ~ T125 | 5E4                                                                                                                                                                        |                                            |                                                                                                                                                                 |        |  |                  |                                                                                      |         |                      |                  |                    |                                     |                             |                     |  |
|                                   |  |                                | UL, CSA            | 5A 250 VAC      |   | BRAND                                                                                                                                                                                                                                                                                                    | L4L                                                                                                                                                             |        |  |                  |                                                                                      |         |                      |                  |                    |                                     |                             |                     |  |
|                                   |  |                                |                    |                 |                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                 | RASTER |  |                  |                                                                                      | SCALE   |                      | -                | WEIGHT:.003 LB MAX |                                     | SHEET 1 OF 1                |                     |  |