


REV	DOCUMENT	CHANGED BY	CHECK
4	0038448	VS 28APR08	BLR

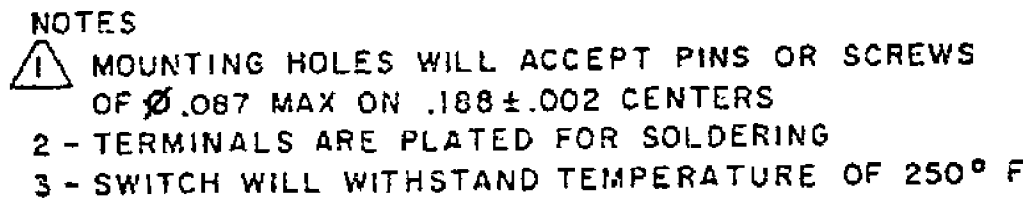

RELEASE NO.	PR-23688
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	12FEB08	Honeywell				
OPERATING FORCE — — — -3.5 OZ MAX		CONTACT ARRANGEMENT S P D T					CHECK	RJ	12FEB08					
RELEASE FORCE— — — — .75 OZ MIN		28 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL— — — .001 MAX		SEA LEVEL 50,000 FT												
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE 2 AMP -					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY							
		RESISTIVE 3 AMP -												
					THIRD ANGLE PROJECTION 		RASTER			SIZE	TYPE	DRAWING NAME		REV
		APPROVALS KEMA, CE 3A 250V ~ T125 5E4   UL, CSA 3A 250 VAC   BRAND L122A					B			I	11SX98-T		4	
								SCALE	-	WEIGHT:.003 LB MAX		SHEET 1 OF 1		