



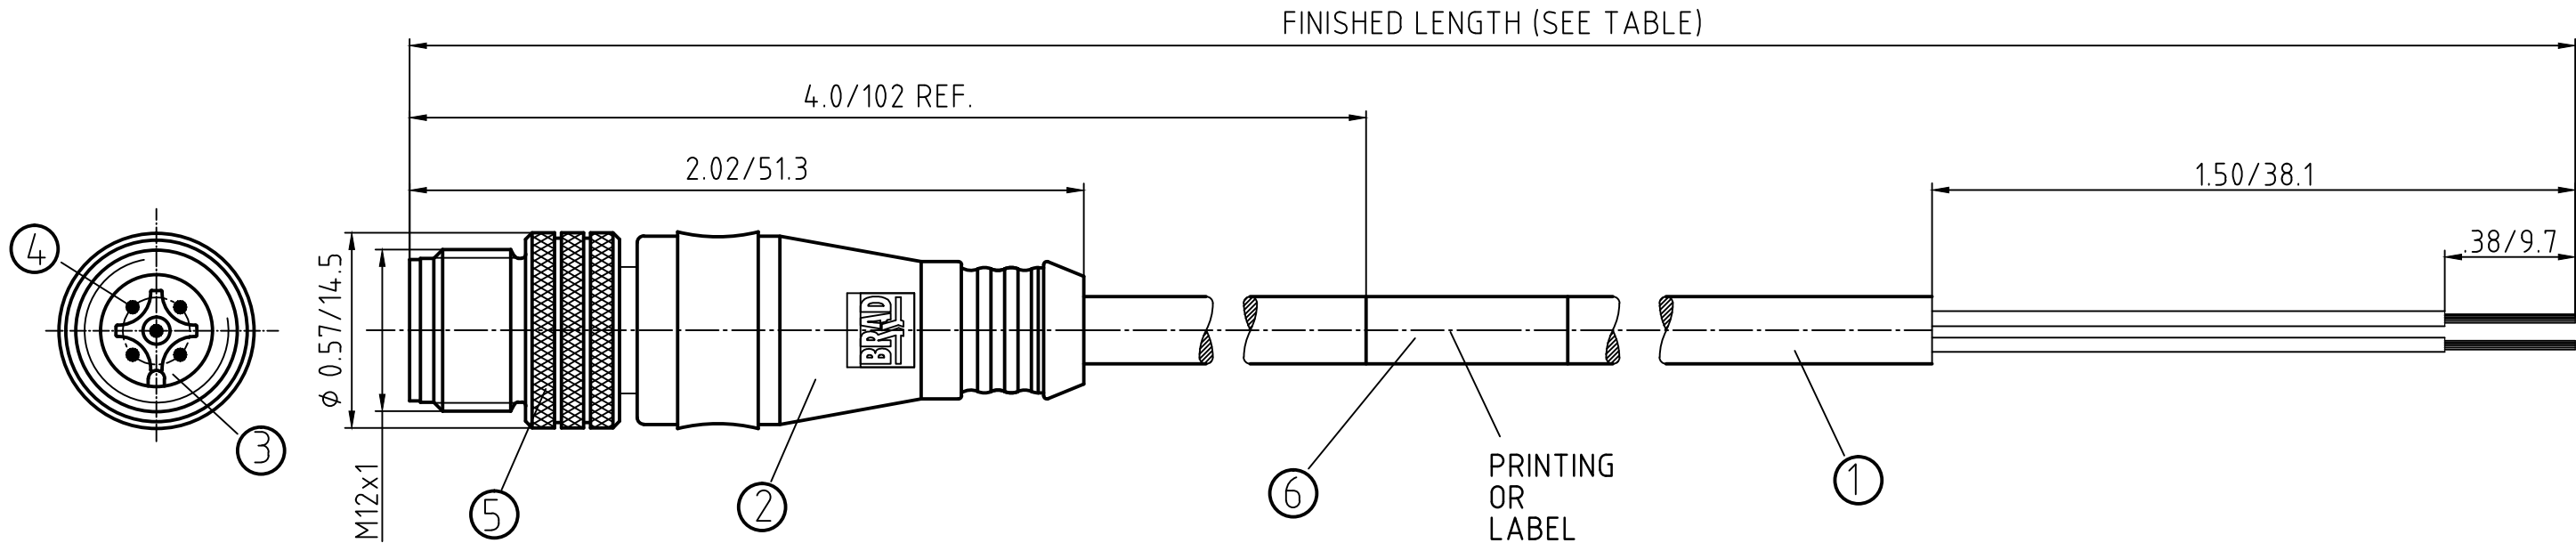


CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW

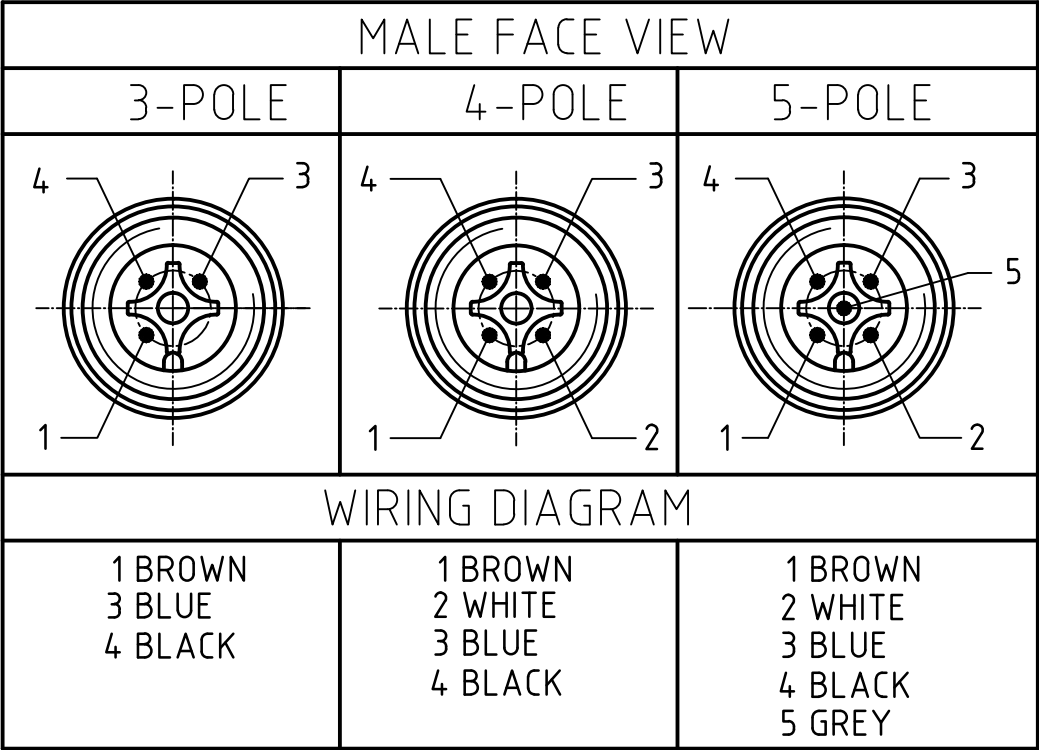

ADD P/N 1200651363 EC NO: WEU2011-0333 DRWN: L'HARTMAN CH'KD: TWOLDEGE APPR: JFMURPHY 1/5/11 2010/01/25		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
				▽ = 0 ▽C = 0		mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/01/18	MICRO-CHANGE CORDSET 3/4/5-P MALE STR SE 22/3-5 TPE YELLOW CABLE					
					4 PLACES	±---	±---	CHECKED BY RE	DATE 2010/01/21						
					3 PLACES	±---	±---	APPROVED BY NSTAUDIG	DATE 2010/01/25	molex	MOLEX INCORPORATED				
					2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE SHEET 2	DOCUMENT NO. SD-120065-036						
1 PLACE	±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
2		REV			ANGULAR ± --- °										

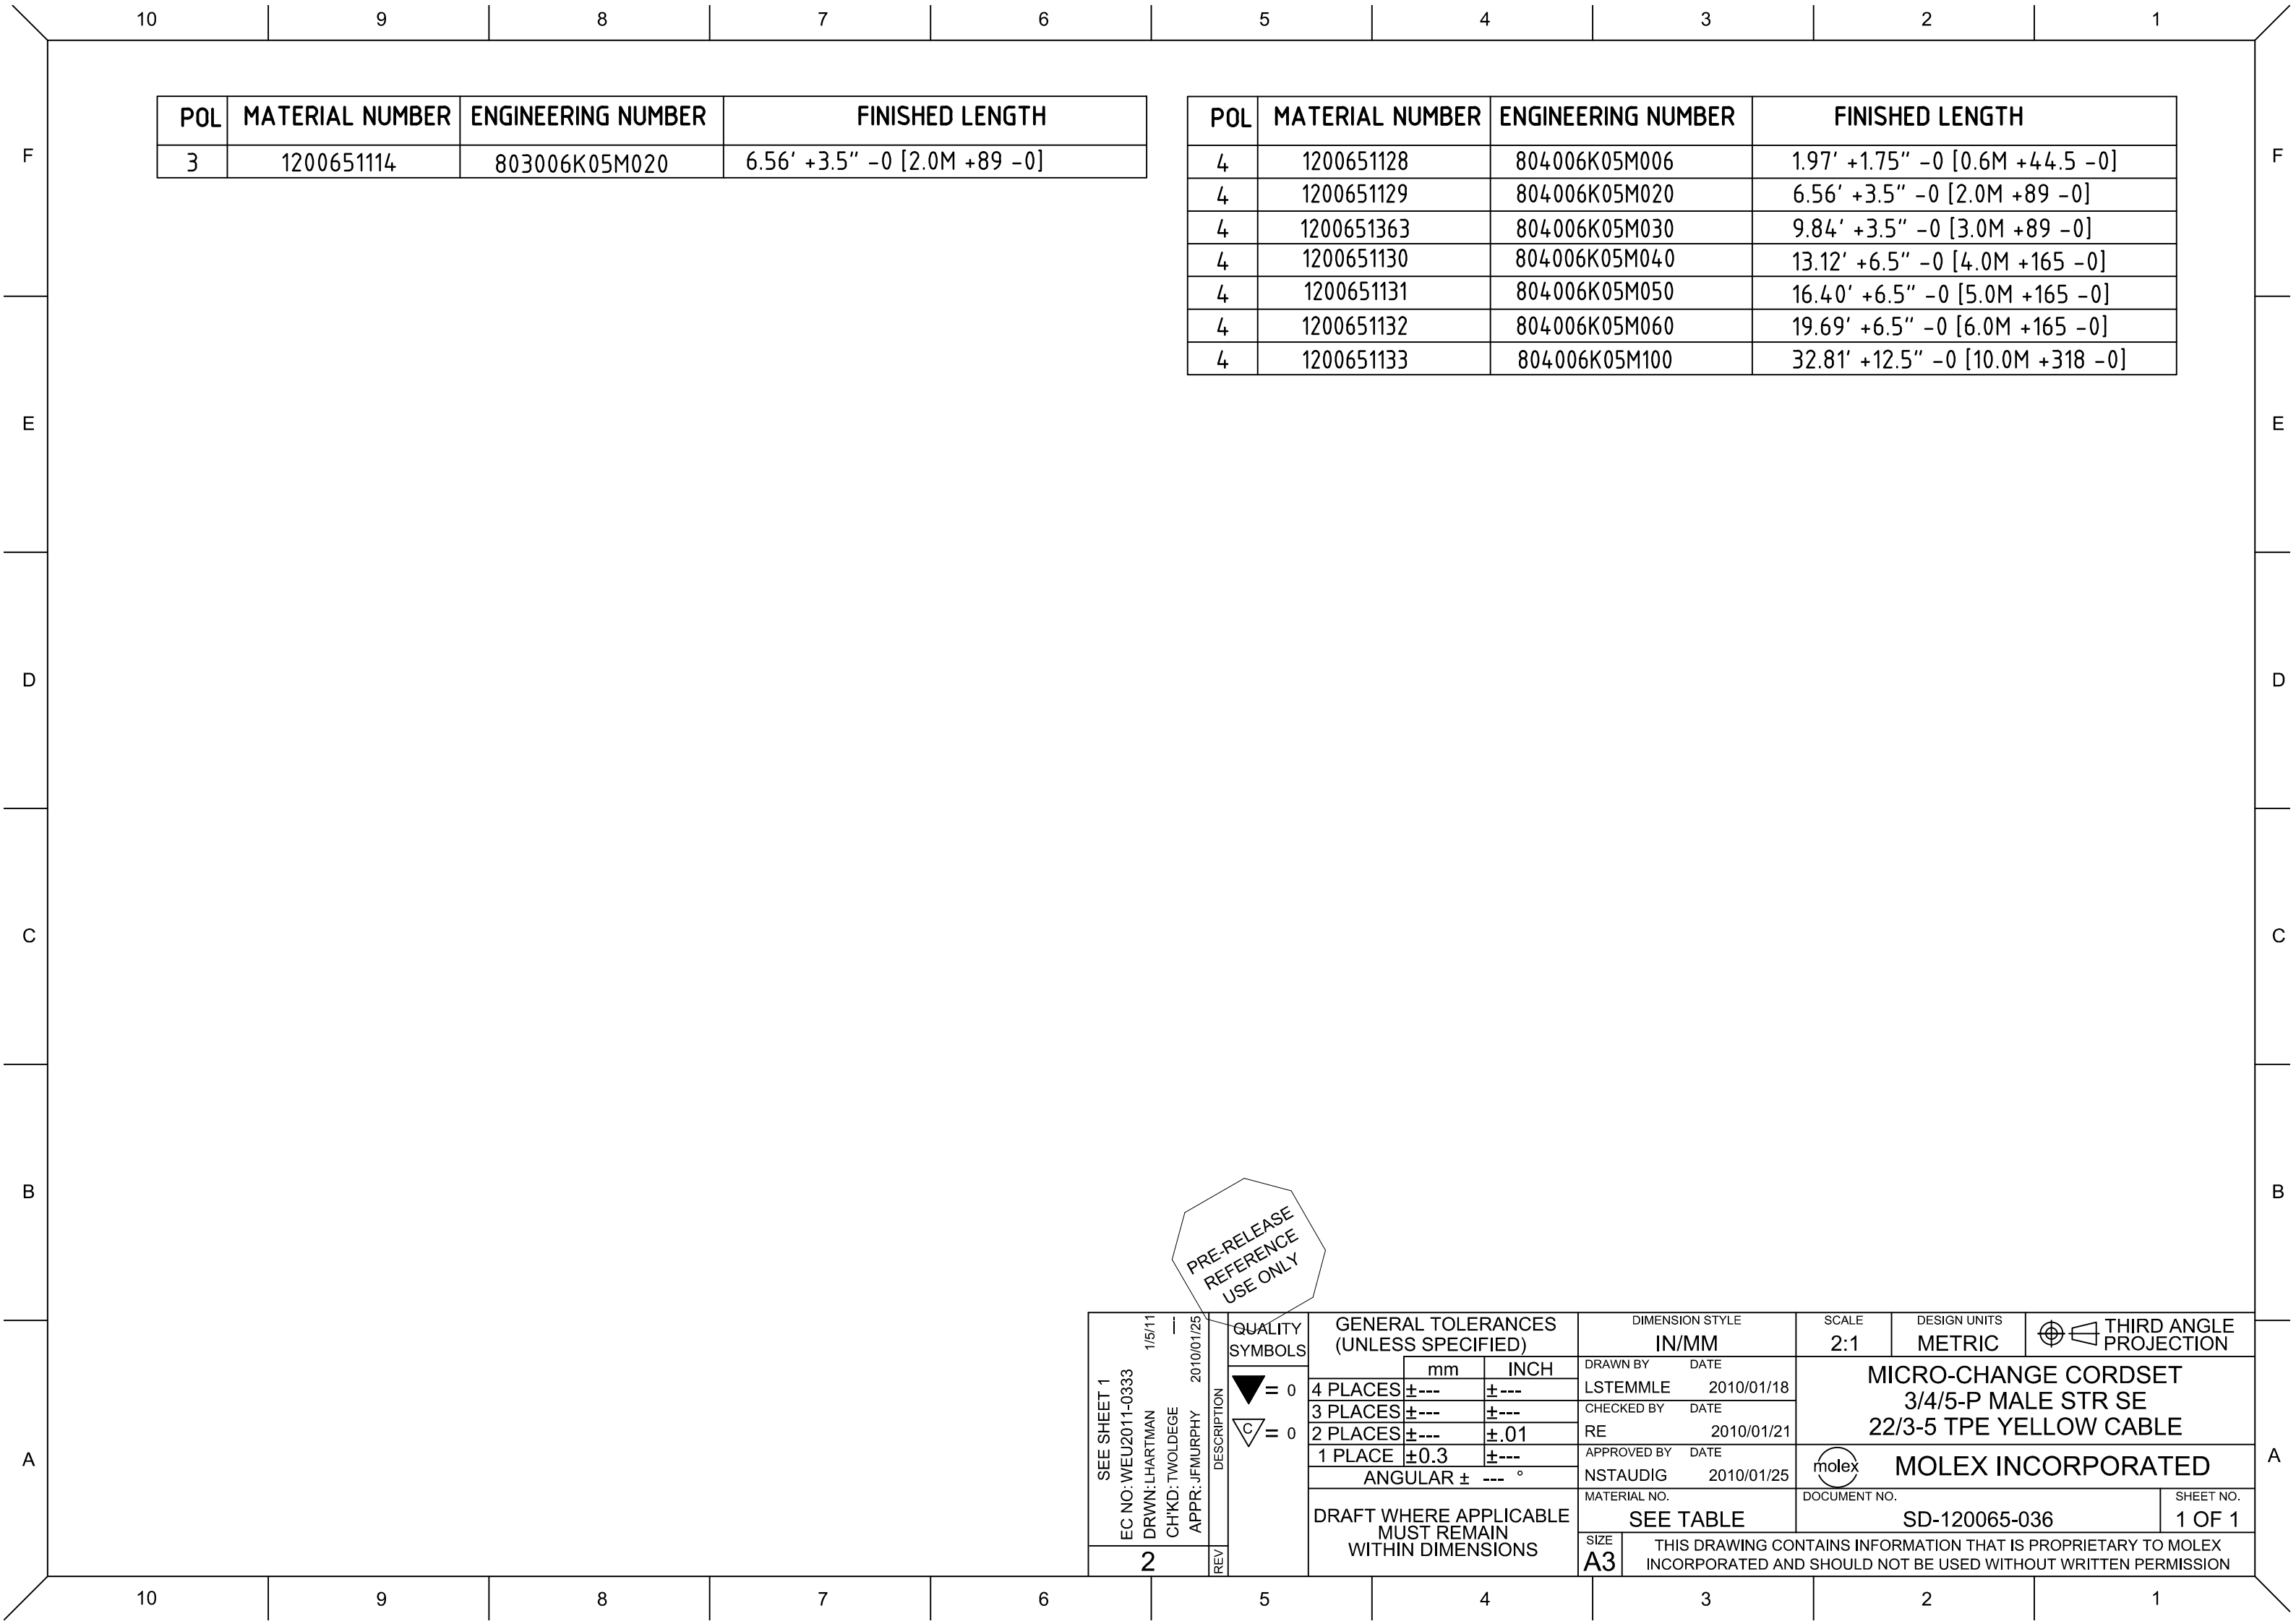

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651114	803006K05M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651128	804006K05M006	1.97' +1.75" -0 [0.6M +44.5 -0]
4	1200651129	804006K05M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651363	804006K05M030	9.84' +3.5" -0 [3.0M +89 -0]
4	1200651130	804006K05M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651131	804006K05M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651132	804006K05M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651133	804006K05M100	32.81' +12.5" -0 [10.0M +318 -0]

PRE-RELEASE
REFERENCE
USE ONLY

SEE SHEET 1 EC NO: WEU2011-0333 DRWN: LHARTMAN CHK'D: TWOLDEGE APPR: JFMURPHY 1/5/11 2010/01/25	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/01/18	MICRO-CHANGE CORDSET 3/4/5-P MALE STR SE 22/3-5 TPE YELLOW CABLE					
			4 PLACES	±---	±---	CHECKED BY	DATE						
			3 PLACES	±---	±---	RE	2010/01/21	MOLEX INCORPORATED					
			2 PLACES	±---	±.01	APPROVED BY	DATE						
			1 PLACE	±0.3	±---	NSTAUDIG	2010/01/25		SD-120065-036			SHEET NO. 1 OF 1	
			ANGULAR ± --- °			MATERIAL NO.							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE							
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						