

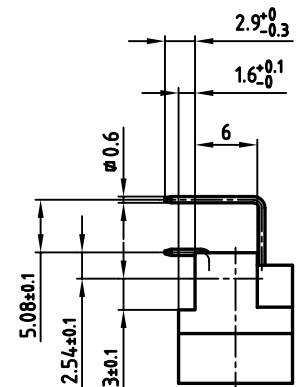
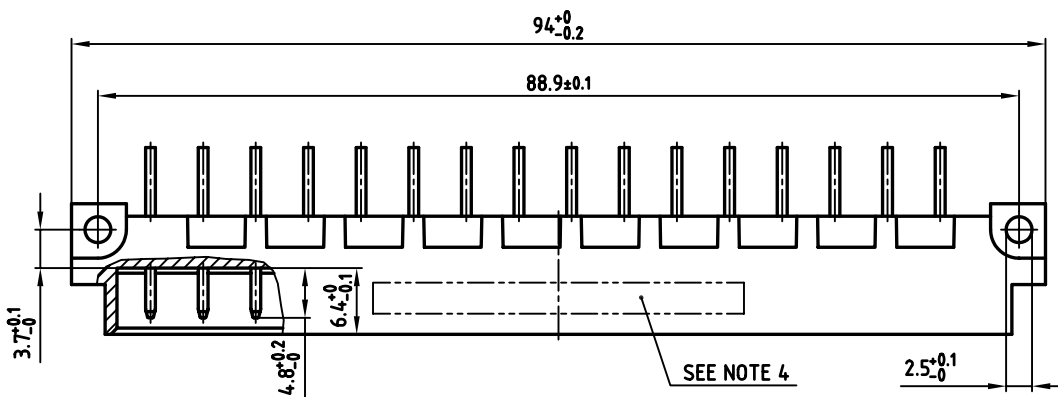


used for: DIN EN 60603 TYPE "D"

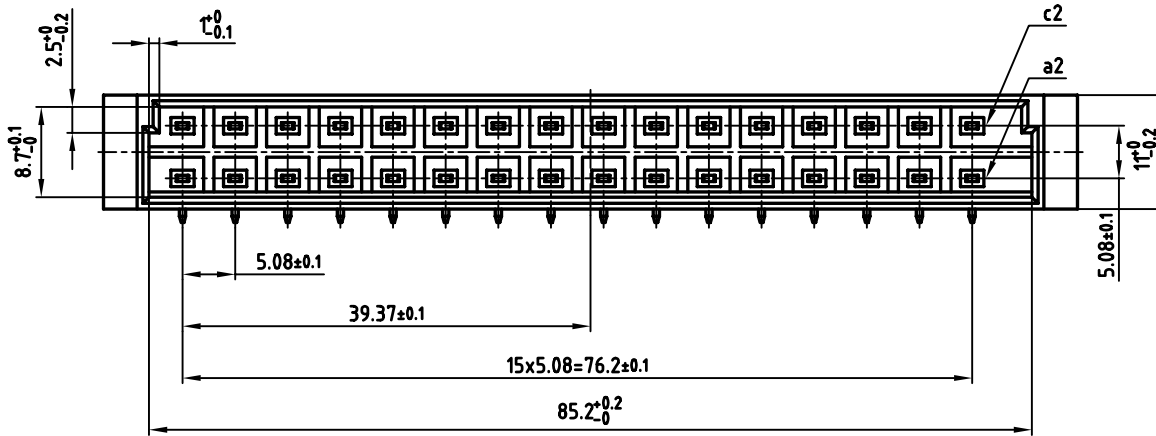

P.C.B.-HOLE DRILLINGS

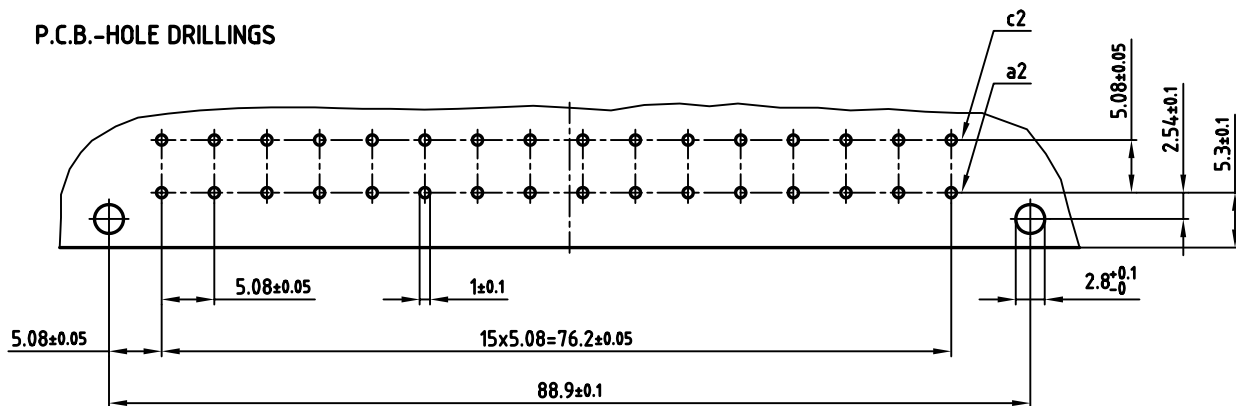

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
3. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. CONNECTOR IS PART MARKED: 121A10649X CONEC Y/WW

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	dim. in mm
2002	date
drawn	11.04.
appd.	11.04.
norm	DIN EN 60603
d-old	

scale:	2:1
material:	SEE NOTES
title:	MALE CONNECTOR TYPE "D"
	32pos. angled
dwg no:	AutoCAD 2000
	DIN-A
	3
	sh: 1/1
part no:	121A10649X

CONEC