
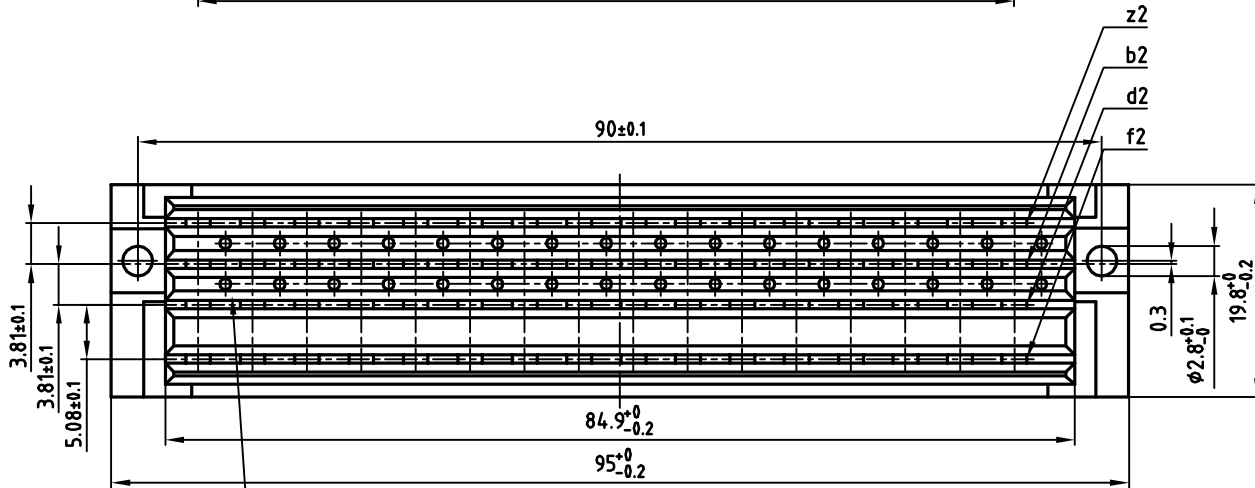



used for: DIN 41612 (EN 60603-2) "G"

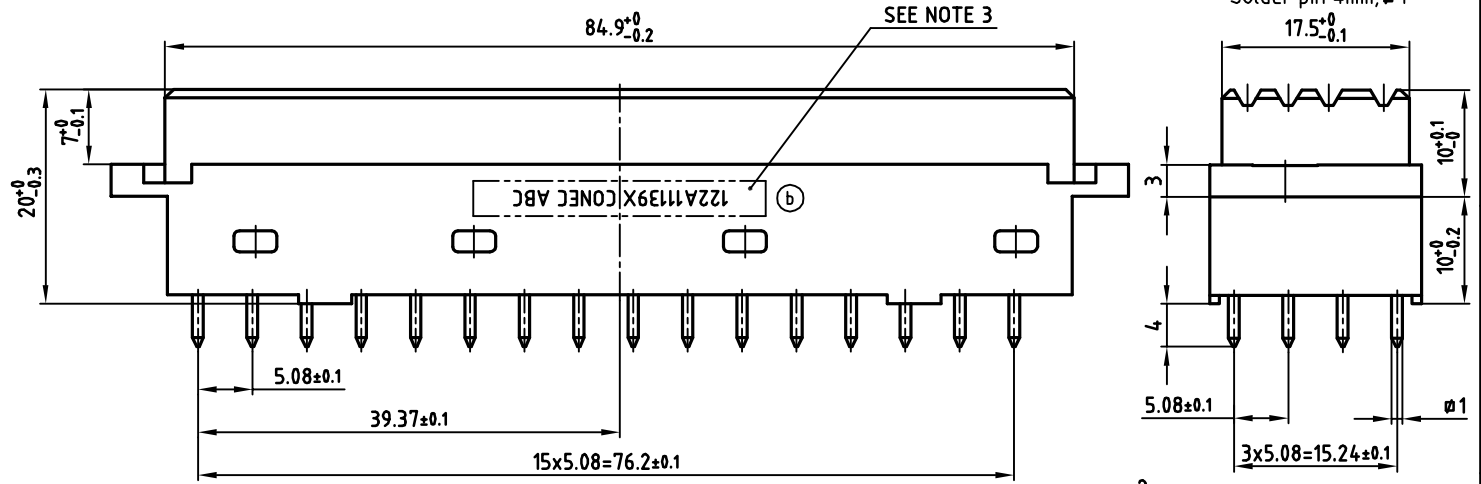

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD over NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 122A11139X CONEC ABC

PCB-Hole pattern

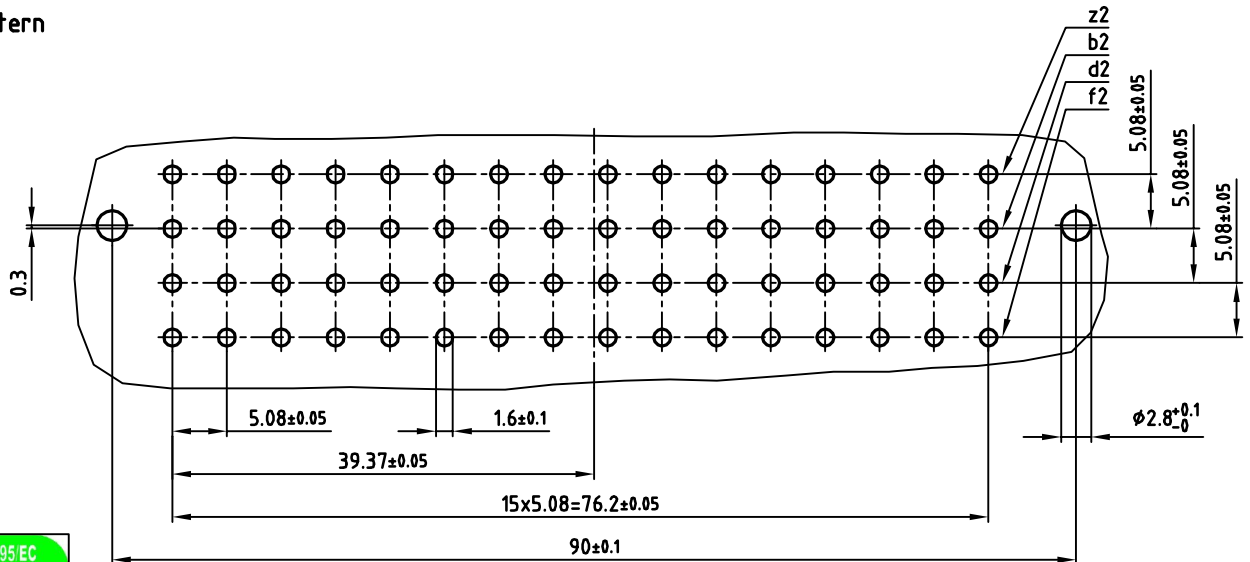

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND			
1 x b	Ä3203	01.12.2008	Petker
a	Origin		
rev.	description	date	name

tolerance		dim. in mm
2007	date	
drawn	10.04.	
appd.	10.04.	
norm	DIN 41612 (EN 60603-2)	
d-old		

scale: 2:1	
material: SEE NOTES	
title: Female connector Type "G" 64Pos. Solder pin straight, 1x1mm	
dwg no:	AutoCAD 2006 DIN-A
	12K2IH5A 3
part no:	122A11139X sh: 1/1