
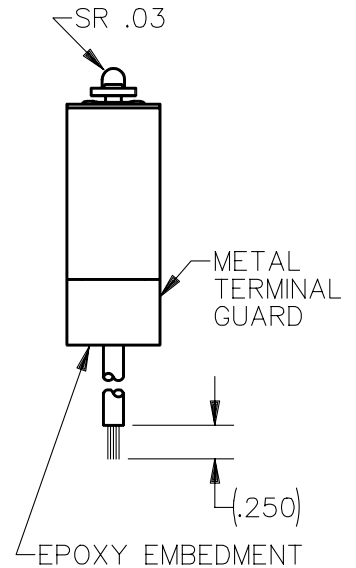
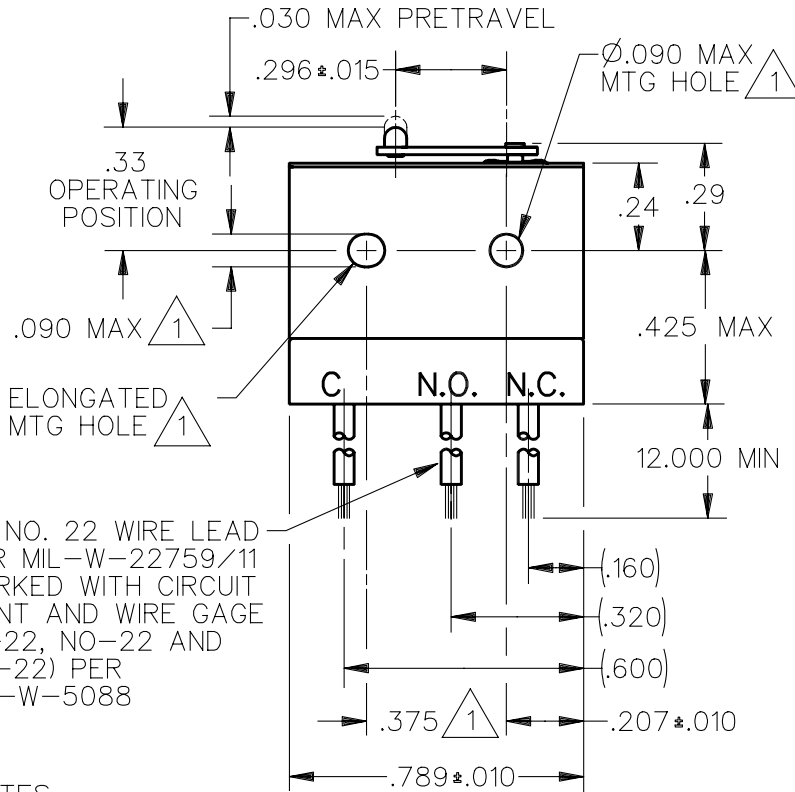


CATALOG LISTING
PAGE 1 OF 1
REPLACES
PR-20015
CHECK
M
4
ISSUE

REVISIONS

A	PR-20015	S A V	15 APR 92
B	CO-80928	D L T	28 JUN 95
C	CO94220	D L T	23 MAR 99

DDM/CAD
DRAWN
S A V
15 APR 92
CHECK

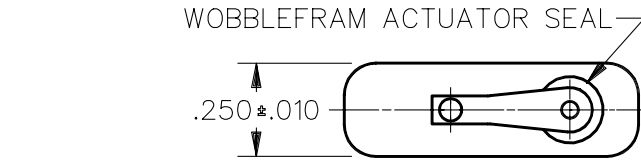

3X NO. 22 WIRE LEAD
PER MIL-W-22759/11
MARKED WITH CIRCUIT
IDENT AND WIRE GAGE
(C-22, NO-22 AND
NC-22) PER
MIL-W-5088


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375 ± .002 CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -85°F TO +257°F
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
- 5 WEIGHT OF SWITCH ONLY IS 0.22 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 0.065 OZ MAX PER FOOT
- 6 - DO NOT APPLY MORE THAN 1 1/2 INCH-POUNDS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
- 7 - SWITCH WILL REMAIN FUNCTIONAL AFTER BEING SUBJECTED TO THE SHOCK OF MIL-S-901 GRADE A, SUBASSEMBLY, CLASS I, LIGHTWEIGHT TYPE C

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA			SCALE 2:1	DO NOT SCALE PRINT
OPERATING FORCE — — — 7 OZ MAX	CONTACT ARRANGEMENT S P D T			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
DIFFERENTIAL FORCE					
RELEASE FORCE — — — 1 OZ MIN	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	ONE PLACE (.0)	± .030
PRETRAVEL	SEA LEVEL 70,000 FT 28 VDC	1 AMP	3 AMP	TWO PLACE (.00)	± .015
DIFFERENTIAL TRAVEL — — — .006 MAX				THREE PLACE (.000)	± .005
OVERTRAVEL — — — — — .003 MIN	SEA LEVEL 115 VAC (400 CYCLE)	1 AMP	1 AMP	ANGLES	± ***
FREE POSITION				WEIGHT / 5	