

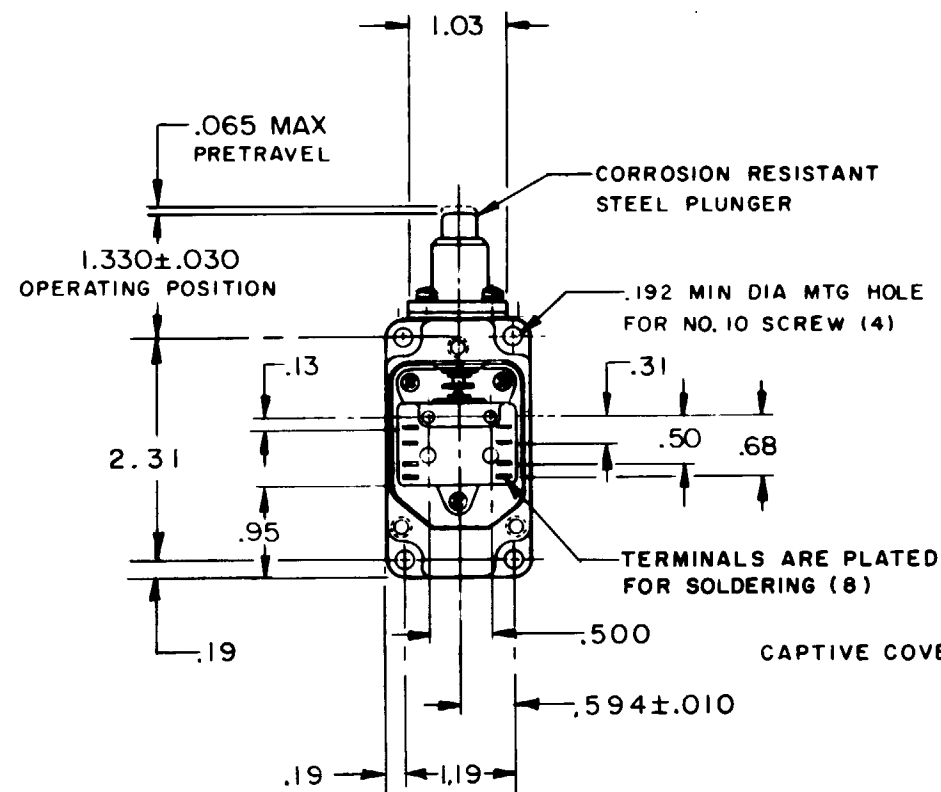
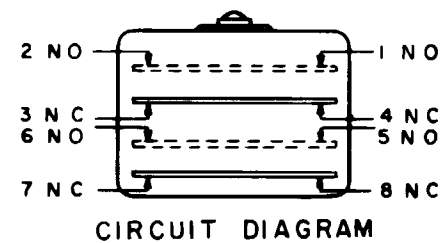
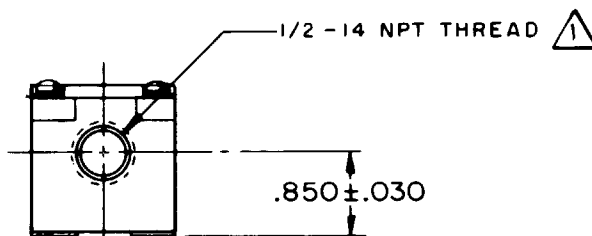


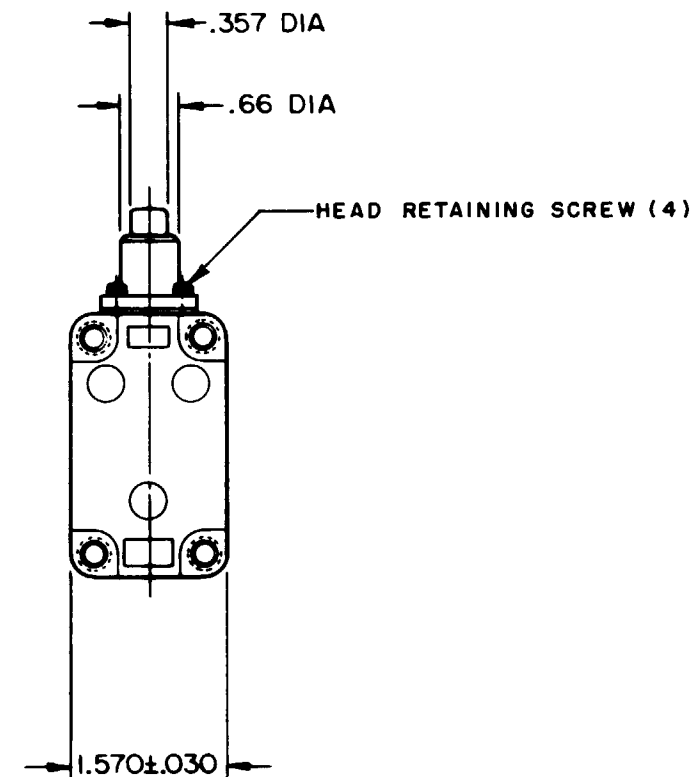

CAPTIVE COVER SCREW(3)

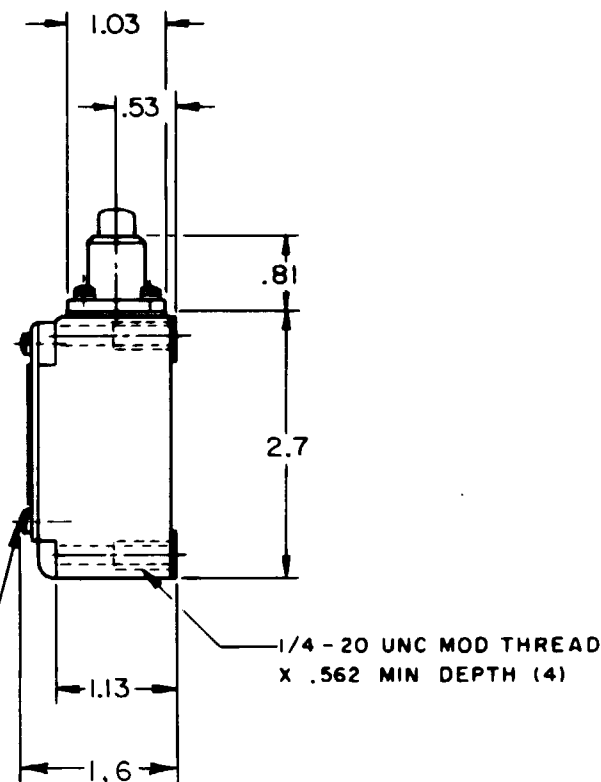

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING FORCE — — — 7 LB MAX ③	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
RELEASE FORCE — — — — 2 LB MIN	② 10 A-125 OR 250 VAC 1/2 HP-125 VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
RELEASE TRAVEL — — — — .015 MIN		TOLERANCES ARE:
DIFFERENTIAL TRAVEL — — — .045 MAX		ONE PLACE (.0) ±.030
OVERTRAVEL — — — — .250 MIN		TWO PLACE (.00) ±.015
SWITCH-BASIC REPLACEMENT — — — 8AS42		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT

NOTE -

① SEAL TO BE FURNISHED BY USER

12LS1

M

DRAWING NUMBER

6

ISSUE

6

REVISIONS

A	CO15200	MBF	27 APR 64
B	CO20461	RER	1 SEP 65
C	CO24612	RER	15 OCT 68
D	CO 50952	KAG	3 FEB 83
E	CO-77031	JDB	22 DEC 93

22 DEC 93

12 MAY 64

DAW

CHECK

27 APR 64

MBF

FO-80378-003