


REV	DOCUMENT	CHANGED BY	CHECK
7	0038111	PK 20MAY08	ASD

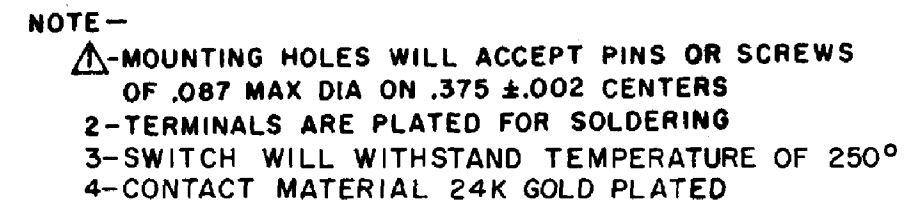

RELEASE NO.	E T S SR 9650
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	17OCT07		Honeywell					
OPERATING FORCE – – – – 3 - 5 OZ		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	17OCT07							
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING				NO PLACE X ±				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC					
						ONE PLACE .X ± 0.030													
DIFFERENTIAL TRAVEL – – – .004 MAX						TWO PLACE .XX ± 0.015													
OVERTRAVEL – – – – – .003 MIN						THREE PLACE .XXX ± 0.005													
		INDUCTIVE 1/2 AMP 1/2 AMP				FOUR PLACE .XXXX ±				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV	
		RESISTIVE 1 AMP 1 AMP				ANGLES ±								B	I	12SM4-T		7	
		MAXIMUM INRUSH 2 AMP				THIRD ANGLE PROJECTION				RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1		
		APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4				BRAND	L 22										
			UL, CSA	1A, 125 VAC															