
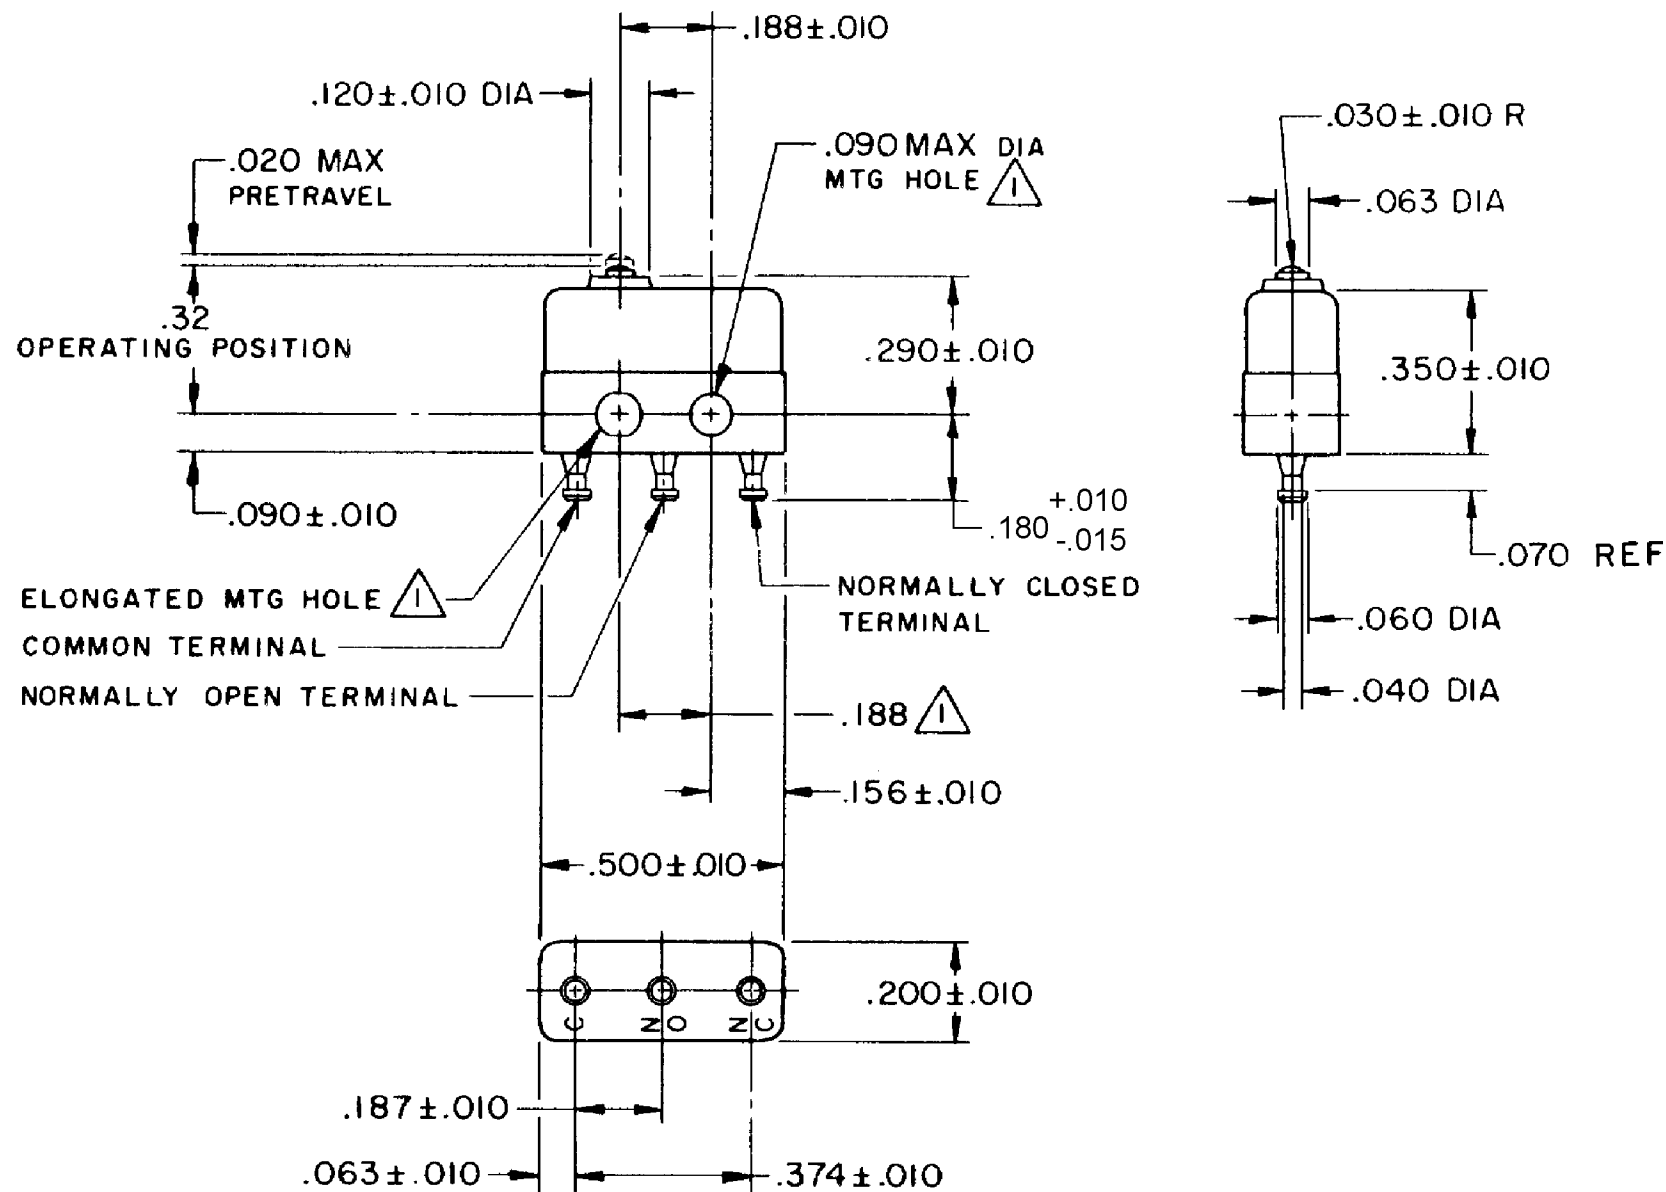


REV	DOCUMENT	CHANGED BY	CHECK
12	0060324	VKR 13JAN10	CMH

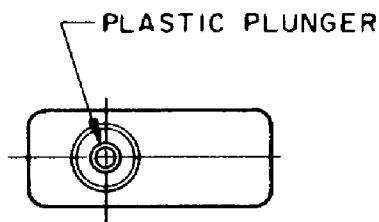

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON $.188 \pm .002$ CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 - MOVABLE CONTACT MATERIAL-24K SOLID GOLD
- 5 - STATIONARY CONTACT MATERIAL-GOLD ALLOY

RELEASE NO.	PR-1257-T
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	13FEB08	Honeywell						
OPERATING FORCE — — — - 2.5-5 OZ		CONTACT ARRANGEMENT S P D T					CHECK	RJ	13FEB08							
RELEASE FORCE— — — — - 1 OZ MIN		30 VOLTS DC RATING			.030 .015 .005 THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE					SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .002 MAX		SEA LEVEL 50,000 FT														
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE 0.5 AMP 0.5 AMP					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY					SIZE	TYPE	DRAWING NAME		REV
		RESISTIVE 1 AMP 1 AMP										B	I	12SX2-T		12
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 		RASTER			SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1			
		APPROVALS KEMA, CE 1A 250 V ~ T125 25E3  UL, CSA 1A 125 VAC  BRAND L22J														