



CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


CURRENT CAPACITY (AMPS)								
RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
DC VOTLS			AC VOLTS					
28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
20	.75	.5	15	6	7	4	15	15

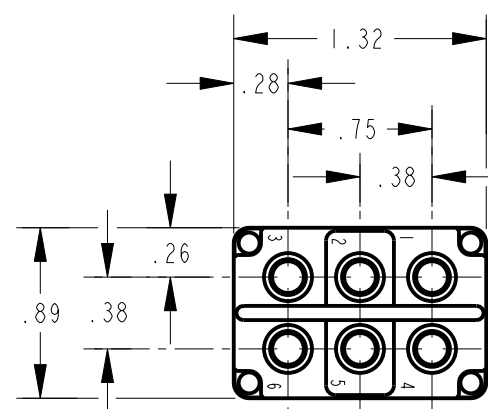

CIRCUIT MADE WITH TOGGLE LEVER IN



MAINTAINED POSITION

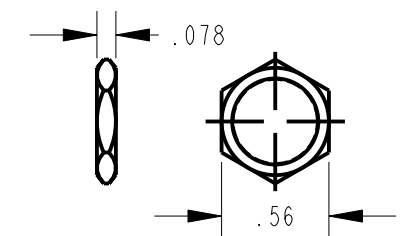


2X HEX NUT  3

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	$\pm .030$
-----------	------	------------

TWO PLACE (.00) $\pm .015$

TWO PLACE	(.00)	+ .015
THREE PLACE	(.000)	+ .005

THREE PLACE	(.000)	±.0
ANGLES		+

WEIGHT

ELECTRICAL RATING

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

